



The Mekong River Commission Secretariat



## Integrated Flood Risk Management Plan for the Lower Xe Bangfai area in Lao PDR

The Flood Management and Mitigation Programme,  
Component 2: Structural Measures & Flood Proofing  
in the Lower Mekong Basin

December 2009

Draft Final Report, Volume 6B



HASKONING NEDERLAND B.V.

UNESCO IHE



## **Guide to the reporting structure of the Flood Management and Mitigation Programme - Component 2, Structural Measures and Flood Proofing**

Component 2 on Structural Measures and Flood Proofing of the Mekong River Commission's Flood Management and Mitigation Programme was implemented from September 2007 till January 2010 under a consultancy services contract between MRCS and Royal Haskoning in association with Deltares and Unesco-IHE. The Implementation was in three Stages, an Inception Phase, and two implementation Stages. During each stage a series of outputs were delivered and discussed with the MRC, the National Mekong Committees and line agencies of the four MRC member countries. A part of Component 2 - on 'Roads and Floods' - was implemented by the Delft Cluster under a separate contract with MRC.

The consultancy services contract for Component 2 specifies in general terms that, in addition to a Final Report, four main products are to be delivered. Hence, the reports produced at the end of Component 2 are structured as follows:

### **Volume 1      Final Report**

### **Volume 2      Characteristics of Flooding in the Lower Mekong Basin:**

*Volume 2A      Hydrological and Flood Hazard in the Lower Mekong Basin;*  
*Volume 2B      Hydrological and Flood Hazard in Focal Areas;*  
*Volume 2C      Flood Damages, Benefits and Flood Risk in Focal Areas, and*  
*Volume 2D      Strategic Directions for Integrated Flood Risk management in Focal Areas.*

### **Volume 3      Best Practice Guidelines for Integrated Flood Risk Management**

*Volume 3A      Best Practice Guidelines for Flood Risk Assessment;*  
*Volume 3B      Best Practice Guidelines for Integrated Flood Risk Management Planning and Impact Evaluation;*  
*Volume 3C      Best Practice Guidelines for Structural Measures and Flood Proofing;*  
*Volume 3D      Best Practice Guidelines for Integrated Flood Risk Management in Basin Development Planning, and*  
*Volume 3E      Best Practice Guidelines for the Integrated Planning and Design of Economically Sound and Environmentally Friendly Roads in the Mekong Floodplains of Cambodia and Vietnam<sup>1</sup>*

### **Volume 4      Project development and Implementation Plan**

### **Volume 5      Capacity Building and Training Plan**

### **Demonstration Projects**

Component 2 prepared five Demonstration Projects which have been reported separate from the main products:

*Volume 6A      Flood Risk Assessment in the Nam Mae Kok basin, Thailand;*  
*Volume 6B      Integrated Flood Risk Management Plan for the Lower Xe Bangfai basin, Lao PDR;*  
*Volume 6C      Integrated Flood Risk Management Plan for the West Bassac area, Cambodia;*  
*Volume 6D      Flood Protection Criteria for the Mekong Delta, Vietnam*  
*Volume 6E      Flood Risk Management in the Border Zone between Cambodia and Vietnam*

The underlying report is **Volume 6B** of the above series.

---

<sup>1</sup> Developed by the Delft Cluster



## SUMMARY

This report presents the findings of the FMMP-C2 Demonstration Project that aims to assist Lao PDR in formulating an Integrated Flood Risk Management Plan for the Lower Xe Bangfai area in central Lao.



### Flood Hazard


The flood hazard has been assessed with the ISIS Xe Bangfai model, using the most up to date data on the physical representation of the existing infrastructure and boundary conditions for discharges, local rainfall, water use etc. Flood hazard has been analyzed with historical time series of discharges in the Mekong and the Xe Bangfai River. Since flooding is affected by backwater from the Mekong, multi-variate statistical analysis was applied to determine the combined effect of flows in the two rivers on water levels in the floodplains. The bed level of the Mekong changes as a result of changes in sediment transport and causes considerable variation in water levels. The flood hazard assessment therefore was also carried out with 0.75 m higher and 0.75 m lower levels in the Mekong. Flood hazard maps have been produced for various exceedance frequencies of flow in the rivers for the current conditions and for a number of flood protection scenarios.

### Flood Damages

The flood damages have been assessed through analysis of official flood damage data as is being inventoried by Nongbok district<sup>2</sup>. The data has been categorized in three groups, damages to i) a wide range of public services facilities, referred to as "Infrastructure", ii) domestic properties referred to as "Housing", and iii) "Agriculture", comprising also losses in aquaculture. Flood damages have first been translated into flood damage curves, relating damages to (maximum) water levels based on eight years of available damage data. The simulated water level series were then subjected to the flood damage functions to produce the flood damage probability curves for each of the three damage categories (and the total). Damages are essentially in agriculture (88%)

<sup>2</sup> For reasons of limited resources and time, field surveys and analysis were carried out mainly in Nongbok district under the assumption that the socio-economic conditions in the other districts are similar, and that extrapolation to the left bank flood prone areas is possible.

and Infrastructure (11%), damages to Housing are negligible showing that people are adapted to living with the flood.

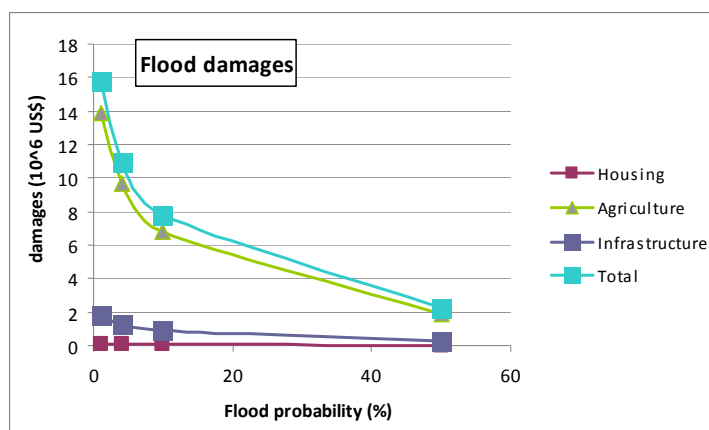

### Flood Risk

Through integration of the flood damage probability curves, the annual flood risks have been determined for a series of probabilities of exceedance. For example the risk at a 1% probability of exceedance of water levels, amounts to about US\$ 3 mln in total. This means that by protecting this area against floods up to the level of 1% probability of exceedance, on average US\$ 3 mln per year will be saved through reduction in flood damages.

#### Flood Risk in Nongbok District (US\$ mln/year)

P(%)	T(year)	Flood Risk (mln US\$/year)		
		I	H	A
1%	100	0.36	0.01	2.58
2%	50	0.34	0.01	2.46
5%	20	0.30	0.01	2.14
10%	10	0.25	0.01	1.74
25%	4	0.14	0.00	0.94
50%	2	0.08	0.00	0.47

### Integrated Flood Risk Management Strategy

The main objective of the plan is to reduce the flood risks. This can be achieved by either reducing the flood hazard with the help of structural measures or by reducing the vulnerability or a combination of both.

#### Reduction of flood hazard

The reduction of the flood hazard can in principle be achieved by:

- (i) Creation of flood retention capacity in or upstream of the flood prone area reducing peak discharges and peak water levels in the river and floodplains.
- (ii) Creation of additional discharge capacity of the river system reducing the peak water levels. This can be achieved by deepening and or widening of the river itself or by creating additional capacity in a diversion and/or by-pass canal.
- (iii) Construction of embankment schemes that protect areas against high water levels.
- (iv) Construction of gates that prevent floods to enter the Xe Bangfai floodplains.
- (v) Improvement of the drainage system in the flood plains reducing the duration of flooding. Further reduction of the duration of flooding can be obtained by the

installation or rehabilitation of gates and or pump stations at the locations where the drainage system discharges into the Xe Bangfai or the Mekong River.

Regarding the creation of flood retention capacity, a project idea was identified concerning the construction of a storage reservoir in the Xe Bangfai at the confluence with the Xe Noy, just upstream of the Road 13 crossing, combined with construction of a flood gate in the Xe Bangfai mouth. This option has been discarded for reasons of far-reaching resettlement needs, impact on environment and costs.

The floodplains have their own natural retention capacity. The creation, reservation and/or enhancement of retention capacity in the flood prone area is, therefore, only relevant in combination with the implementation of embankments. In that case, part of the flood plain can be protected while another part is reserved for the retention of flood waters. The proportion between the 2, 'how much is to be protected?' versus 'how much must be reserved for retention?', is a political choice that ought to be agreed amongst the different stakeholders. The retained flood water might be appreciated as water for irrigation in the dry seasons.

For the creation of additional discharge capacity, reference is made to previous studies on the flood diversion canal 'Xelat' from Banne Sokbo to Banne. A flood diversion option is thought to be cost wise much more attractive than increasing the discharge capacity of the river channel itself. The diversion option will reduce the peak levels along the Xe Bangfai upstream and downstream of the diversion canal off-take point.

Nongbok district developed ideas that focus on drainage improvement rather than on flood protection. A number of 23 schemes have been identified for widening and deepening of natural drains to be provided with gates at the confluence with Xe Bangfai or Mekong. These schemes try to achieve a reduction of the inundation time of flooded area to 15 days or less.

#### *Reduction of flood risks*

The strategic direction for flood risk management is closely related with the envisaged future land use scenarios. The risk under the present land use conditions is relatively high: though the actual cropping patterns are tuned to the flood cycle the total risk under the actual conditions is still in the order of US\$ 3 mln per year in the Nongbok district alone. Assuming similar socio-economic conditions prevail in the left bank floodplains, the total risk amounts to over US\$ 6 mln per year

#### *Reduction of flood vulnerability*

The flood risk in the lower Xe Bangfai area is mostly due to damages to the wet season crop. Vulnerability reduction is therefore most effective if the vulnerability of the agricultural production is reduced. This can be done by adapting the cropping pattern to the flood regime and/or the introduction of more flood resistant crops. It is most likely that the actual cropping pattern is already optimally adjusted to the flood regime (traditional coping mechanism) and that further vulnerability reduction is to be sought in the use and/or development of less vulnerable varieties.

#### *Selected strategy*

It is anticipated that substantial reduction of the existing risk can be achieved by reduction of the duration of flooding. Hence, flooding would not be eliminated completely in order to preserve the important wetland areas and fisheries benefits. Controlled flooding can be used in that approach.

The option of embankments along the river banks and controlled flooding with drainage improvement in combination with gating of the small Xe Bangfai tributaries can be attractive to achieve this goal.

### **Flood protection for agricultural development**

Khammouane and Savannakhet provinces have expressed desire to develop the agricultural sector in the lower Xe Bangfai floodplains by having a larger irrigated area. However, irrigation schemes are at present used for about 50% of the areas, these small schemes are located on the river levees and are not seriously affected by flooding. Though there is a potential for new irrigation schemes, the focus should first be on the rehabilitation of the existing schemes so that these can be used to their full extent.

### **The proposed plan**

After an initial environmental examination and stakeholder consultation in Nongbok district and evaluation of a number of options for embankments with or without a diversion canal, the proposed IFRM plan should best consist of the following elements:

- Construction of flood protection embankments on both banks of the Xe Bangfai River downstream of the road crossing, designed to protect the areas up to frequencies of exceedance of river discharges of 1% (1 : 100 year), total length of 127 km;
- Rehabilitation or upgrading of 20 sluice gates at the confluences of the natural drains with the Xe Bangfai, allowing for controlled flooding of the wetlands and improved internal drainage;
- Construction of eight drainage pump stations;
- Establishment of water management bodies with representatives of all relevant stakeholders that will be responsible for the management of the systems and for monitoring the socio-economic and environmental impacts of the plan.

The costs of the plan<sup>3</sup> have been estimated at US\$ 34.3 mln. With the flood risk reduction benefits of US\$ 6.1 mln per year, the economic internal rate of return is estimated at 20%.

Plan implementation is estimated to take five years.

The option with a diversion canal (and embankments) would have an optimal bottom width of 125 m and a depth of more than 4 m. However, the option with a diversion canal turns out to be US\$ 4.2 mln more costly and yields a 1.6 percentage-points lower internal rate of return. The diversion canal option should however not yet be discarded completely on these grounds because it would also reduce flood levels upstream of the bridge for which the additional benefits could not be estimated at this stage.

The plan could be sub-divided into a number of projects at provincial or district level and be divided in phases. For project preparation and implementation the embankments could best be split-up in two sections in both provinces (four sections in total). In order to achieve coherence in project preparation, the gates and pumping stations should be an integral part of the embankment projects.

---

<sup>3</sup> excluding the rehabilitation of 15 gates that will be undertaken by the NTPC.



**TABLE OF CONTENTS**

1	INTRODUCTION	1
1.1	Background of the Demonstration Project	1
1.2	Contents of the report	2
2	PROJECT AREA	3
2.1	Location	3
2.2	Population and living situation	3
2.2.1	Population	3
2.2.2	Land use and tenure	4
2.2.3	Housing and other structures	5
2.2.4	Economic activities	7
2.2.5	Access to electricity, water and sanitation	8
2.2.6	Access to health care	8
2.3	Climate and meteorology	9
2.4	Infrastructure	9
2.4.1	Roads	9
2.4.2	Flood management infrastructure	9
2.5	Navigation	9
2.6	Agriculture	10
2.6.1	Rice cropping	11
2.6.2	River bank vegetables	12
2.6.3	Upland crops	13
2.6.4	Use of agrochemicals and fertilizers	13
2.6.5	Crop benefits	14
2.7	Fisheries	14
2.8	Aquaculture	16
2.9	Livestock and animal husbandry	17
2.10	Natural Environment	17
2.11	Other ecosystem services	18
2.12	Industry	18
3	FLOODS AND FLOODING	19
3.1	Flood characteristics	19
3.2	Social perception of flooding	22
3.3	Community preparedness to flooding	23
3.4	Flood hazards	24
3.5	Flood damages	27
3.6	Annual flood risk	27
3.7	Flood benefits	28
4	STRATEGIC DIRECTIONS FOR FLOOD RISK MANAGEMENT	29
4.1	Introduction	29
4.2	Reduction of flood hazard	29
4.3	Reduction of flood risks	30
5	THE LOWER XE BANGFAI PROJECT	31
5.1	Structural measures for flood management	31
5.2	Proposal 1	31
5.2.1	Alternative 1: Dyke construction in three phases	31
5.2.2	Alternative 2: One step embankment construction	33
5.2.3	Alternative 3: flood diversion canal	34

5.3	Proposal 2	36
5.4	Impact of proposals on flood hazards	37
5.5	Future agricultural development	41
5.5.1	Staple rice	41
5.5.2	Commercial rice	42
5.5.3	Sugarcane	43
5.5.4	Cotton	43
5.5.5	Crop calendar	44
5.5.6	Future without project	44
5.5.7	Future with flood protection project	45
5.5.8	Future with flood protection and irrigation project	45
5.6	Preliminary engineering design	46
5.7	Cost estimate of works	47
5.8	Project phasing	48
6	PUBLIC PARTICIPATION IN PROJECT PREPARATION	49
6.1	Public Participation strategy	49
6.2	Public Participation Plan	49
6.3	Best practice guideline	49
6.4	Training of NMC and Line Agencies in facilitating public participation	49
6.5	Stakeholder consultation	50
6.5.1	Feedback from Line agencies	50
6.5.2	Feedback from communities	51
7	SOCIAL IMPACT	53
8	INITIAL ENVIRONMENTAL EXAMINATION	54
9	COST BENEFIT ANALYSIS	57
9.1	Project costs	57
9.2	Project benefits	57
9.2.1	Flood risk reduction	57
9.2.2	Agricultural benefits	57
9.3	Reduction of flood benefits	58
9.3.1	Impact on fisheries	58
9.3.2	Other ecosystem services and goods	58
9.3.3	Water supply and sanitation	58
9.4	Economic analysis	59
10	INSTITUTIONAL DEVELOPMENT	61
10.1	Present situation	61
10.2	Development	63
10.2.1	Strategy and Policy setting	63
10.2.2	Management of infrastructure	63
10.2.3	Agricultural extension services	64
11	TERMS OF REFERENCE FEASIBILITY STUDY FOR PHASE 1	65
12	REFERENCES	67

## List of Appendices

APPENDIX 1	FLOOD HAZARD ASSESSMENT .....	69
APPENDIX 2	FLOOD DAMAGE AND FLOOD RISK ASSESSMENT .....	71
APPENDIX 3	SOCIO ECONOMICS AND AGRICULTURE .....	73
APPENDIX 4	PUBLIC PARTICIPATION PLAN .....	75
APPENDIX 5	IMPLEMENTATION PUBLIC PARTICIPATION PLAN .....	77
APPENDIX 6	INITIAL ENVIRONMENTAL EXAMINATION.....	79
APPENDIX 7	ADMINISTRATIVE LEVELS IN THE WATER SECTOR IN LAO PDR .....	81
APPENDIX 8	TERMS OF REFERENCE FEASIBILITY STUDY FOR PHASE 1 [FOLLOWS] ..	83

## List of Figures

FIGURE 1.1	LOCATION OF THE LOWER XE BANGFAI AREA IN LAO PDR .....	2
FIGURE 2.1	LOCATION OF THE LOWER XE BANGFAI AREA .....	3
FIGURE 2.2	MONTHLY RAINFALL STATISTICS OF STATION THAT PHANOM, PERIOD 1966-2005 .....	9
FIGURE 3.1	ELEVATION MAP OF XE BANGFAI BASIN .....	19
FIGURE 3.2	EXTEND OF FLOODING ALONG LOWER XE BANGFAI AND MEKONG IN YEAR 2000 .....	20
FIGURE 3.3	SCHEMATIC LAYOUT OF TRANS-BASIN DIVERSION FROM NAM THEUN TO XE BANGFAI.....	21
FIGURE 3.4	LONG SECTION OF XE BANGFAI RIVER INDICATING THE WATER LEVEL UNDER EXTREME FLOOD EVENTS, RIVERBED AND BANK ELEVATIONS.....	22
FIGURE 3.5	FLOOD DEPTH AND EXTENT LOWER XE BANGFAI, .....	25
FIGURE 3.6	FLOOD DEPTH AND EXTENT LOWER XE BANGFAI, .....	25
FIGURE 3.7	FLOOD DEPTH AND EXTENT MAP LOWER XE BANGFAI, .....	26
FIGURE 3.8	FLOOD DEPTH AND EXTENT MAP LOWER XE BANGFAI, T= 100 YEARS...	26
FIGURE 3.9	FLOOD DAMAGES FOR FLOODS WITH DIFFERENT RETURN PERIODS. ....	27
FIGURE 5.1	ALTERNATIVE 1: EMBANKMENT CONSTRUCTION IN 3 PHASES.....	32
FIGURE 5.2	ALTERNATIVE 2: ONE STEP EMBANKMENT CONSTRUCTION (RIGHT BANK) .. .....	34
FIGURE 5.3	CROSS SECTION OF DIVERSION CANAL.....	35
FIGURE 5.4	PROPOSED ALTERNATIVE LAY OUTS OF THE XELAT DIVERSION.....	35
FIGURE 5.5	PROPOSAL 2: EMBANKMENTS ON THE LEFT AND RIGHT BANK OF THE XE BANGFAI RIVER.....	36
FIGURE 5.6	COMPUTED 100-YEAR FLOOD LEVEL ALONG THE XE BANGFAI RIVER ....	38
FIGURE 5.7	DIFFERENCES IN THE COMPUTED 100-YEAR FLOOD LEVEL ALONG THE XE BANGFAI. ....	38
FIGURE 5.8	COMPUTED 100-YEAR FLOOD LEVEL ALONG THE XE BANGFAI RIVER FOR THE CASES WITH A 200 M WIDE DIVERSION CANAL AND WITHOUT DIVERSION CANAL.....	40
FIGURE 5.9	DIFFERENCES IN THE COMPUTED 100-YEAR FLOOD LEVELS ALONG THE XE BANGFAI RIVER FOR THE CASES WITH AND WITHOUT DIVERSION CANAL OF 200 M BOTTOM WIDTH. ....	40
FIGURE 5.10:	WATER LEVELS IN THE XE BANGFAI WITH DIVERSION CANAL OF VARIOUS WIDTH AND WITHOUT A DIVERSION CANAL.....	41

List of Tables

TABLE 2.1	HOUSEHOLD CHARACTERISTICS .....	4
TABLE 2.2	LAND USE.....	5
TABLE 2.3	STRUCTURES, NONGBOK DISTRICT.....	6
TABLE 2.4	HOUSING AREA & VALUE, NONGBOK DISTRICT.....	7
TABLE 2.5	ECONOMIC ACTIVITIES, NONGBOK DISTRICT .....	7
TABLE 2.6	AGRICULTURAL LAND USE, 2009.....	11
TABLE 2.7	NET BENEFIT OF SELECTED CROPS .....	14
TABLE 2.8	PROPORTION OF FISH CATCH AT DIFFERENT LOCATIONS.....	16
TABLE 3.1	DAMAGES FOR HOUSING, AGRICULTURE AND INFRASTRUCTURE/ RELIEF (US\$ MLN) .....	27
TABLE 3.2	ANNUAL RISK, NONGBOK DISTRICT (US\$ MLN PER YEAR) .....	28
TABLE 5.1	SUMMARY OF WORKS AND PROTECTION PROVIDED .....	33
TABLE 5.2	ESTIMATION COST FOR CONSTRUCTION (US\$) .....	34
TABLE 5.3	POSSIBLE FARMING CALENDAR FOR THE LOWER XE BANGFAI AREA .....	44
TABLE 5.4	FUTURE AGRICULTURAL LAND USE .....	46
TABLE 5.5	COST ESTIMATES FOR WORKS, WITHOUT AND WITH DIVERSION CANAL OPTIONS.....	48
TABLE 9.1	COST ESTIMATES FOR WORKS, WITHOUT AND WITH DIVERSION CANAL OPTIONS.....	57
TABLE 9.2	FLOOD RISK IN NONGBOK DISTRICT AND TOTAL RISK IN THE WHOLE FLOOD PRONE AREA .....	57
TABLE 9.3	CATEGORIES OF ECOSYSTEM SERVICES AND GOODS .....	58
TABLE 10.1	LAO PDR-INSTITUTIONAL TASKS, RESPONSIBILITIES, ACTIVITIES, MANDATE-.....	61

## ABBREVIATIONS AND ACRONYMS

<b>ADB</b>	Asian Development Bank
<b>amsl</b>	Above mean sea level
<b>BDP</b>	Basin Development Plan Programme
<b>DEM</b>	Digital Elevation Model
<b>DSF</b>	Decision Support Framework
<b>DTM</b>	Digital Terrain Model
<b>DWR</b>	Department of Water Resources in Thailand
<b>EIA</b>	Environmental Impact Assessment
<b>FMM</b>	Flood Management and Mitigation
<b>FFMP</b>	Flood Management and Mitigation Programme
<b>FMMP-C1</b>	Component 1 of the MRC FMMP: Flood Warning and Preparedness
<b>FMMP-C2</b>	Component 2 of the MRC FMMP: Structural Measures and Flood Proofing
<b>FMMP-C3</b>	Component 3 of MRC FMMP: Mediation of Trans-boundary Flood Issues
<b>FMMP-C4</b>	Component 4 of the MRC FMMP: Flood Emergency Management Strengthening
<b>FMMP-C5</b>	Component 5 of the MRC FMMP: Land Management
<b>FRM</b>	Flood Risk Management
<b>GEV</b>	Generalised Extreme value
<b>GIS</b>	Geographic Information System
<b>IFRM</b>	Integrated Flood Risk Management
<b>IKMP</b>	Information and Knowledge Management Programme of the MRC
<b>IWRM</b>	Integrated Water Resources Management
<b>KOICA</b>	Korea International Cooperation Agency
<b>LMB</b>	Lower Mekong Basin
<b>MRC</b>	Mekong River Commission
<b>MRCS</b>	Mekong River Commission Secretariat
<b>NGO</b>	Non Government Organisation
<b>NMC</b>	National Mekong Committee
<b>POR</b>	Plain of Reed
<b>PR</b>	Provincial Road
<b>ProDIP</b>	Project Development and Implementation Plan
<b>RNE</b>	Royal Netherlands Embassy
<b>TCEV</b>	Two Component Extreme Value
<b>TOR</b>	Terms of Reference
<b>WUP</b>	Water Utilization Programme of MRC
<b>WUP-A</b>	WUP Basin Modelling and Knowledge Base Project
<b>WWF</b>	World Wildlife Fund
<b>1D / 2D / 3D</b>	One Dimensional / Two Dimensional / Three Dimensional

## IFRM GLOSSARY

<b>Damage curve</b>	The functional relation between inundation characteristics (depth, duration, flow velocity) and damage for a certain category of elements at risk.
<b>Direct damage</b>	All harm which relates to the immediate physical contact of flood water to people, property and the environment. This includes, for example, damage to buildings, economic assets, loss of standing crops and livestock, loss of human life, immediate health impacts and loss of ecological goods.
<b>Exposure</b>	The people, assets and activities that are threatened by a flood hazard.
<b>Flood control</b>	A structural intervention to reduce the flood hazard.
<b>Flood damage</b>	Damage to people, property and the environment caused by a flood. This damage refers to direct as well as indirect damage.
<b>Flood damage risk (= Flood risk)</b>	The combination or product of the probability of the flood hazard and the possible damage that it may cause. This risk can also be expressed as the <i>average annual possible damage</i> .
<b>Flood hazard</b>	A flood that <i>potentially may</i> result in damage. A hazard does not necessarily lead to damage.
<b>Flood hazard map</b>	Map with the predicted or documented extent / depth / velocity of flooding with an indication of the flood probability.
<b>Flood proofing</b>	A process for preventing or reducing flood damages to infrastructural works, buildings and/or the contents of buildings located in flood hazard areas.
<b>Flood management risk</b>	Comprehensive activity involving risk analysis, and identification and implementation of risk mitigation measures.
<b>Flood management measures risk</b>	Actions that are taken to reduce the probability of flooding or the possible damages due to flooding or both.
<b>Flood risk map</b>	Map with the predicted extent of different levels / classes of <i>average annual possible damage</i> .
<b>Hydrological hazard</b>	A hydrological event (discharge) that may result in flooding.
<b>Indirect damage</b>	All damage which relate to the disruption of economic activity and services due to flooding.
<b>Integrated flood risk management</b>	The approach to Flood Risk Management that embraces the full chain of a meteorological hazard leading to flood damages and considers combinations of structural and non

structural solutions to reduce that damage.

**Meteorological hazard** A meteorological event (storm) that may result in a hydrological hazard and, eventually, in flooding

**Resilience** The ability of a system / community / society to cope with the damaging effect of floods

**Susceptibility** The opposite of resilience, that is to say the **inability** of a system / community / society to cope with the damaging effect of floods

**Vulnerability** The potential damage that flooding may cause to people, property and the environment





1

## INTRODUCTION

### 1.1 Background of the Demonstration Project

The immediate objectives of the *Flood Management and Mitigation Programme, Component 2: Structural Measures and Flood Proofing (FMMP-C2)*, have been formulated as follows:

- to reduce the vulnerability of people living in the LMB to the negative impacts of floods and
- to establish sustainable flood risk management capacity in the MRC, MRCS, NMC's and national line agencies.

The project has consequently a “learning by doing” character in which the preparation of concrete measures aiming at the reduction of people’s suffering goes together with building capacity and preparing guidelines for sustainable flood risk management in the region. The dual project objective requires that in the preparation of the concrete measures all steps are followed that are crucial for a socio-economic and environmentally sound flood risk management. All these steps need to be well documented in support of the capacity building and the preparation of guidelines.

Integrated Flood Risk Management (IFRM) is defined here as applying the most attractive mix of all possible measures, hard and soft, for the reduction of flood damage risk. The first step in the process to come to this most attractive package of measures is the proper assessment of flood risk. Secondly, possible measures for risk reduction are to be identified. The third step involves the evaluation of the effects and impacts of the different types of measures and to develop a strategy for flood risk management. These strategies will be developed at the level of the Sub-areas as defined under the MRC Basin Development Plan programme. In a fourth step, IFRM plans are to be developed on the basis of these strategies. Such plans include a specific set of measures and projects for the reduction of flood damage risk in a certain area. In the fifth step these measures and projects are prepared for implementation.

During Stage 1 of the *Flood Management and Mitigation Programme, Component 2: Structural Measures and Flood Proofing (FMMP-C2)*, five Demonstration Projects had been formulated to i) demonstrate the application of Best Practice Guidelines that are being developed under FMMP-C2, and ii) to prepare bankable project proposals [1]. The preparation of an Integrated Flood Risk Management Plan for the Lower Xe Bangfai area in the Lao PDR is one of the selected demonstration projects (see Figure 1.1).

During Stage 1 of the FMMP-C2, a report was prepared on the Potential Development in the Xe Bangfai area with the aim to investigate options for flood risk reduction and agricultural development. The options were based on plans that have been under preparation by the provincial authorities. Options consisted of flood protection embankments on the right bank of the river, on both sides of the river, and a diversion canal. Also a storage reservoir was considered for irrigation purposes. The alternatives developed constitute large scale structural measures for flood risk reduction.

In Stage 2 of FMMP-C2, the preparation of an Integrated Flood Risk Management Plan for the Lower Xe Bangfai, took the earlier plans as a starting point and investigated the options further. The following main activities were implemented for the preparation of the IFRM Plan:

- Flood hazard assessment;
- Flood damage assessment;
- Flood risk assessment;
- Public participation planning;

- Stakeholder consultation;
- Initial environment examination;
- Agricultural development opportunities, and
- Economic analysis

This report was prepared to have a comprehensive understanding of all the relevant aspects of the IFRM plan



**Figure 1.1** Location of the Lower Xe Bangfai area in Lao PDR

As IWRM is based on a collective vision and collective actions, this report was prepared to guide the technical development of the area in order to meet the collective vision of the local population. The latter is crucial to secure their willingness to further participate in the development of structural measures, as well as in the construction and the management of systems at a later stage.

## **1.2 Contents of the report**

Chapter 2 describes the main characteristics of the Lower Xe Bangfai area. Chapter 3 describes the impact of floods and flooding. Strategic directions for flood risk management are discussed in Chapter 4. The Lower Xe Bangfai project for integrated flood risk management is elaborated in Chapter 5. The public participation in the project preparation is discussed in Chapter 6. The social impact of the project proposal is discussed in Chapter 7. The outcome of an initial environmental examination is presented in Chapter 8. Chapter 9 presents a cost benefit analysis. Chapter 10 discusses the required institutional development.

## 2 PROJECT AREA

### 2.1 Location

The Xe Bangfai River originates in Boualapha District, before flowing into Mahaxai District. The river then flows through Xe Bangfai District before entering the Lower Xe Bangfai floodplains in which it forms the southern border of Nongbok District, Khammouane Province, and the northern border of Xaybouli District, Savannakhet Province. It ends in the Mekong River.

The Lower Xe Bangfai area is located in the MRC Basin Development Plan (BDP) Sub-area 4L (see Figure 1.1).

The project area comprises the flood-prone areas located along the Lower Xe Bangfai River, downstream of the crossing with the National Road Nr 13. To the west the area is bounded by the Mekong River and is part of the Khammouane province. To the east, in the Savannakhet Province, the Road nr 13 forms the upstream boundary of the area.

The area covers the whole area of Nongbok district and some villages of the Xe Bangfai district on the right bank of the river and part of the Xaybouli District on the left bank of the river (see Figure 2.1).



Figure 2.1 Location of the Lower Xe Bangfai area

Due to limited resources and available time, only part of the project area could be analysed, this is the Nongbok district, on the right bank of the Xe Bangfai.

### 2.2 Population and living situation

#### 2.2.1 Population

According to the Nongbok District statistics, the population in 2006 was about 41,000 people with 7,600 households. Average household size was 5.41 persons and the average annual population growth rate during the period of 2001-2006 was 0.49%.

Sex distribution was as 49% for male and 51% for female in almost all age groups except group more than 65 years old.

Ethnicity in Nongbok district is mainly Lao (71%) and it is followed by Phouthyai (25%), Mangkong (3%) and King (1%). Most of household are headed by male occupying 95% of the total families in the district.

The communities are culturally and linguistically homogenous. This contributes to effective social and community networks that are important assets for the collective actions around flood planning and management.

Households in Nongbok have, on average, 5.4 persons (see Table 2.1). The majority (95%) are headed by men who slightly outnumber women in the district population. However, more than one-third of the population (35%) is under the age of 15 years. This high proportion of children in combination with elderly people living in the district results in an age dependency ratio of 0.71. This means that every working-age person in the district must produce enough to support his or her own needs plus 70% of the needs of another, dependent person.

The implications for social vulnerability include:

The large proportion of children in Nongbok tends to increase vulnerability to the impacts of flooding. Children are often at risk of physical injury and drowning during floods. They may be more susceptible to becoming sick, for instance, if there is no safe drinking water or proper sanitation during floods. If flooding damages schools, children's education will be disrupted. Moreover, the high dependency ratio places extra burdens on parents and other adults to provide for children's needs for food, shelter, etc.

**Table 2.1 Household Characteristics**

<b>Household Characteristics Xe Bangfai Focal Area, Lao PDR</b>			
<i>Indicator</i>		<i>Unit</i>	<i>District</i>
HH size (aver.)		Pers.	5.4
HH head	Male	%	95.0
	Female	%	5.0
Male/female ratio		ratio	1.02
Children < 15 years		%	35.5
Dependency ratio		ratio	0.71
<i>Source: District Flood Vulnerability Database, Lao PDR</i>			

### 2.2.2 Land use and tenure

Almost the entire territory of Nongbok district is land that contributes to the rural livelihoods of people living in the district. Cultivated land encompasses more than 45% of the district area and includes irrigated paddy (7%), rain fed paddy (34%) and other land such as upland crops land and residential gardens (6-7%) (See Table 2.2). In addition, people rely on riverbanks, wetlands and forests to grow and/or harvest food crops, as well as for other productive uses such as building materials, medicines, etc.; together, these resources account for nearly 40% of the district area.

**Table 2.2 Land use**

<i>Indicator</i>	<i>Unit</i>	<i>District</i>	<i>Unit</i>	<i>District</i>
District area	%	100	ha	31,300
Rice land – rain fed	%	33.7	ha	10,548
Rice land – irrigated (originally)	%	7.3	ha	2,285
Upland crop land	%	5.5	ha	1,722
Plantation land	%	0.3	ha	94
Rural residential (gardens)	%	1.6	ha	501
Urban land	%	0.4	ha	125
Lakes, ponds & wetlands	%	8.7	ha	2,723
Forest - dry Dipterocarpus	%	30.0	ha	9,390
Forest - non-productive	%	11.3	ha	3,537
Communal	%	1.2	ha	376
<i>Source: District Flood Vulnerability Database, Lao PDR</i>				

Legal title to agricultural land in Lao PDR generally takes the form of a land certificate issued by local authorities. In Nongbok district, the ratio of land certificates to households is 0.95, meaning that nearly all households have secure tenure to their productive land. Landless households account for 1.7% of all people in the district. All households in the district also have a land certificate for their residential land. The issues of social vulnerability to the impacts of flooding include:

- (i) The reliance of livelihoods on land and natural resources increases the direct and indirect costs of flooding. Household expenditures for food and other basic needs will increase if people are unable to cultivate vegetables in riverbank gardens or harvest forest or wetlands products they normally use for different purposes.
- (ii) Secure land tenure as well as house ownership (see section below) provide households with collateral that will facilitate their ability to obtain loans and other assistance to rehabilitate property damaged during a flood or to meet other households needs (health care, new agricultural inputs, etc.). This is an important and positive point with regard to future development in a flood secure area, because it will allow access to micro-credit.
- (iii) People without productive land are at risk during a flood because, in most instances, they work as agricultural labour on other people's land. They lose this source of income if land is inundated for extended periods and/or the rice crop is damaged or destroyed. As they are generally poor, they have few alternative resources to meet basic or flood-induced needs (e.g., health care). In Nongbok, the needs of the small number of landless people may be effectively met through the strong family and social networks that exist.

### 2.2.3 Housing and other structures

Residential and separate commercial structures account for, respectively, 88% and 11% of the main structures in the district; however, many business activities are accommodated in spaces that are attached directly to residential structures. These types of structures are generally owned by their occupants. Industrial and institutional structures make up about 1% of the total (see Table 2.3).

**Table 2.3 Structures, Nongbok District**

<i>Indicator</i>	<i>Unit</i>	<i>District</i>
Main structures – total	No.	9,030
Residential - % total	%	88.4
<i>Permanent</i>	%	20.0
<i>Semi-permanent</i>	%	70.0
<i>Temporary</i>	%	10.0
<i>HH owns structure</i>	%	100.0
Commercial - % total	%	10.6
<i>Permanent</i>	%	20.6
<i>Semi-permanent</i>	%	79.4
<i>HH/business owns structure</i>	%	100.0
Industrial - % total	%	0.2
<i>Semi-permanent</i>	%	100.0
Institution - % total	%	0.9
<i>Permanent</i>	%	40.5
<i>Temporary</i>	%	59.5

*Source: District Flood Vulnerability Database, Lao PDR*

Permanent structures made from brick and/or concrete account for 20% of these structures; 70% are semi-permanent construction, generally wood; and, the remainder are constructed of thatch, bamboo and other materials. Based on data provided by surveyed households, permanent and semi-permanent house structures tend to have similar areas and value (see Table 2.4)

Flood risks are a major factor in the location and design of housing in the focal area. In raised safe areas, people will construct one-story brick houses. However, in most areas, the traditional coping mechanisms include:

- (i) Houses are raised 2.5-3 m on concrete poles to protect them against annual floods. The concrete poles have replaced wood poles that were traditionally used as they are more resistant to water logging.
- (ii) Retail shops, repair garages/workshops and other commercial structures are generally not raised. However, the foundation will be made stronger to withstand potential damage from flood waters.
- (iii) Within commercial structures, people frequently make provisions for temporary storage of inventory and equipment above the normal flood level that may occur within the structure. For commercial activities located in structures adjacent or attached to houses, the inventory and equipment will often be moved and stored within the raised house.
- (iv) Other industries such as rice mills will often be located on higher ground within the community to provide protection during floods.

**Table 2.4 Housing Area & Value, Nongbok District**

		% HH	Area	Value
			m <sup>2</sup>	Kip mln
Average			67	40.1
By house type	Permanent	84.3	66	39.8
	Semi-permanent	15.7	70	42.2

*Source: Household surveys, Lao PDR*

There are also numerous small agricultural structures such as rice huts and animal shelters (the number is nearly equal to the number of main structures). These are all temporary structures.

In terms of household assets, people in Nongbok rely on motorbikes as their principal means of transport; less than 1% of district households own a car or truck. Although the district is bounded by the Xe Bangfai and Mekong rivers, only 2% of households own small boats (without motors); an even smaller proportion (0.5%) own larger, motorized boats. More than a third of households own a hand tractor, but very few if any households own other types of productive equipment such as mechanized tractors, water pumps, diesel generators, rice mills.

The implications for assessing the vulnerability of households to flood damages are as follows:

- (i) The traditional house form reduces the risks of flood damages to people's housing. In most years in Nongbok, there are no flood-affected houses; even in the serious floods in 2001 and 2005, there were only 2-3 damaged houses.
- (ii) The establishment of safe areas and/or the selection of locations of non-residential structures on higher ground help to minimize flood damages.
- (iii) However, the low proportion of households that own small or larger boats will be reflected in the lack of access that many people have during floods to health care and other services outside their immediate village. The lack of boats may also constrain local emergency response activities.

#### 2.2.4 Economic activities

Main occupation in the district is in agricultural production, fishery and working as hired labour in agriculture (68% of the population). 25% of the population works as hired labour in Thailand, particularly in factories (see Table 2.5). Very few people do business, trading or offer services. This indicates that the population is directly depending on its immediate environment.

**Table 2.5 Economic activities, Nongbok District**

<i>Indicator</i>	<i>Unit</i>	<i>District</i>
Number of persons 18-60 yrs.	No.	24,098
Agriculture	%	63.5
Fishery	%	1.5
Agricultural labour	%	3.7
Construction labour	%	0.9
Other labour – Thailand	%	24.9
Business owner	%	1.9
Employee – private sector	%	0.8
Employee – government	%	2.8

*Source: District Flood Vulnerability Database, Lao PDR*

- (i) Vulnerability to economic losses due to flooding is directly related to the proportion of people engaged in agricultural activities.
- (ii) The incidence of working people who migrate to Thailand reflects better job prospects and wages that are available to people living in Nongbok, as well as possible constraints on economic activities in the district (e.g., lack of agricultural land, non-farm employment). The higher wages contribute to the low poverty levels in the district. At the same time, however, the absence of younger family members during a flood event may increase household vulnerability. In addition, a greater burden is placed on women when adult men are absent from the household.

#### 2.2.5 Access to electricity, water and sanitation

Only about 1,000 households in the district (14%) are actually connected to piped water in the district town, most families take water from a well and/or the river. During floods people rely on rainwater, or purchased water for washing and bathing.

There is no wastewater collection or treatment system in the district. There are 52% of total households having their own toilet/latrines, in most instances water-sealed. The remaining households have no facilities.

There is a high rate of households connected to national power grid (95%).

The implications for the assessment of social vulnerability to flooding include the following:

- (i) Due to inadequate supplies of safe drinking water and, particularly, poor sanitation conditions (defecation in the open and in paddy fields), there is a high risk of diarrhoea and dysentery.
- (ii) Bathing and washing clothes in flood waters increases the incidence of skin rashes and infections due to contamination of the water.

#### 2.2.6 Access to health care

Floods in Nongbok are associated with a variety of health problems: diarrhoea and dysentery; malaria and dengue fever; colds; and, skin and eye infections.

In Nongbok district, the health care facilities include: 1 district hospital with 15 beds, 2 clinics and 10 dispensaries. The 2 clinics provide services for the 72 villages in the district, with a ratio of 3,797 households per clinic. There is one dispensary for each village cluster, or a district-wide ratio of 759 households per dispensary. Due to the lack of adequate medical facilities and the difficulties of travel during the flood season, many households rely on traditional herbal medicines to treat diarrhoea, dysentery and the various types of skin and eye infections. The implications for social vulnerability due to flooding include:

- (i) The inadequate (and often ill-equipped) health care facilities are a major source of people's vulnerability when they are injured and/or become ill during or following the flood.
- (ii) Due to the lack of adequate health care and/or the need to travel to obtain health care, there is a higher risk of extraordinary health care costs that strain the resources of households, particularly poor households.



## 2.3 Climate and meteorology

The rainy season in the area has duration of five months (May-September) and provides for 87% of total annual rainfall. The dry season lasts seven month (October-April); especially there is almost no rain in November-January (See Figure 2.2).

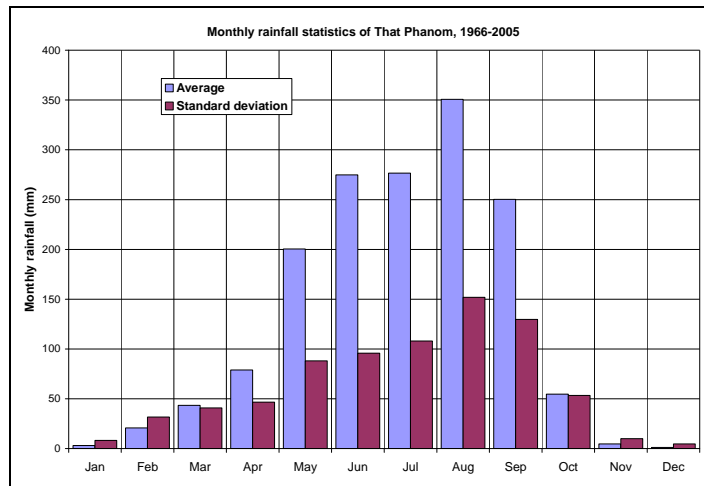


Figure 2.2 Monthly rainfall statistics of station That Phanom, Period 1966-2005

## 2.4 Infrastructure

### 2.4.1 Roads

The road network in the project area is fairly dense with Road number 13, connecting Thakhek with Savannakhet forming the eastern boundary of the project area. Most villages in the Nongbok District are accessible by road, both in the rainy and in the dry season. There are 81 roads with a total length of 287 km in the district. Of these roads, 71 (273 km) can be used in both seasons. There are five bridges in the district.

### 2.4.2 Flood management infrastructure

Flood protection of the area is still very limited and mainly consists of low level embankments on parts of the right and left banks of the river and partly along the Mekong. Most of the natural drains that connect to the Xe Bangfai have been equipped with gates, in total there are nine gate structures in Savannakhet and eleven in Khammouane. The gates are in urgent need of rehabilitation. Out of the 20 gates, 15 will be rehabilitated by the NTPC.

## 2.5 Navigation

The navigation on the Xe Bangfai is inconvenient, only small volumes can be transported within fifty kilometres from the confluence with the Mekong River. In the wet season, the river is navigable for ships with a capacity up to 5 tonne, in the dry season the capacity of the ships is limited to 0.2 tonne.

Villagers report that their use of the Xe Bangfai River for transportation during the dry season is less than in the past, and there are only a few regular passenger boat services operating in the lower section of the river.

The discharge of the Nam Theun 2 hydropower station to the Xe Bangfai basin will favourably contribute to navigation since the water level will increase.

## **2.6 Agriculture**

Rice cropping and vegetables growing are the main agricultural activities in the project area. Agriculture is the area's largest sector of employment. Vegetables and other crops are grown by residents on the somewhat elevated Xe Bangfai river banks, as well as in the flood plains around natural lakes as water recedes. Lowland wet rice is cultivated in the lower lying areas.

Nongbok district has 10,535 ha of wet season rice of which is 50% for staple rice and the remainder for commercial rice. The dry season rice was only 1,880 ha under irrigation and 1,230 ha of non-rice crops on river bank slopes cultivated after rainy season using residual soil moisture and flood recession. The existing cropping intensity was 97%. There would be a potential for irrigation development in the area to increase cropped area in dry season.

In Xayboully district, where irrigation exists, wet season rice was 8,617 ha and dry irrigated rice was 8,520 ha. Beside rice cultivation in a low land, there was 2,884 ha sugarcane on a highland, where flooding has no impact. The cropping intensity in the area was 165%. There would be no room for new irrigation development in the area except improving and/or modernizing existing irrigation schemes. Table 2.6 presents an overview of the present land use. Appendix 3 presents a study on socio-economics and agriculture.

**Table 2.6 Agricultural land use, 2009**

Items	Nongbok	Xaybouly
<b>Gross area</b>	<b>31,300</b>	<b>NA</b>
<b>Non-agricultural land</b>	<b>17,150</b>	<b>NA</b>
<b>Agricultural land</b>	<b>14,150</b>	<b>14,500</b>
<b>Cultivated crop area</b>	<b>13,794</b>	<b>23,934</b>
<b>Cropping intensity</b>	<b>97%</b>	<b>165%</b>
<b>I Wet season cultivated land</b>	<b>10,684</b>	<b>11,772</b>
<b>A. Cultivated rice</b>	<b>10,535</b>	<b>8,617</b>
1. Staple Rice	5,268	8,617
2. Commercial rice	5,267	-
<b>B. Cultivated non-rice</b>	<b>149</b>	<b>3,155</b>
1. Chilly	-	9
2. Sweet corn	149	80
3. Sugarcane	-	2,884
4. Other crops	-	182
<b>II Dry season cultivated land</b>	<b>3,110</b>	<b>12,162</b>
<b>A. Cultivated rice</b>	<b>1,880</b>	<b>8,520</b>
1. Staple Rice	-	-
2. Commercial rice	1,880	8,520
<b>B. Cultivated non-rice</b>	<b>1,230</b>	<b>3,642</b>
1. Tobacco	35	112
2. Chilly	170	63
3. Sweet corn	53	94
4. Sugarcane	-	2,884
5. Other crops	746	489

Source: FMMP\_C2: Secondary data collection, April-June 2009

### 2.6.1 Rice cropping

The Xe Bangfai plain is one of the four main rice production areas in central Lao. Success or failure of lowland rice is closely link to the natural flood cycle and every year part of the crop is damaged by the flood. In the project area, there are two main types of rice production: rain-fed lowland (wet season from June till November) rice and irrigated lowland (dry season from December to April) rice.

The rainy season in the area maintains a duration of five months (May-September) occupying 87% of total annual rainfall. It plays an important role in wet season crop cultivation as cultivated area and cropping calendar. The dry season lasts seven month (October-April); especially there is almost no rain in November-January (see section 2.2).

#### **Wet season rice**

The rain-fed rice requires sometimes supplemental irrigation water by a diversity of small-scale irrigation systems. In the wet season 10,535 ha are cropped with a yield of 4.3 t/ha.

Rice is the staple food for all households. More than half of the rice production is required to meet basic household consumption needs. However, sale of surplus rice in Thai markets is an important source of income for households in this district.

In years of heavy flooding, such as occurred in the rainy season of 2000, a large proportion of the cultivated area was damaged. Farmers report that rice production is

very sensitive with flooding in the region (slightly higher or of longer duration than normal can make the difference between having a large or small harvest).

### **Dry season rice**

In dry season, the cultivated area is only 1,880 ha. It is irrigated by several small irrigation schemes. The average yield is 6.2 t/ha for that period, much higher than in the wet season. Ideally the dry season paddy should provide supplementary rice to farmers, both for consumption and for sale on the local markets. However, the dry season cropping has not been as successful as envisaged. Most villagers see dry season rice cultivation as a potential supplement — not as a replacement — to the main rice crop grown during the rainy season.

The expansion of pump-based irrigation, and the economic rationale for this expansion, is increasingly problematic and questionable. This is partly due to:

- (i) High water conveyance losses of the canal system.
- (ii) Loss of value of the Lao currency, the kip, making imports of fuel and chemical fertilizer more expensive.
- (iii) High price of electricity.

The market price for rice, however, remains relatively low. Installed about 10 years ago, all of the diesel-powered pumps along the Xe Bangfai River are not in operation, most having been used for a single season. The economics for the electric pumps are better but still marginal at best. Farmers are being told to repay the costs of these government-provided irrigation systems. This added expense is contributing to disillusionment and frustration felt by many farmers regarding dry season rice cultivation. This negative experience works against the setting-up of any collective action for flood management and development of the area in partnership with government representatives

Farmers have also encountered other major problems with dry season rice farming including pest infestation. Continued use of the electrical pumps appears to be dependent on large government subsidies and the strong encouragement of district officials. While local officials continue to report an expansion of the area of dry season rice farming, villagers report that in fact it is declining.

Even though the cash generation of dry season rice appears to be higher than the wet season rice, the farmers don't find it attractive to crop. The inputs appear to be much higher. The benefit is related to the input-output market prices. All in this results in a higher risk taking. The problem farmers might encounter could be the cash-flow for this more risky venture. This ought to be confirmed by more detailed investigations.

Although food security appears not to be an issue in the area, the Government has embarked on a major programme of irrigation development along the Xe Bangfai; most villages along the Xe Bangfai now have irrigation pumps. Originally there were 9 gated-sluiques and 25 pumping stations in the district serving the command area of 1,750 ha.

The water to be discharged by the Nam Theung-2 dam provides an opportunity for increasing agricultural production during the dry season. A number of large irrigation schemes have been made and are being planned for the Xe Bangfai area, but recent experiences are reason for caution.

### **2.6.2 River bank vegetables**

Cultivation of vegetables is done mainly by women, and it is an important activity which provides food and income to the families. About 25% of villagers are involved in

riverbank gardening in the Nongbok and Xaibouly Districts in the lower Xe Bangfai region. The average size of riverside crop fields is 0.15 ha/household.

Vegetables are grown in 2 periods: September-December and December-February. The first crops are onion, yam, water melon, long bean, cucumber etc. These are grown in the moist fertile soil on the river banks and tributary banks.

The second vegetables are planted down the river bank as water recedes further. They are of shorter duration and must be harvested by February-March. Main crops are lettuce, garlic, chilly and eggplants.

### 2.6.3 Upland crops

Other upland crops and fruit trees represent a small proportion of agricultural activities in the district. Crops such as tobacco, corn and beans are grown where rice cannot be grown. According to 2009 statistics, there were 149 ha of corn cultivated in wet season and total 1,230 ha of non-rice crops cultivated in dry season. See Table 2.6

Part of the production is sold on local markets and tobacco forms the largest single source of cash income. Tobacco is sold not only on the provincial markets, but also in Vientiane and across the border in Thailand. The choice and volume of these crops is determined by market demands in Lao PDR and in Thailand.

### 2.6.4 Use of agrochemicals and fertilizers

In 2003, the FAO conducted a case study on pesticide use in Lao. The study found that pesticide use is relatively low compared to other countries of the region, and that active promotion of pesticides is not widespread. However, the study also found that pesticides are widely available, and that most of those for sale are highly toxic. Folidol, a class 1a pesticide, was found to be the most widely available and used pesticide, even though it is officially banned. It was also reported that a clear trend toward increasing use of pesticides is noted, particularly by farmers producing for urban markets. Although these farmers are aware of the dangers, they repeatedly stated that they know of no other way to meet the demands of the market, consumers and middlemen, other than to use more pesticides. The study concluded that merely not promoting pesticides is not enough, and that more concerted policies, strategies, and action are urgently needed.

In general, pest attack on rice crops is low in Lao PDR. Although there is a range of pests mentioned both by farmers, officials and in the literature, these are rarely of economic importance. Consequently pesticide use per unit area of rice is low. A recent survey indicated that in Savannakhet Province 50% of farmers sprayed rice one or more times per year, with 25% sprayed once and 25% sprayed more than once. In general pesticide use is higher in irrigated areas, partly to protect the extra investment in the dry season irrigated crop, but partly because double cropping leads to an increase in the number and intensity of pests attacking the crop. Rice diseases are rarely treated with chemicals (e.g. fungicides); weed control with herbicides is also very rare.

Pesticide use for vegetable growing is believed to be significant. The number of treatments applied is apparently not excessive, but every farmer treats his vegetables with insecticides. There has been no analysis of pesticide residues in fresh produce in Lao PDR, since there are no laboratory facilities for this.

Inorganic fertilizers are used predominately on the dry season rice crop, but increasingly also in the wet season. The type of usage varies according to the recommendations of

extension workers and local availability. Farmers mentioned using an NPK 16-20-0 compound fertilizer to “prime” the land at around 200 – 350 kg/ha followed by Urea 46-0-0 at around 50 kg/ha. These fertilizers contain no K, making the rice susceptible to diseases such as brown spot disease in K deficient conditions. Farmers and officials in the Xe Bangfai plain indicated that inorganic fertilizer use appears to follow no particular guidelines with respect to soil analyses or the analysis and usefulness of organic fertilizer. Some inorganic compound fertilizers appear to be used on the basis of availability from donors rather than on need. In the Xe Bangfai plain organic fertilizer, mainly manure, is used in combination with inorganic fertilizer at around 250 kg/ha; a relative low rate, but beneficial if applied annually.

### 2.6.5 Crop benefits

Representative crop-budgets for the project area were collected in April-June 2009 under framework of the FMMP\_C2 activities. The standard crop-budget forms were developed and the Lao Consulting Groups carried out the data collection at the field.

Economic benefits of crops were derived from financial benefit by applying conversion factors<sup>4</sup> (CF) to remove transfer-payments (taxes, tariffs, and loan interest). The CF was 70% for unskilled labour, 80% for fertilizers, 200% for electricity tariff<sup>5</sup> applied for agriculture and irrigation; and 90% for other cost items as seed, mechanical equipments. For a rain-fed crops, high economic net benefit was found in commercial rice (690 US\$/ha) and it is followed by wet season cotton (407 US\$/ha), wet staple rice and sugarcane (383-384 US\$/ha).

For irrigated crops, high economic net benefit was found in commercial rice (936 US\$/ha). It is followed by sugarcane (599 US\$/ha), corn (522 US\$/ha), and staple rice (504 US\$/ha). They are summarized in Table 2.7 and details are in Appendix 3.

**Table 2.7 Net benefit of selected crops**

No	Crops	Production (kg/ha)	Revenue US\$/ha	Total Inputs US\$/ha	Physical input US\$/ha	Financial NB US\$/ha	Economic NB US\$/ha
1	Wet Rice	4,300	759	516	223	243	384
2	Dry Rice (irrigated)	6,200	1,094	721	416	373	504
3	Wet Cotton	1,500	618	280	178	338	407
4	Dry Cotton	800	329	178	112	151	192
5	Wet Commercial rice	4,500	1,059	509	217	550	690
6	Dry commercial rice irrigated)	6,500	1,529	726	421	803	936
7	Rain-fed Sugarcane	45,000	794	546	340	248	383
8	Irrigated Sugarcane	65,000	1,147	647	434	500	599
9	Irrigated Corn	8,000	941	525	321	416	522
10	Rain-fed Corn	5,000	588	475	273	113	238

Source: FMMP\_C2: Survey data, April-June 2009

## 2.7 Fisheries

Next to rice cropping, fisheries is one of the most important livelihood activities in the Xe Bangfai basin, and many villagers devote much of their time and energy to fishing.

<sup>4</sup> ADB Bac Hung Hai irrigation improvement project, Vietnam. Royal Haskoning 2009 and consultant estimates.

<sup>5</sup> Electricity tariff for irrigation and agriculture was 295 Kip/kWh which is about half of average tariff applied for Industry and Government office.

Fishing activities in the mainstream Xe Bangfai River are most prevalent in the dry season, while people generally fish in wetlands, streams and inundated rice fields during the rainy season.

There is a wide variety of fishing methods and fishing gears utilized by villagers in the Xe Bangfai basin including nylon monofilament gill nets, spears, hook and line, cast nets, scoop nets and many types of trap, but also explosives and, poisonous plants. Drift and gillnets are the most important gear in terms of the size of fish landings made by fisherman from the Xe Bangfai.

Seasonal fish migrations between the Mekong and Xe Bangfai rivers, and through the Xe Bangfai River and its tributaries, are an important characteristic of the river basin and are essential to the fisheries and livelihood security of the communities living in the Xe Bangfai basin. The first major fish migration of the year commences at the beginning of the monsoon season. When the rains begin in May or early June, seasonal streams begin flowing, and the water level and flow volume of the Xe Bangfai River begin to rise. At that time, according to villagers, a large number of fish species begin migrating up the Xe Bangfai River from the Mekong River, while other fish species are believed to move from deep-water pools in the Xe Bangfai River. At around the same time that fish move up the Xe Bangfai River, they also begin to migrate up its larger tributaries.

After the fish migrations at the beginning of the rainy season have taken place, there is considerable fishing activity in wetlands for the duration of the rainy season, and no important fisheries in the large rivers during this time of the year. In October, as the rainy season ends, an important fishery based on migrating fishes of the cyprinid family takes place.

When the water recedes, many villagers make barrier traps (tone) at the edges of rice fields and on streams to catch fish, and in some cases large quantities of fish are caught. Fishing in ox bow lakes, natural depressions and streams is extremely important for people living in the Xe Bangfai basin, particularly for those communities situated away from the Xe Bangfai River and other major rivers as it is only during this period that many of these fish can be caught in locations away from the major rivers.

Ethnic Lao villagers have a number of traditional practices for catching fish including the trapping of wild fish in ponds when flood waters recede (nong sa) and communal taking of fish in wetland areas (pha nong). These systems are dependent on the seasonal flood cycle of the Xe Bangfai river system.

Wild capture fisheries are clearly one of the most important livelihood resources in the Xe Bangfai basin. While fisheries have always been important to local people, their relative importance to society may actually be increasing. In areas where rice production does not provide families with a supply of rice sufficient for an entire year, wild capture are their main means for getting rice — either through direct barter trade with other villages or through selling fish and using the money to buy rice.

After rice, fish is the most important item on the diet for all ethnic groups in the area. Fish are a significant component of the local economy. Fish traders from Khoua Xe (the trading centre at the Route 13 Bridge crossing the Xe Bangfai River) and other population centres travel to riverside villages to buy fish on a regular basis; some villages selling tens of kilograms or more per day. In some areas, villagers sell their own fish at district centres. Marketing patterns differ from place to place. The sale of fish on local markets adds considerably to the income of most households.

Besides fish, many other living aquatic resources are gathered from rivers and wetlands by villagers. These aquatic resources include shrimp, snails, earthworms (used for fish bait), frogs, crabs and aquatic insects. These resources are especially important in villages with a small area of wet rice fields or fields that are particularly vulnerable to flooding. While many non-fish living aquatic resources are utilized as food within individual households, some people realize substantial income from their sale. Women and children often play the major role in the collection of these resources. Table 2.8 presents the proportion of fish caught at various locations.

**Table 2.8 Proportion of fish catch at different locations**

Location	Proportion
Xe Bangfai River	54%
Xe Bangfai Tributaries	3%
Paddy fields	14%
Other small bodies of water	10%
Back swamps and natural ponds	19%
Total	100%

Source: Nam Theun-2 Power Company, 2005b

Families in the lower reach of Xe Bangfai catch on average 168 kg fish/HH/year, sufficient for daily consumption and the production of 2 - 8 jars (= 22 kg) of 'Padek' per HH/year. Padek, salted fermented fish, is the second staple food in Lao PDR, after rice. The remaining catch, on average 20% or some 35 kg/HH/y, is sold on the market. Anecdotal information suggests that production has declined over the last 10-15 years. Average fish size and the number of species caught have also declined. The reason for the decline is thought to be overfishing and use of small mesh monofilament gillnets.

Results from focus group discussions held in focal areas<sup>6</sup> showed in the Nongbok district 70-80% of the households fish for sale, and the remaining households only fishes for their daily consumption. The duration of fishing is reported to be 10-20 days. According to the group discussion, benefits from natural fishing for people living flooded areas vary from 150-3,200 US\$/household in normal flood years to US\$ 290-6,400 for big flood years. The fishing is mainly from river and creeks.

According to the MRC-Technical Paper<sup>7</sup> on fish yields, the data for typical yields of fish in paddy fields in Lao is limited. However, it is reasonable to expect that the fish yield in Lao would be lower than in the Cambodian and Vietnamese flood plains. The lower limits of natural fish in Cambodia and Vietnam were 55-80 kg/ha. The flood plain in Xe Bangfai is under rainy seasonal paddy from June-October, with much shorter flooding duration compared to flood plains in Cambodia and Vietnam. It is estimated that the fish yield would be about 20 kg/ha, resulting in the value of 6 US\$/ha.

## 2.8 Aquaculture

Aquaculture is hardly practiced in the Nongbok District, with less than 3% of households involved. Backyard ponds, rice field fish culture, and village swamp fish culture are the most important types of fish culture. Net cages are least important. No production estimates are available for aquaculture activity in the Project area.

<sup>6</sup> See Annex 2 of the Stage-1 Report for detailed analysis of the focal group discussions.

<sup>7</sup> MRC-Technical Paper, No:16, October 2007:Consumption and the yield of fish and other aquatic animals from the Lower Mekong Basin.



One reason for the low level of aquaculture might be the relative abundance of fish within the river and adjacent wetlands. Lack of infrastructure and well-developed market systems or transport services are other valid explanations, as well as lack of knowledge about fish culturing techniques. However, aquaculture is becoming more common in the lower Xe Bangfai zone, in part due to population pressure and in part due to availability of irrigation waters which are also used in aquaculture.

Natural and man-made fish ponds are stocked in the late spring and early summer for harvests 9-10 months later. The yields vary from 0.5 t/ha for 6,000 ha of natural ponds and 1.2 t/ha for 3,000 ha of man-made ponds. During a field mission in 2009, a fishpond farm was visited exploiting 6 ponds of 10 by 4 m. A net return on investment of US\$ 100 per month was estimated.

## **2.9 Livestock and animal husbandry**

In many villages, livestock is a major source of income. Water buffaloes, cows and pigs act as de facto 'banks' for many families; animals are raised and can be sold for cash during times of particular need, such as during rice shortages or illness of a family member, or to pay the costs of wedding and funeral ceremonies.

Livestock are frequently to be found along, and in, the rivers of the basin. Along the Xe Bangfai River, pigs forage for worms along the riverbanks, water buffaloes wallow in the river and eat large amounts of algae and other water plants, ducks swim and feed in the river, and chickens, goats and cows drink from the river and forage vegetation along its banks. These 'free' services provided by the Xe Bangfai reduce the amount of resources that the owners of livestock would otherwise need to provide to these animals, reducing people's workloads and making the raising of livestock an efficient economic activity.

In the Lower Xe Bangfai area every household has on average 1 - 2 head of cattle, 0 - 1 pig and some 10 chicken. Buffalo's are still an important source of draft power for land preparation, although power tillers are becoming more common, particularly in the larger and more prosperous villages.

## **2.10 Natural Environment**

The seasonally inundated Lower Xe Bangfai floodplain is a sensitive and valuable ecosystem. It consists of a mosaic of fresh water lakes, river ponds, rice paddy and fresh water marshes. As part of the middle Mekong fish migration system is an important habitat for fish species. One hundred and thirty-one species have been observed in the Xe Bangfai, sixty-seven (67) of these in the lower Xe Bangfai. The Xe Bangfai floodplain is also thought to be an important spawning area for different type of fishes. The wetlands are also important as refuges for 'Black fish' in the dry season and as spawning and nursing areas for both 'Black' and 'White fish' in the flood season.

The main dry season fish habitat types in the lower Xe Bangfai River and floodplain are pools and slow water stretches in the river and swamps and stagnant pools on the floodplain. During the wet season, most of these habitats change completely and some are displaced to other areas. In these period fish populations frequently use habitats that are not available during the dry season for spawning, incubation of eggs, and rearing of fry. In the lower Xe Bangfai basin, flooded areas are important as nursery grounds and refuges for juvenile fish. Flood reduction will impact on the reproduction of different fish species, including the fish species migrating in the basin. By consequences, additional

to the reproduction rate and the fish biodiversity in the area, biodiversity in the rest of the basin might be impacted by the reduction of flood in the Xe Bangfai flood plains.

The area around the Xe Bangfai is also an important habitat for a distinctive guild of riverine bird species. Small islands and riverine sand-bars are formed by natural deposition during seasonal high river flow. They form a habitat for pioneer plant communities and breeding sites for water birds.

It is possibly the only wetland in the area that retained a significant proportion of its original vegetation. It is also the largest, about 3 km<sup>2</sup>, and has open water at the end of the dry season.

Nearly 9% (2,726 ha) of the Nongbok District, the district covering most of the project area) consists of wetlands. Some 30% of the district (9,400 ha) is under forest.

No information is available on the fauna in the project area. However, it is known that the wetlands of the Lower Mekong Basin, and thus probably also the wetlands on the flood plains of the Xe Bangfai, host several endangered species, out of which some 15 globally-threatened bird species, the Siamese Crocodile and the Chinese three-striped box turtle.

As an important spawning and nursing area in flood season, and as an important refuge for 'Black fishes' in dry season, as a habitat for different riverine water birds, as wetlands producing timber and non-timber products, the Lower Xe Bangfai floodplains provide ecosystem services to the whole Mekong Basin population. Its ecological value is considerable. The question to how important it is, this is very difficult to quantify. The exact assessment of its value to the populations will be possible the day all these provided services to the communities will have been reduced or disappeared with the reduction or disappearance of the floods.

## **2.11 Other ecosystem services**

River-based livelihoods involve a combination of many different linkages between people and their rivers. While rice fields, fisheries, livestock, and vegetable gardens are the most visible components of local livelihoods and economies, many other resources are perhaps less visible but no less important. Many of these less visible components of local livelihoods can only be appreciated and understood in the light of knowledge and experiences of local people living along, and with, the river. Together, aquatic and forest resources form the foundation of livelihood security for many of the people living in the Xe Bangfai River Basin.

## **2.12 Industry**


There is no significant industry within the project area.

## 3

**FLOODS AND FLOODING****3.1 Flood characteristics**

The Xe Bangfai takes its rise in the Annamite mountain range near to the border with Vietnam west of Thakek and joins the Mekong at rkm 1,166, opposite of the city of That Phanom in Thailand. The river drains an area of 10,240 km<sup>2</sup>.

The upper basin is steep, but below Mahaxai the river slopes are small and the reach from 10 km downstream of Mahaxai to the mouth is affected by backwater from the Mekong (Figure 3.1). At Mahaxai the Xe Bangfai drains an area of 4,520 km<sup>2</sup> or about 44% of the basin. At station Ban Xe Bangfai or Highway Bridge 13S the upstream drainage area amounts 8,560 km<sup>2</sup>, which is 84% of the basin.

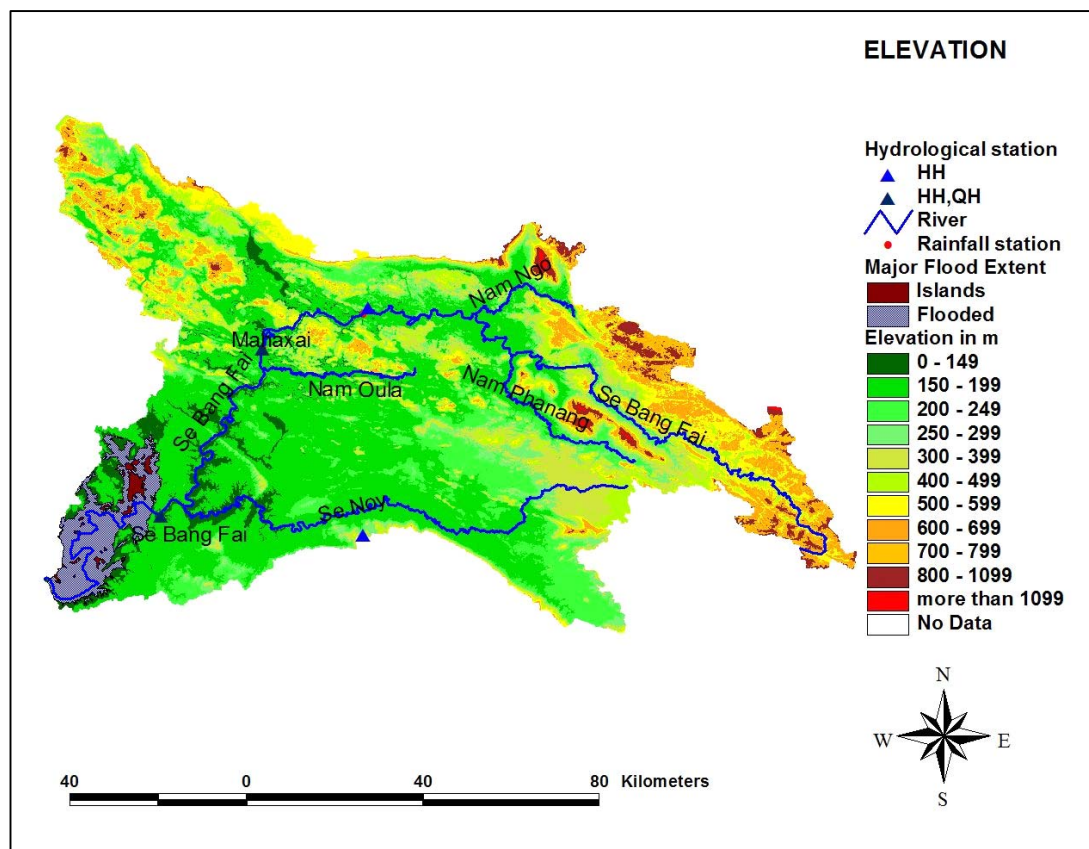

**Figure 3.1 Elevation map of Xe Bangfai basin**

The drainage of the Xe Bangfai basin combined with backwater from the Mekong River cause flooding in the districts Thakek, Nongbok, Xe Bangfai and Mahaxai. The small area in Mahaxai District facing floods according to local information is located near Road 1F between Mahaxai and Nam Oula, and is flooded each year during about one week.

Major flooding takes place between the Mekong and the Highway 13S (see Figure 3.2). Lowest areas in the plains are at 140 m amsl, whereas Nongbok village is flood free at an elevation of 150 m amsl. Flooding here lasts several months, between July and mid-October.

The flood levels in the Lower Xe Bangfai area are a function of three factors:


- (i) The Xe Bangfai River discharge.

- (ii) The water levels in the Mekong, and
- (iii) The drainage of local rainfall.

When the water surface in the Xe Bangfai exceeds a certain level, usually late in the rainy season, backwater from high Mekong River discharges causes the flow in the river channel to be reversed, the Xe Bangfai river can't discharge, the local plains can't drain their runoffs and flooding takes place through the tributaries and overtopping of the river banks.

The flood is characterised by sudden and rapid raise of the water level (5 to 7 days). Except for the period advent, no regular pattern has been identified in the rising of the flood, neither in the predicted height of it.

Local farmers say that a high flood comes every 3 to 5 years and exceptionally high every 8 to 10 years. They say high floods can rise in some days and last for 2 to 3 weeks, inundating their fields with 2 to 4 meters of water.

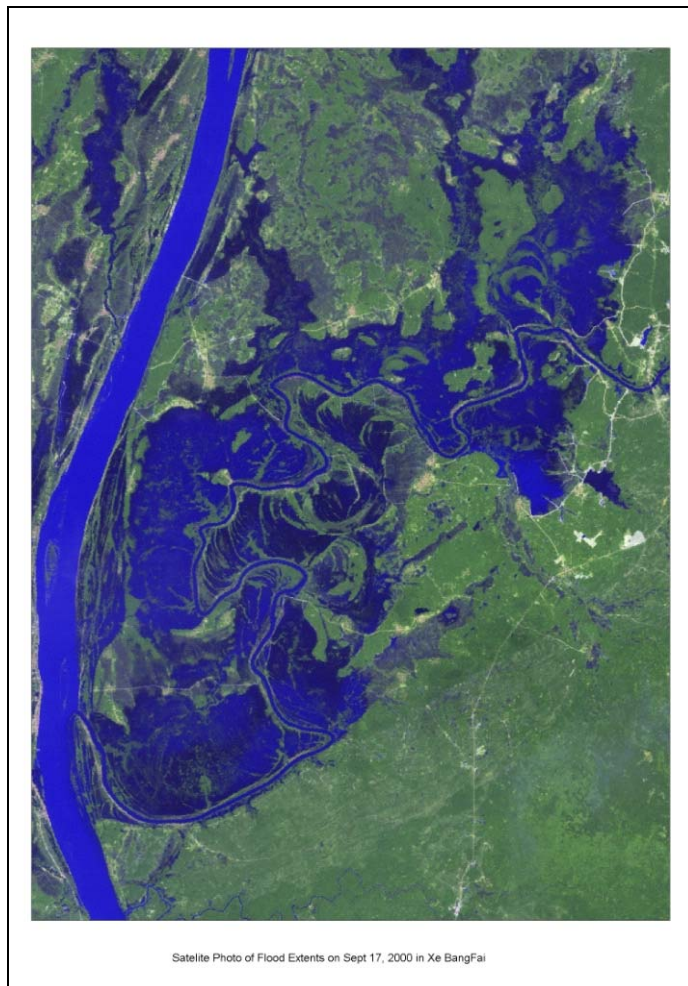

**Figure 3.2 Extend of flooding along lower Xe Bangfai and Mekong in year 2000**

In December 2009 the Nam Theun 2 Hydro-electric Project will be put in operation. The Project will dam the Nam Theun near Ban Sop Hia in Khammouane Province and on average 220 m<sup>3</sup>/s will be diverted to the Xe Bangfai (see Figure 3.3). The planned variation in the release from the Nam Theun 2 Hydroelectric project is between 315 and

60 m<sup>3</sup>/s on week-days and a constant 60-75 m<sup>3</sup>/s on Sundays. However, it is expected that this will not greatly affect the flooding pattern, since the reduced flows of the Nam Theun/Nam Kading into the Mekong River will result in a fall of about 15 cm of the Mekong water levels during flood events. This should allow for quicker drainage of the lower Xe Bangfai during times of flooding, and consequently partially offset the impact of the increased flows in this portion of the river.


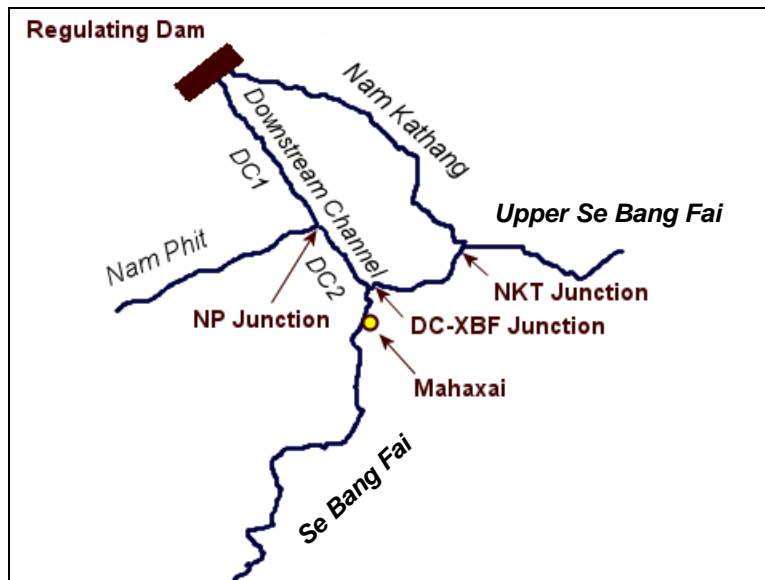


Figure 3.3 Schematic layout of trans-basin diversion from Nam Theun to Xe Bangfai

Figure 3.4 shows the longitudinal section of the Xe Bangfai River downstream of Mahaxai, to the confluence with the Mekong River. The riverbed is shown in grey and the river banks in striped lines. The red line shows the highest water level considering the 1 in 100 year flow in the Mekong and the 1 in 100 year flow in the Xe Bangfai. For these exceptional floods, the water level in the river can be up to five meters higher than the riverbanks.

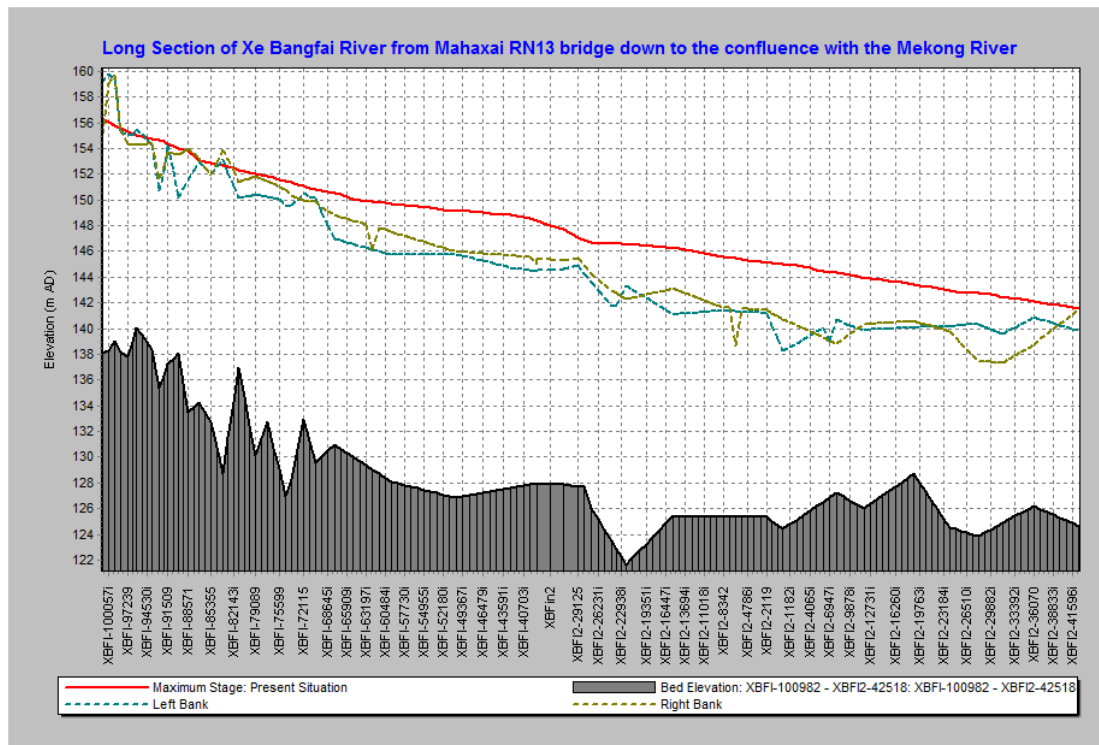

**Figure 3.4** Long section of Xe Bangfai River indicating the water level under extreme flood events, riverbed and bank elevations

### 3.2 Social perception of flooding

Throughout communities in Nongbok, flooding is considered as the main hazard in the region. Floods are considered as harmful. The damages caused by the flood are:

- Agriculture:** The flood is devastating most of the cultivated crops. Only the trees can survive. The flood is damaging the irrigation scheme infrastructure.
- Livestock:** Animals have to be moved to higher locations. Some, especially the smaller animals and poultry, are washed away. Fish is lost from the fish ponds. Herbivores can't be fed, since grazing area is missing.
- Health:** With the floods, all the latrines flow over and infect the water wells. This provokes waterborne diseases for humans and animals. Drinking water is missing. Sanitary conditions are poor.
- Property:** The flood damages houses and community buildings (schools, dispensaries, temples).
- Environment:** Some floods create such erosion that land on river banks. Erosion also occurs in paddies. Firewood for cooking can't be fetched.
- Transportation:** The flood damages the roads. Transport is very difficult in flooding periods.

A discussion amongst farmers exists whether the flood has an effect on sedimentation and soil fertility, and pest control to the land. Most of them say that the impact is beneficial. Little knowledge exists about the potential benefits of flood on agricultural production (such as pest control and restoring soil condition, flushing toxic soil components). It might actually be largely undervalued. The real beneficial impact of flood might get appreciated when the conditions of flood will change with the proposed

project. The latter might be a good reason to incorporate flexibility towards flood control in the infrastructure design.

It is also important to notice that with this perspective of potential loss due to the flood forces the population to avert risk to the maximum. This attitude of the local population has to be considered during public participation in the different stages of the project.

### **3.3 Community preparedness to flooding**

During the flood season, people's activities focus on the following: planting and cultivating the wet season rice crop; fishing and fish cultivation; maintaining fences, embankments and ditches; preparing (and repairing) tools for the upcoming harvest; and, thatching mats used in house construction. The traditional coping mechanisms to protect livelihoods include:

- (i) Prior to the onset of floods, people set aside at least a month's supply of rice, prepare water containers to collect rainwater and collect firewood and other materials used as fuels for cooking.
- (ii) Protect livestock by moving them to higher ground and collecting grass and rice straw to feed them during the period that they are unable to graze.
- (iii) Protect fish ponds by using plastic screens to surround the pond and prevent fish from getting out.

The implications for an assessment of vulnerability to flood impacts include the following:

- (i) In Nongbok, there is a significant slow-down in agricultural activities during the flood season. People who work as agricultural labour will generally have little or no income during this period.
- (ii) As mentioned previously, while there is an abundance of fish including in paddy fields, most people fish primarily to supplement household diets. The low rate of boat ownership and the low prices for fresh fish limit the opportunities to generate significant cash income from these activities.
- (iii) However, according to FG participants, there are few if any problems with food shortages during most floods: Rice and fish are the main food for people during the flood. Here everyone has rice and everyone catches fish.
- (iv) Individuals and traders with access to boats will buy food in market towns and resell it to neighbours and others who cannot access markets.
- (v) The groups that are identified as vulnerable during floods include: elderly people; and, people without boats who are unable to fish or collect firewood.

In 2007, the District Disaster Management Committee (DDMC) for Nongbok prepared a flood preparedness programme with assistance from the MRC-ADPC-ECHO III project. This programme includes:

- (i) Investments such as the upgrading of roads, embankments and water gates (mentioned above).
- (ii) Non-structural measures such as raising public awareness, establish village revolving funds, integrating disaster risk reduction into the school curriculum, land use planning, preparing flood risk maps and early warning systems, and
- (iii) Identifying a budget plan with agency responsibilities for implementation of the programme.

Traditional methods of flood warning include markings on riverside trees, other markers on river banks and water levels at houses and other structures. These have been associated with staged actions such as relocating animals, removing possessions to upper levels of structures, stocking rice and water for one month, relocating children and



elderly people and, finally, tying the house to nearby trees. The strengths of this system were that it was easy for people to learn and remember, and it could indicate rather precisely when different actions should be taken. However, when a tree is cut or a portion of the riverbank is eroded, important markers are lost. In Nongbok, different strategies have been used to respond to floods although the success has not been high according to FG participants:


- (i) In 1997 and 1999, the district provided bags for people to fill with sand and dirt to construct temporary embankments against floodwaters. The success was that there was a high level of participation and cooperation, but the floodwaters were too fast/high.
- (ii) The Office of Social Welfare is responsible for emergency response. The planning is done without consultation of people living in the area although they participate as much as possible in flood protection practice/drills. However, in a bad flood the waters rise too fast and too high.

There are been no formal flood recovery plans in the district (according to FG participants). The chief of each village cluster and village administration committees prepare and implement ad hoc plans with a small amount of assistance from the Office of Social Welfare. There is, however, a high level of participation and contribution of labour by villagers for recovery activities such as clean and repairing damaged houses, shops and businesses, community buildings and their equipment (schools, clinics, etc.) and damaged land.


### **3.4 Flood hazards**

The flood levels in the lower Xe Bangfai are not only due to high river discharges but are also affected by high water levels in the Mekong at the river mouth at That Phanom. The floods in this region are therefore classified as combined floods. Appendix 1 presents the results in detail of the flood hazard assessment for Xe Bangfai based on ISIS calculations. Figure 3.5 to Figure 3.8 present the flood hazards maps for the situation *without* embankments, which represents the present situation. Since 2002 embankments have been made on the left bank, but those have not been very effective because they do not fully protect the floodplain behind. The flood still reaches those areas.



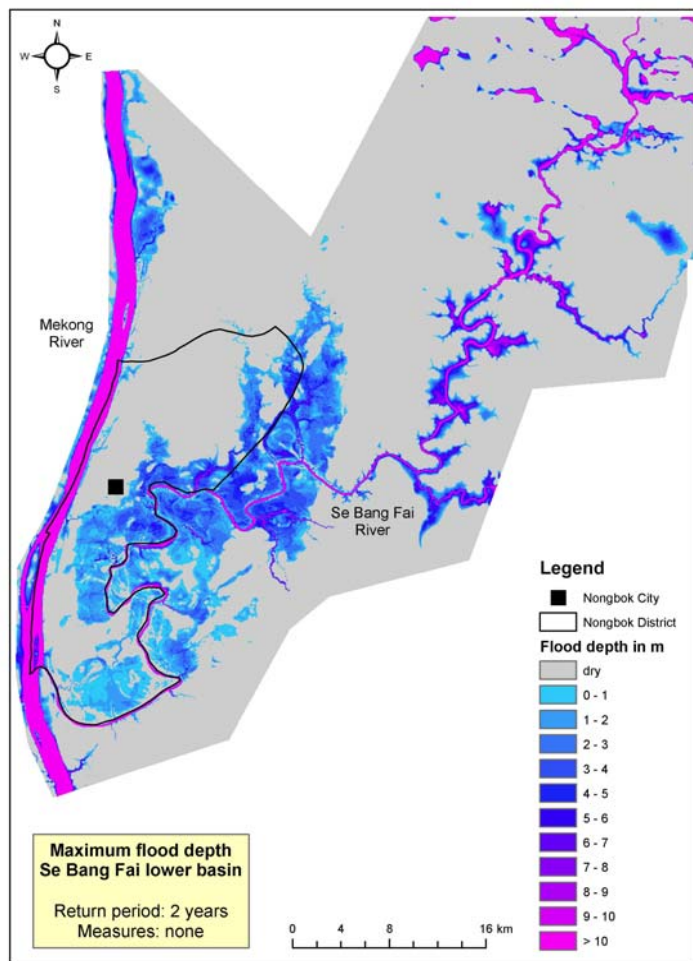

**Figure 3.5** Flood depth and extent Lower Xe Bangfai, T= 2 years

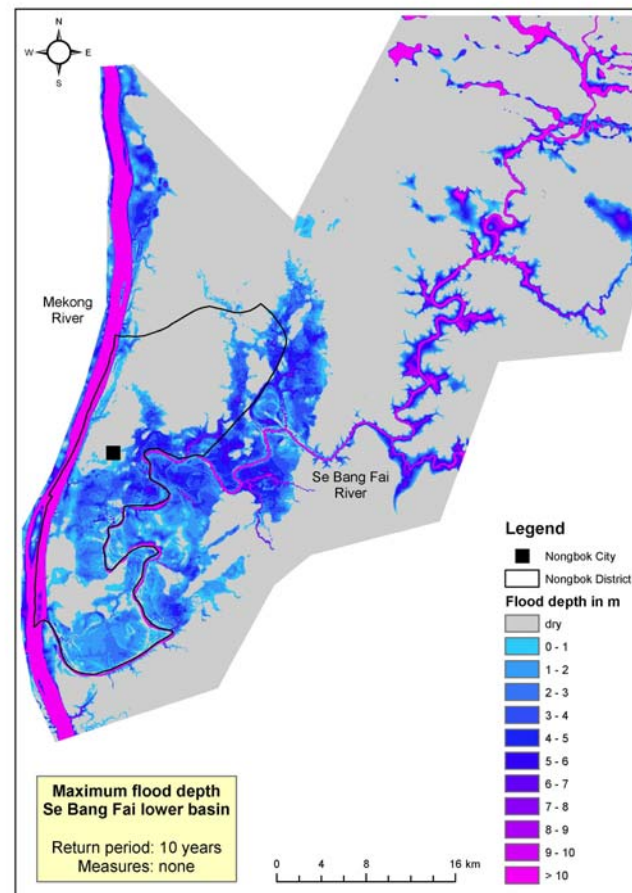

**Figure 3.6** Flood depth and extent Lower Xe Bangfai, T= 10 years

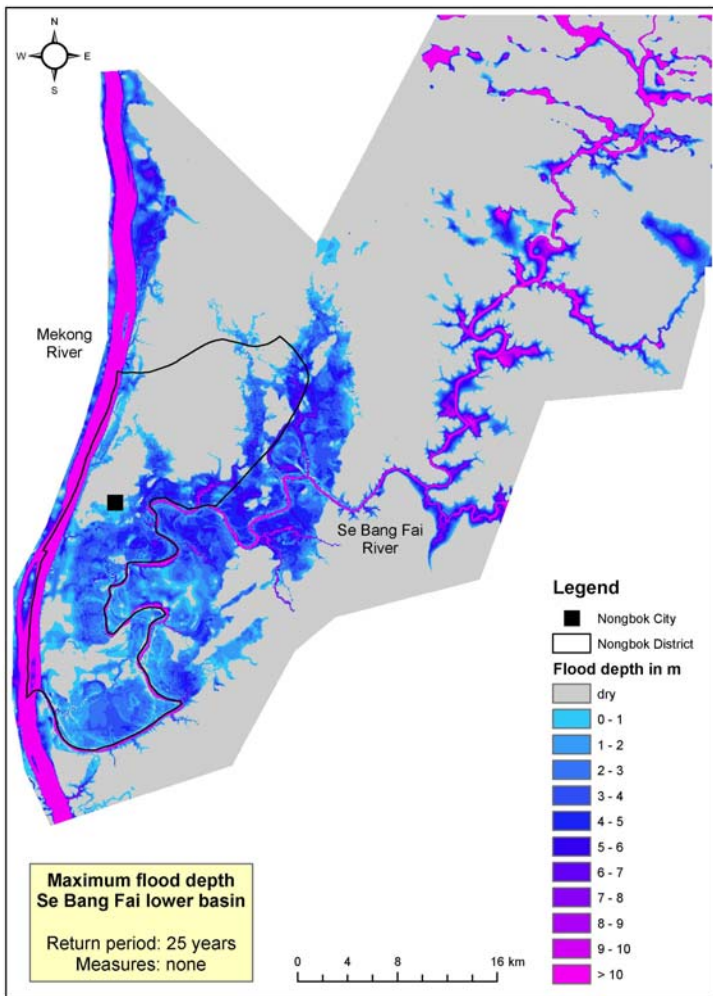


Figure 3.7 Flood depth and extent map Lower Xe Bangfai, T= 25 years

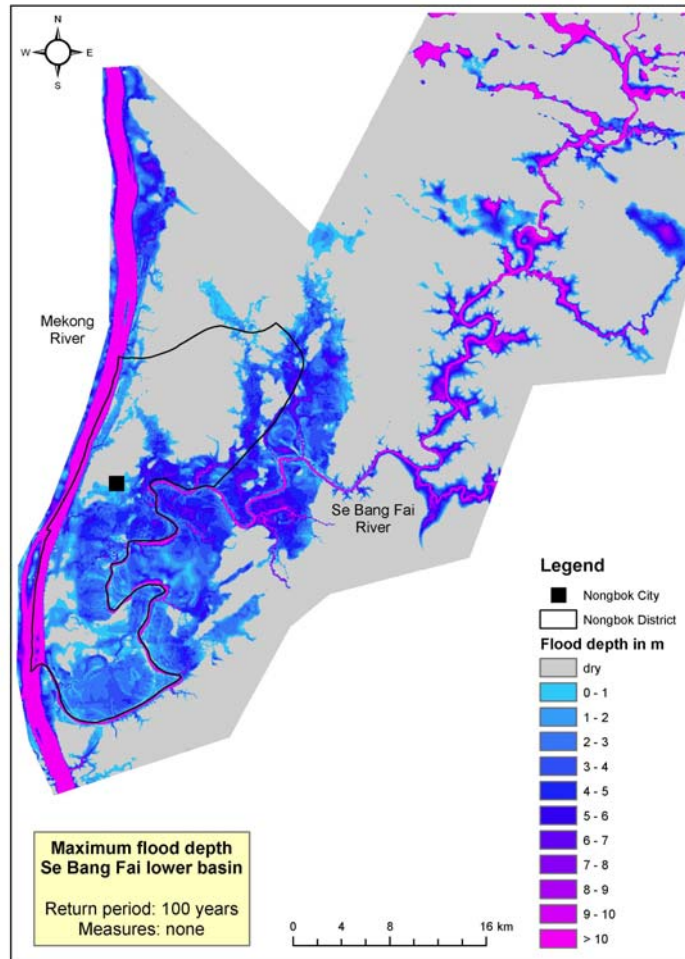


Figure 3.8 Flood depth and extent map Lower Xe Bangfai, T= 100 years

The flood prone areas in the Xe Bangfai basin are:


- (i) Between the Mekong River and Highway 13S, north and south of the Xe Bangfai River, creating extensive and long lasting flooding, and
- (ii) Near Road 1F between Mahaxai and Nam Oula with flooding of one week duration per year on average.

### 3.5 Flood damages

*The Best Practise Guidelines for Flood Risk Assessment in the Lower Mekong Basin* gives the methodology to produce maps of flood levels, flood depths, flood damages and flood risks with the ISIS model. These have been applied in stage 1 of the FMMP-C2 for the Nongbok district. Following the absolute damages assessment approach for combined flooding (tributary and mainstream flooding), damage figures for certain flood return periods have been produced (see Table 3.1). The damages include the direct and indirect damages occurring with floods. Appendix 2 presents the flood damages and risk study in detail.

**Table 3.1 Damages for housing, agriculture and infrastructure/ relief (US\$ mln)**

Damage type	Damage 2 year r.p.	Damage 10 year r.p.	Damage 25 year r.p.	Damage 100 year r.p.
Housing	0.01	0.05	0.08	0.12
Agriculture	1.91	6.83	9.64	13.88
Infrastructure	0.28	0.89	1.24	1.77
Total	2.20	7.77	10.96	15.77

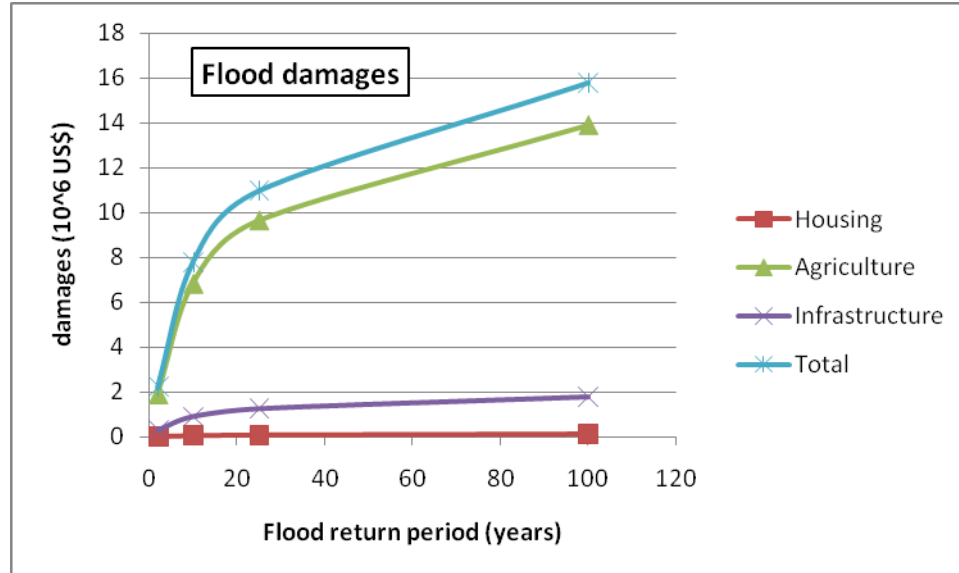

**Figure 3.9 Flood damages for floods with different return periods.**

### 3.6 Annual flood risk

From the return period and the damage as given by Table 3.1 the probability – damage curve has been produced (Figure 3.9). The expected damage or risk can be determined by calculating the area under the curve. For the Nongbok district the expected annual risks are presented in Table 3.2.

**Table 3.2 Annual risk, Nongbok district (US\$ mln per year)**

Damage type	Risk
Housing	0.014
Agriculture	2.605
Infrastructure	0.362
Total	2.981

It is estimated that the flood risk in Nongbok District is of the order of US\$ 3 mln per year. 87% of this risk is related to agricultural damages. The agricultural damage is the wet season rice harvest loss. Appendix 2 presents the flood damage and risk assessment.

The idea was raised to integrate the development of the agricultural sector in the area by considering increasing the irrigation schemes in the area.

The fact that the villages are located on high ground and many houses are built on poles of 2.5-3 m above ground level explains the insignificant damages to houses by the flood.

Agriculture, the peoples' livelihood, is most at risk when compared to the housing and infrastructure. This explains the risk avert attitude that can be noticed in the area. The local populations are to be considered as risk managers. It is this attitude that is orienting their decisions.

### 3.7 Flood benefits

Apart from the negative impacts of flooding as mentioned above, floods also have positive impacts on the social economy such as natural fishing and soil fertility and pest control. Results from focus group discussions held in focal areas<sup>8</sup> showed that benefits from natural fishing for people living flooded areas vary from US\$ 150-3,200 per household in normal flood years to US\$ 290-6,400 for big flood years. The fishing is mainly from river and creeks.

According to the MRC-Technical Paper<sup>9</sup> on fish yields, the data for typical yields of fish in paddy fields in Lao is limited. However, it is reasonable to expect that the fish yield in Lao would be lower than in the Cambodian and Vietnamese flood plains. The lower limits of natural fish in Cambodia and Vietnam were 55-80 kg/ha. The flood plain in Xe Bangfai is under rainy seasonal paddy from June-October, with much shorter flooding duration compared to flood plains in Cambodia and Vietnam. It is estimated that the fish yield would be about 20 kg/ha, resulting in the value of US\$ 6 per ha.

<sup>8</sup> See Annex 2 of the Stage-1 Report for detailed analysis of the focal group discussions

<sup>9</sup> MRC-Technical Paper, No:16, October 2007:Consumption and the yield of fish and other aquatic animals from the Lower Mekong Basin

**4****STRATEGIC DIRECTIONS FOR FLOOD RISK MANAGEMENT****4.1 Introduction**

The main objective of the proposed project is to reduce the flood risks. The reduction of the flood risk can be achieved by either the reduction of the flood hazard with the help of structural measures, the reduction of the vulnerability or a combination of both.

The flood risk in the lower Xe Bangfai is mostly due to agricultural damages to the wet season crop. Reduction of vulnerability is therefore most effective if the vulnerability of the agricultural production is reduced. This can be done by adapting the cropping pattern to the flood regime and/or the introduction of more flood resistant crops.

It is assumed that the actual cropping pattern is already optimally adjusted to the flood regime (traditional coping mechanism) and that further vulnerability reduction is to be sought in the use and/or development of less vulnerable varieties.

**4.2 Reduction of flood hazard**

The reduction of the flood hazard in the lower Xe Bangfai area can in principle be achieved by:

- (i) The creation of flood retention capacity in or upstream of the flood prone area. Such measure allows for the reduction of the Xe Bangfai peak discharges and, consequently of the peak water levels in the river and adjacent floodplains.
- (ii) The creation of additional discharge capacity of the river system. Such measure will reduce the peak water levels. The discharge capacity can be increased by deepening and or widening of the river itself or by creating additional capacity in a diversion and/or by-pass canal.
- (iii) The construction of embankments that protect selected areas against high water levels.
- (iv) The construction of gates that prevent floods to enter the Xe Bangfai floodplains.
- (v) The improvement of the drainage system in the flood plains, allowing for a reduction of the duration of the flooding. Further reduction of the duration of flooding can be obtained by the installation of gated structures at the locations where the (natural) drainage system of the flood plains drains into the Xe Bangfai or the Mekong River.

Regarding the creation of flood retention capacity upstream of the flood prone area, a project idea was identified concerning the construction of a flood storage reservoir in the Xe Bangfai at the confluence with the Xe Noy, just upstream of the Road 13 crossing, combined with construction of a flood gate in the Xe Bangfai mouth. This option has been discarded for reasons of far-reaching resettlement needs, impact on environment and financial construction costs.

Under the actual conditions the floodplains have their own natural retention capacity. The creation, reservation and/or enhancement of retention capacity in the flood prone area is, therefore, only relevant in combination with the construction of embankments. In that case, part of the flood plain can be protected while another part is reserved for the retention of flood waters. The proportion between the two, 'how much is to be protected?' versus 'how much must be reserved for retention?', is a political choice that ought to be agreed amongst the different stakeholders. The retained flood water might be appreciated as water for irrigation in the dry seasons.

For the creation of additional discharge capacity, reference is made to previous studies on the flood diversion canal 'Xelat' from Banne Sokbo to Banne. A flood diversion option is thought to be cost wise much more attractive than increasing the discharge capacity of the river channel itself.

At the Nongbok district level, ideas have been developed that focus on drainage improvement rather than on flood protection. A number of 23 schemes have been identified for widening and deepening (natural) drains to be provided with gates at the confluence with Xe Bangfai or Mekong. These schemes try to achieve a reduction of the inundation time of flooded area to 15 days or less.

#### **4.3 Reduction of flood risks**

The development of a strategic direction for flood risk management in the lower Xe Bangfai area is closely related with the envisaged land use scenarios. The risk under the present land use conditions is relatively low, essentially because the actual cropping patterns are fully tuned to the natural flood cycle. Nevertheless, the risk under the actual conditions is still of the order of US\$ 3 mln per year in the Nongbok district alone.

##### **Reduction of the actual flood risk**

It is important to consider that the flood damages are mostly related to the loss of wet season agricultural production. Compared to the latter, the loss of housing is negligible (< 1%), and the loss to infrastructure represents (12%). If no substantial development of the agricultural sector in the lower Xe Bangfai flood plain is envisaged, the reduction of flood risk in this area should focus on the reduction of the actual flood damage in this sector.

It is anticipated that substantial reduction of the existing risk can be achieved by reduction of the duration of flooding. The option of drainage improvement in combination with gating of the Xe Bangfai tributaries could be an attractive option to achieve this goal.

The strategic direction for flood risk management is closely related with the envisaged future land use scenarios. The risk under the present land use conditions is relatively high: though the actual cropping patterns are tuned to the flood cycle the total risk under the actual conditions is still in the order of US\$ 3 mln per year in the Nongbok district alone. Assuming similar socio-economic conditions prevail in the left bank floodplains, the total risk amounts to over US\$ 6 mln per year

The diversion option will reduce the peak levels along the Xe Bangfai downstream of the diversion canal. It will have no impact on the Mekong back waters.

##### **Flood protection for agricultural development**

Khammouane and Savannakhet provinces have expressed desire to develop the agricultural sector in the lower Xe Bangfai floodplains. This would increase risks in the absence of flood protection measures. As such it makes it bankable to invest in flood protection schemes. Polder development, with or without a diversion scheme, is then the obvious approach.

It is advised to consider the loss of environmental benefits, especially fisheries related benefits, in the planning and design of polder schemes in the lower Xe Bangfai area in order to minimise them.

## 5 THE LOWER XE BANGFAI PROJECT

### 5.1 Structural measures for flood management

Two proposals have been investigated. A first project proposal was formulated in Stage 1 of FMMP-C2 which focuses on the protection of the flood plains in Khammouane province only. This proposal investigated three alternative measures for flood risk reduction.

A second project proposal has been forwarded jointly by the Khammouane and Savannakhet provinces. In that proposal both the right and the left bank flood plains would be protected.

### 5.2 Proposal 1

The project proposal considers only protection of the flood plains around Nongbok, on the right hand side of the river. For Khammouane Province the following alternative measures have been investigated:

- (i) Step-wise construction of embankments along Xe Bangfai and Mekong: a three-step construction of a 94 km long embankment along the right bank of Xe Bangfai River and along the Mekong. (see Figure 5.1).
- (ii) Construction of embankments along Xe Bangfai: one-step construction of a 63 km long embankment along the right bank of Xe Bangfai River only from Nongbok to Danpakse (see Figure 5.2).
- (iii) Construction of a bypass canal 'Xelat' from Sokbo to Bungsan Nua in Nongbok District to the Mekong. The bypass canal (see Figure 5.4) involves a 7 to 8 km long canal with bed width of 200 m at an invert level of 138 m amsl.

A combination is proposed because it is expected that the construction of a bypass canal 'Xelat' can reduce the cost of the embankments.

#### 5.2.1 Alternative 1: Dyke construction in three phases

The construction of embankments along the Xe Bangfai and the Mekong River will be carried out in 3 phases, see Figure 5.1.



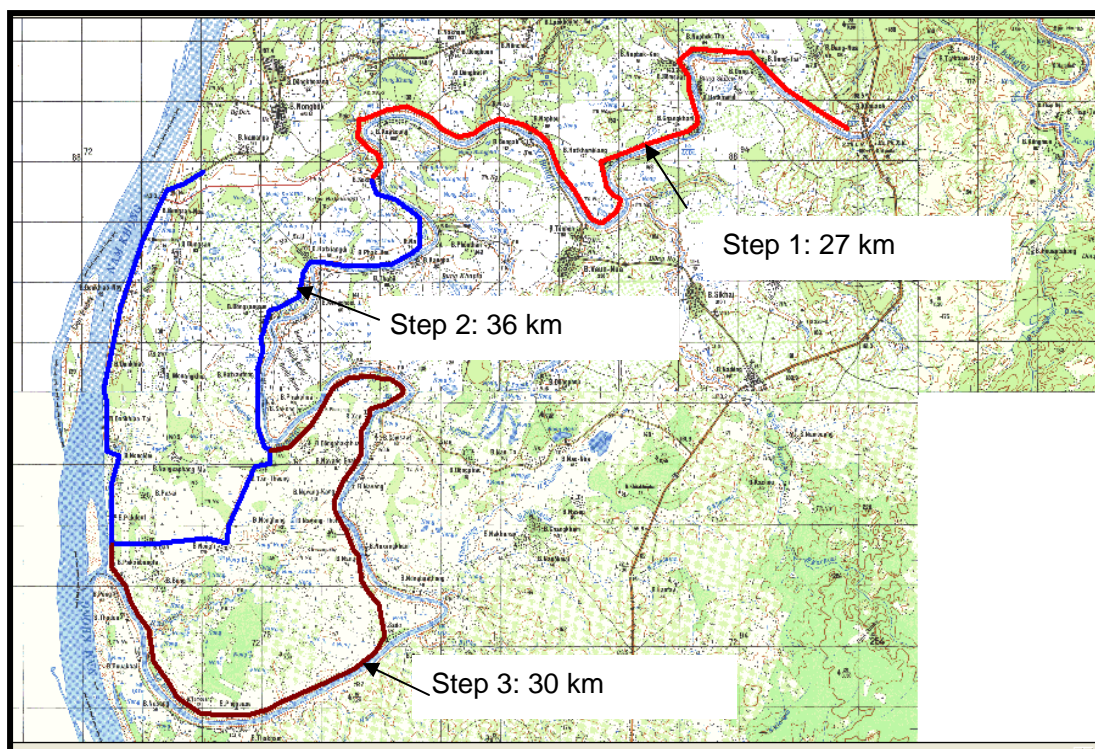


Figure 5.1 Alternative 1: embankment construction in 3 phases

### Phase 1

In FMMP-C2, Stage 1, an embankment between Banne Nongbone in the Xe Bangfai District and Banne Sokbo in the Nongbok District (27 km) will be constructed along the right bank of the Xe Bangfai. Four new control gates have to be constructed in tributaries that discharge to the Xe Bangfai in this river stretch. Besides, four pumping stations and a 3 km long drainage canal have to be constructed. After completion of this phase, 9,700 ha land and 26 villages would be protected against flooding.

Technical features:

- Crest width: 6 m
- Height of embankment: 3.5 - 4 m
- Crest elevation: 148 m – 145 m
- Side slope: not mentioned in proposal

See comments of the Consultant on the technical features as given in Section 5.3

Estimated total cost: US\$ 10,730,000

### Phase 2

In Phase 2 the embankment will be extended over a length of 36 km from Banne Sokbo to Banne Bungsanetha. Four new control gates have to be constructed and 5 control gates have to be repaired next to the construction of 9 pumping stations and 5 km drainage canals. After phase 2 an additional 4,000 ha and 17 villages will be flood proof.

Estimated additional total cost: US\$ 12,687,500

### Phase 3

In the final Phase 3 another 30 km of embankment will be constructed between Banne Tantheung and Banne Dannepakse in the Nongbok District. One control gate will be constructed and one gate will be repaired. In this phase also 2 pumping stations and



3 km drainage canal have to be constructed. Phase 3 will provide protection against flooding for an area of 3,000 ha including 13 villages.

Estimated additional total cost: US\$ 7,456,250


Table 5.1 gives a summary of the works to be carried out.

**Table 5.1 Summary of works and protection provided**

No	Project component	Phase 1	Phase 2	Phase 3	Total
1	Dike construction	27 km	36 km	30 km	93 km
2	Construction of new control gates	4	4	1	9
3	Repair of existing control gates	0	5	1	6
4	Construction of pumping stations	4	9	2	15
5	Construction of drainage canals	3 km	5 km	3 km	11 km
	Total cost (US\$ mln)	10.7	12.7	7.5	30.9
	Area protected	9,700 ha	4,000 ha	3,000 ha	16,700 ha
	Villages protected	26	17	13	56

#### 5.2.2 Alternative 2: One step embankment construction

This alternative considers constructing a protection embankment along the right bank of the Xe Bangfai only. The embankment runs between Banne Nongbone in the Xe Bangfai District and Banne Danpakse in the Nongbok District and has a length of 65 km (See Figure 5.2). For this alternative 9 new control gates have to be constructed and six existing gates have to be repaired. At four locations drainage canals have to be constructed.

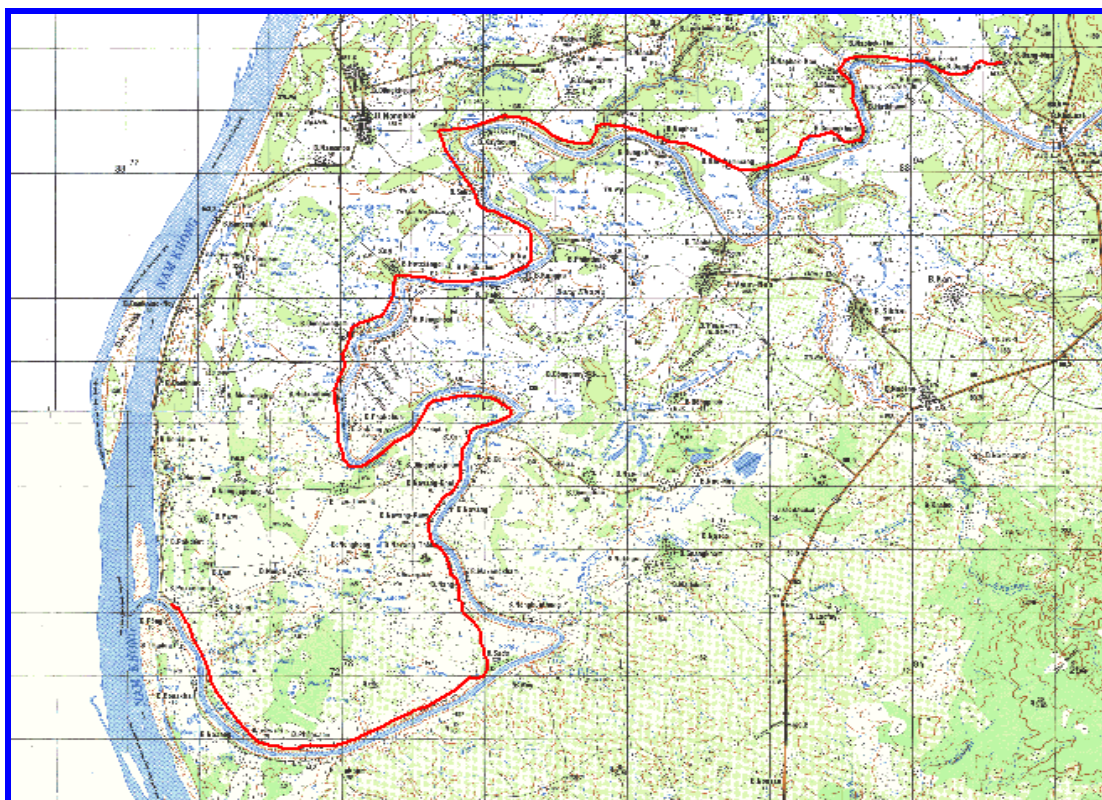

**Figure 5.2 Alternative 2: One step embankment construction (right bank)**

Technical features:

- Crest width: not mentioned in proposal, likely 6 m
- Height of embankment: not mentioned in proposal
- Crest elevation: not mentioned in proposal
- Side slope: not mentioned, likely 1.5

**Table 5.2 Estimation cost for construction (US\$)**


No	Items	Total
1	Soil work	15,339,375
2	New control gate in 9 locations	4,500,000
3	Repair control gate in 6 points	600,000
4	Drainage canal construction in 4 points	20,000
Total		20,639,375

### 5.2.3 Alternative 3: flood diversion canal

The construction of a diversion canal will reduce the peak levels of the Xe Bangfai River but it will have no impact on the Mekong backwaters. This measure is to be considered in combination with embankment of the Xe Bangfai. Embanking the Xe Bangfai River solely would raise the water level in the river during flood season. In order to reduce this, a diversion canal has been proposed.


Additional to alternatives 1 or 2, a diversion canal with a bed width of 200 m and a length of about 8 km will be constructed to divert water from the Xe Bangfai near Banne Sokbo (about 46.4 km upstream of the confluence with the Mekong River) to Banna Bungsan Nua along the Mekong.

Figure 5.3 presents a cross section of the diversion canal.

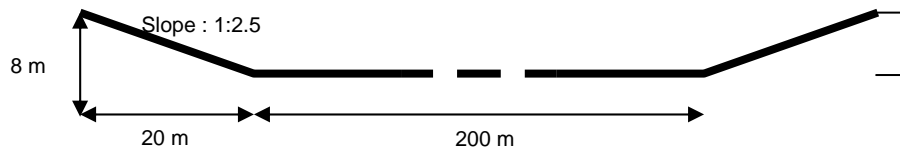

**Figure 5.3** Cross section of diversion canal

Two possible lay outs for this so-called Xelat canal have been distinguished, see Figure 5.4. The bed elevation will be 138.0 m amsl.

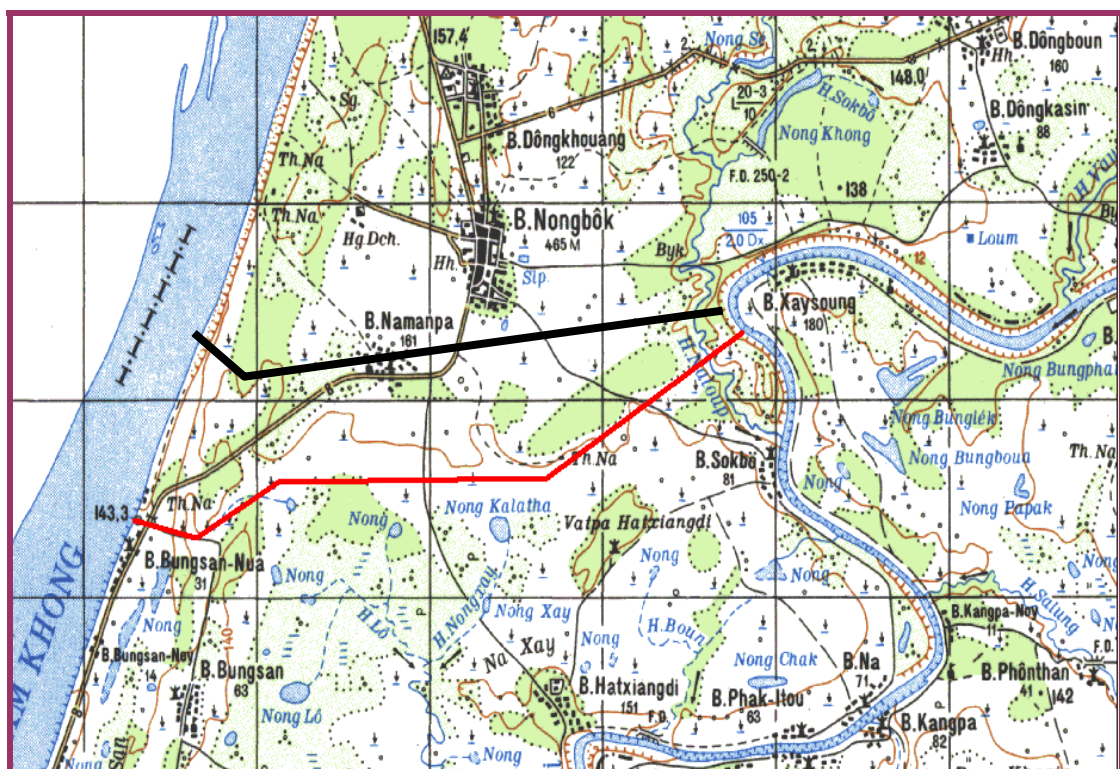

**Figure 5.4** Proposed alternative lay outs of the Xelat Diversion

Estimated total cost: US\$ 9,589,000

The proposal describing the three alternatives doesn't mention any protection level for the design of the embankments, but it is understood that this was taken at 85%

In the const estimation, no land acquisition or relocation costs have been considered

The most important factor speaking against the proposal and its alternatives is that only the right bank side of the river would be protected, the other side has already some low level of protection and the impact of proposal 1 would lead to increased flooding in Savannaketh, which is to be avoided. Proposal 2 remedies this shortcoming. **Proposal 1 - and its alternatives - is not a serious option in the context of**



integrated flood risk management and is therefore not further considered in impact assessments.

### 5.3 Proposal 2

The second project proposal is a joint proposal coming for the Khammouane and Savannakhet Province administration, supported by the Department of Agriculture and Forestry.

The aim is to protect both the Savannakhet province and the Khammouane province by building embankments on both the left and right bank of the Xe Bangfai.

The construction is planned to be executed in 4 phases as shown in Figure 5.5. The proposal also includes a reservoir, irrigation scheme and a mini hydropower station; these elements of the provincial proposal are not being considered in this IFRM Plan preparation since there is no relation with flood protection.

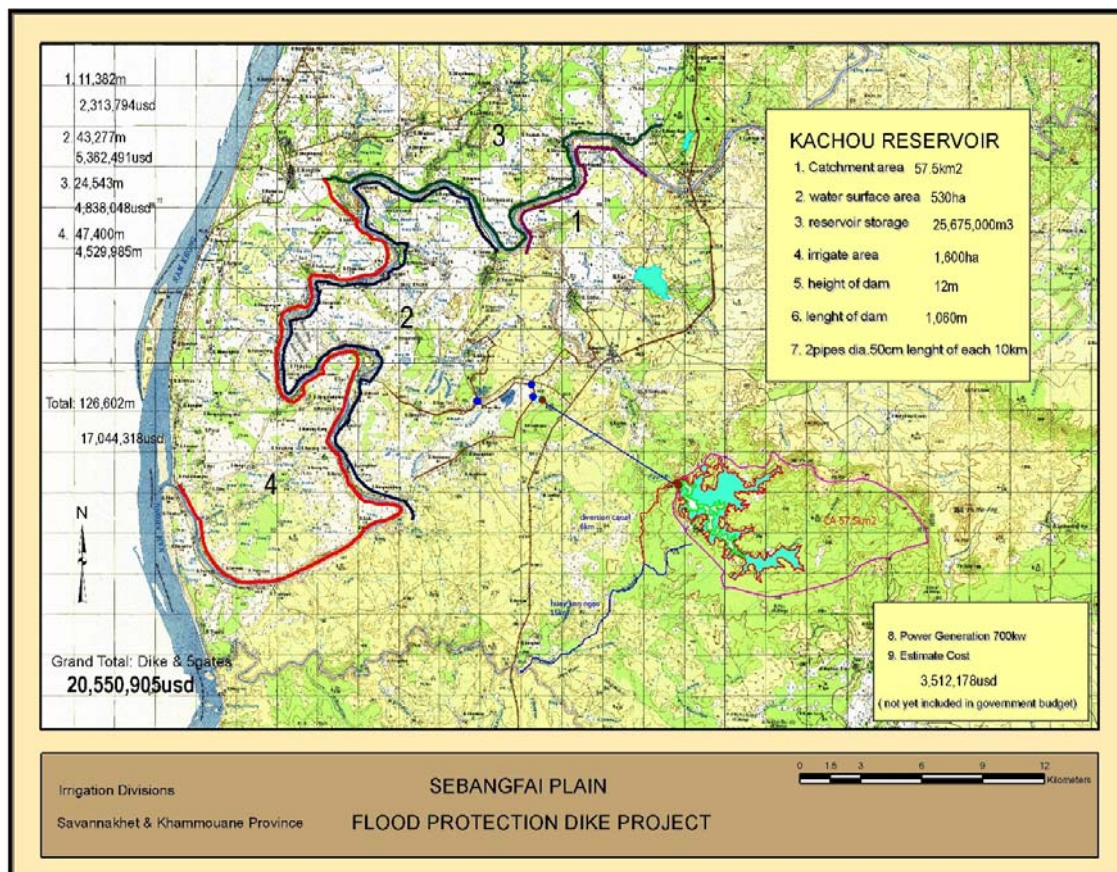


Figure 5.5 Proposal 2: embankments on the left and right bank of the Xe Bangfai River.

The design has the following features:

- protection against floods having a 15% probability (1 in 6.7 years)
- Crest width: 6 m;
- Height of embankment: 3.5 – 4 m;
- Crest elevation: 148 m with a slope of 1:10,000;
- Side slope: 1:1.5;

- Freeboard: 0.60 m.

Estimated total cost for installation of 5 gates: US\$ 3,506,587

Estimated total cost for construction of 127 km embankments: US\$ 17,044,318

Estimated total cost: US\$ 20,550,905.

The Consultant has the following comments on the design features:

- (i) It is not clear how design water levels have been determined;
- (ii) The protection level of 15% is too low to achieve substantial flood risk reduction; the proposed design seems not to be economically feasible. The provinces take as benefits a value of US\$ 200 per ha of paddy land, but the benefit is to be derived from the risk reduction function at 15%.
- (iii) Height of embankment follows from the bank elevations and the design water level and is more variable than the quoted range.
- (iv) Side slopes are too steep for river embankments, the outer slope (land side) should be designed based on the geotechnical characteristics of the earth material available in the area and seepage analysis.
- (v) Freeboard is too small, for river embankments this is to be calculated taking into account, wave heights, wind set up, settlement of the embankment after construction, and a surcharge to cover a number of uncertainties in the calculation of the design water levels. These uncertainties are in the field of hydrology and hydraulics (short data time series available), analysis methodologies, quality of the ISIS schematization, etc.

#### 5.4 Impact of proposals on flood hazards

Flood maps have been produced for flood return periods of 2, 10, 25 and 100 years for the following cases have been determined including preparation of flood depth and flood extent maps (see):

- (i) situation with no embankments (see section 3.4)
- (ii) situation with embankments along the left bank since 2002;
- (iii) situation with embankments on both banks,
- (iv) situation with diversion canal and no embankments
- (v) situation with diversion canal and embankments of left and right bank [maps will follow].

##### Impact of embankments

The embankments protect the downstream floodplains but back up the water further upstream. The situation with only embankments on the left is profitable for the downstream floodplain locations on the left but disadvantageous for locations on the right.

Figure 5.6 shows the results for three simulated situations of the river:

- (i) situation with no embankments
- (ii) situation with embankments along the left bank
- (iii) situation with embankments on both banks

Figure 5.7 shows the mutual differences in 100-year water level between the three cases. From the figure it can be seen that differences are negligible at both the upstream and downstream model boundary. For the upstream boundary this is because it is outside the backwater reach of the location where the embankments begin (at Highway Bridge 13S). At the downstream end differences are small because the flow in

the Mekong dominates the water levels and therefore water levels are not influenced by the embankments along the Xe Bangfai. Moving to the middle sections, differences are increasing, being at maximum around 70 kilometres from the river mouth. The embankments cause water to stay in the river and keep the flood plains dry. As a result, water levels in the river rise higher than in case of the situation with no embankments. For the 100-year water level the embankments cause a maximum rise in water level of 1.2 m.

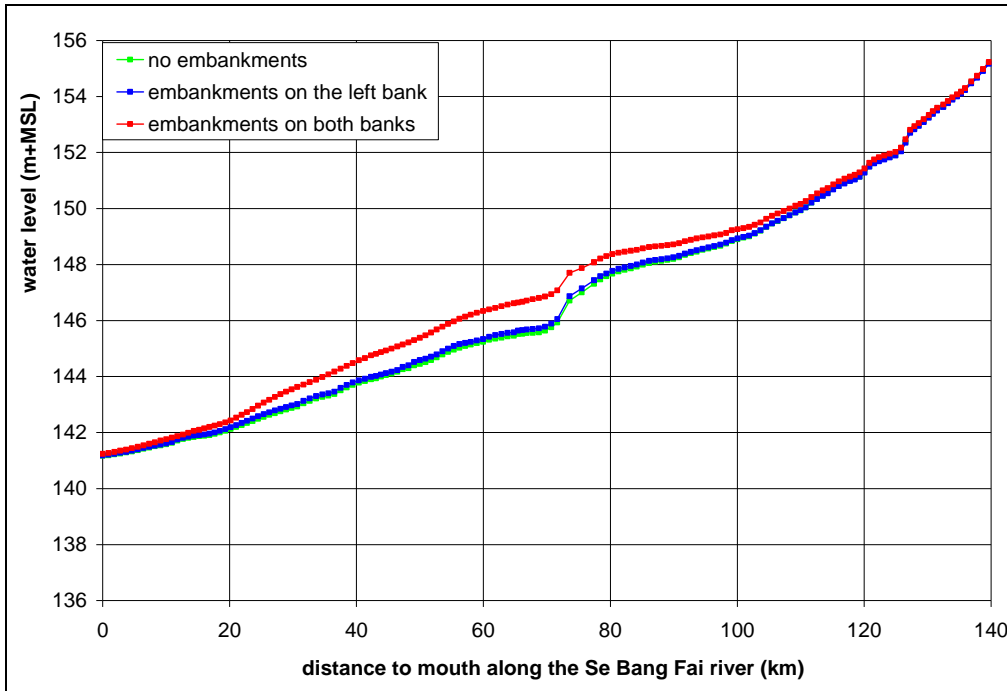


Figure 5.6 Computed 100-year flood level along the Xe Bangfai river

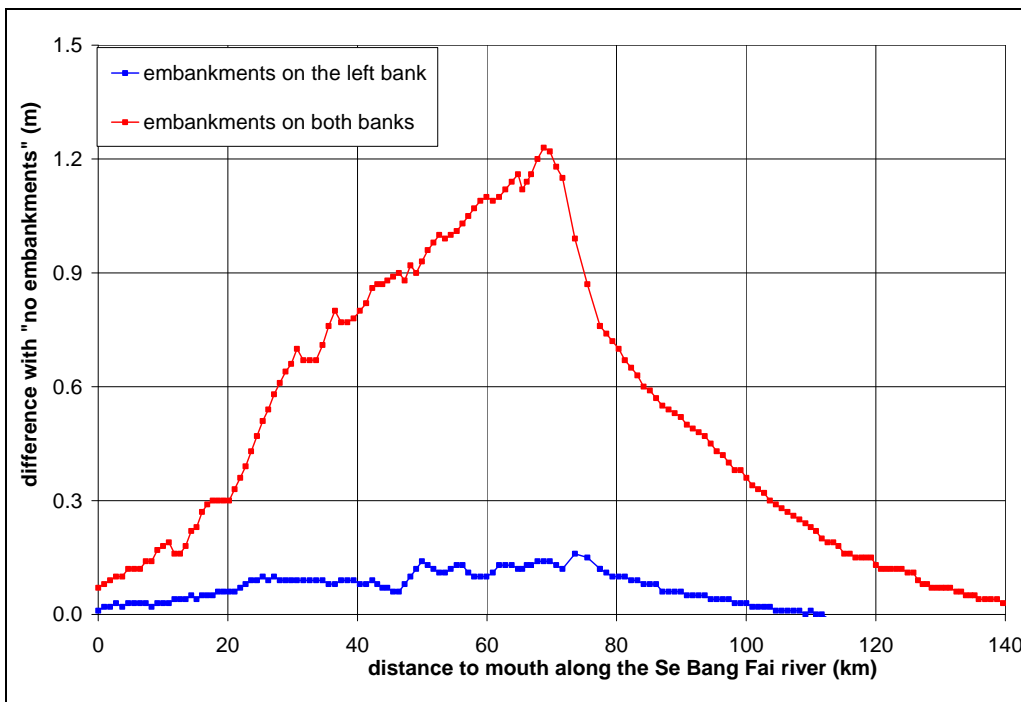


Figure 5.7 Differences in the computed 100-year flood level along the Xe Bangfai.

### **Impact of diversion canal**



The 100-year water levels have been derived for all locations along the lower reach of the Xe Bangfai River, assuming the existence of the diversion canal.

Figure 5.8 compares the resulting 1 in 100-year water level with the reference situation in which no diversion canal is present (no embankments). Figure 5.9 shows the difference between the two cases. The diversion canal has a maximum reducing effect of almost 2 m on the 100-year water level in the river, approximately 50 km from the river mouth. The effect reduces to approximately zero at the upstream and downstream boundaries. For the 1 in 100-year water level a maximum reduction (near the off-take) of 1.83 m is observed.

The effects of a diversion canal from Xe Bangfai to the Mekong to improve the drainage conditions have been investigated. A 200 m wide bypass with bed level at 138 m amsl conveyed for selected years up to 500 to 1000 m<sup>3</sup>/s, lowering the maximum water levels along the rivers near the off-take with about 0.50 to 1.00 m. Similar values are found for the flood plains with substantially reduced flood duration. For the 1 in 100-year water level a maximum reduction (near the off-take) of 1.83 m is observed.


In order to find the optimum dimensions of the diversion canal, we tested a series of canal dimensions starting with a bottom width of 100 m and invert of 140 m amsl increasing with steps of 25 m to 200 m and invert of 136 m amsl. Figure 5.10 shows the results for probability of exceedance of 1% (1 in 100 years). These results were used to calculate earth work volumes for embankments and diversion canal options. Optimization was done to find the optimum economic internal rate of the whole project; this is reached with a canal of 125 m wide and bottom level of 139 m amsl. However, without a diversion canal total costs are lower and a higher economic return on the investment is reached.

**Figure 5.8** Computed 100-year flood level along the Xe Bangfai river for the cases with a 200 m wide diversion canal and without diversion canal.

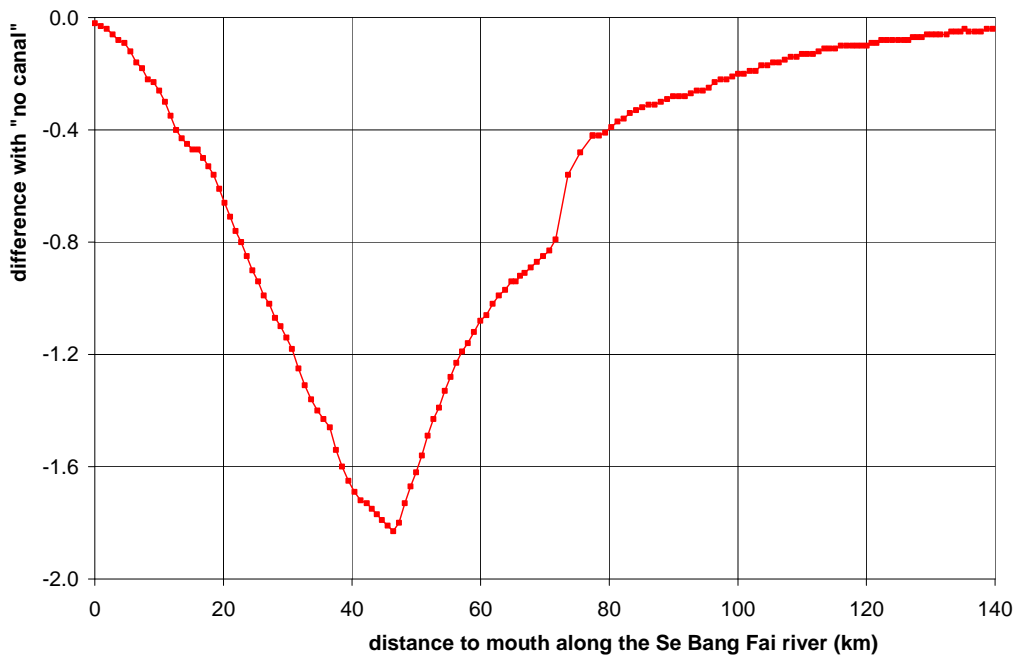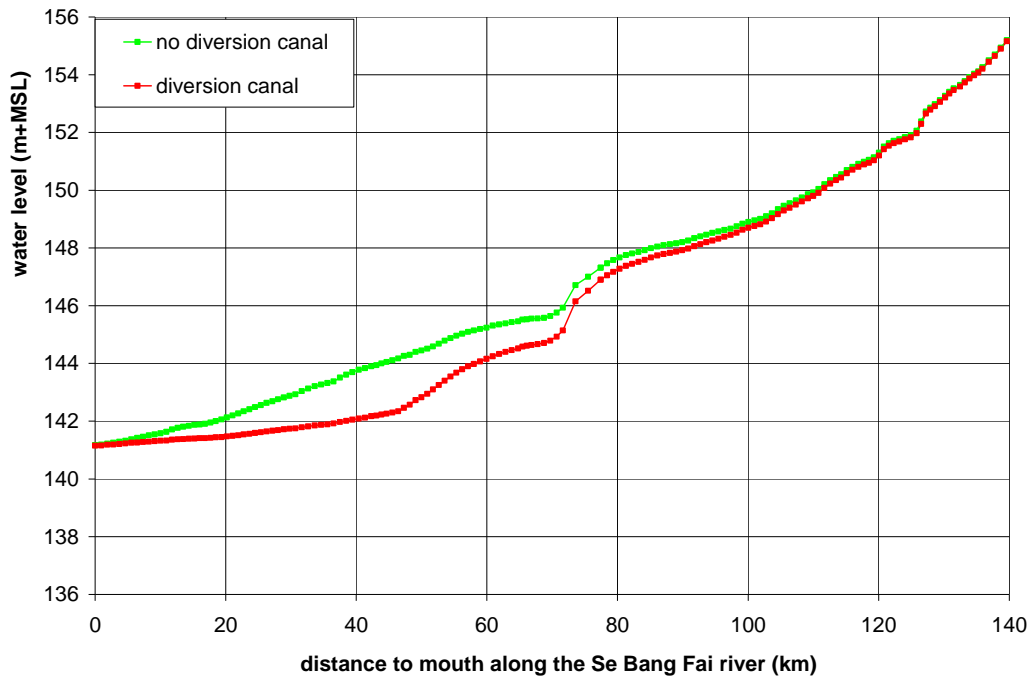

**Figure 5.9** Differences in the computed 100-year flood levels along the Xe Bangfai river for the cases with and without diversion canal of 200 m bottom width.



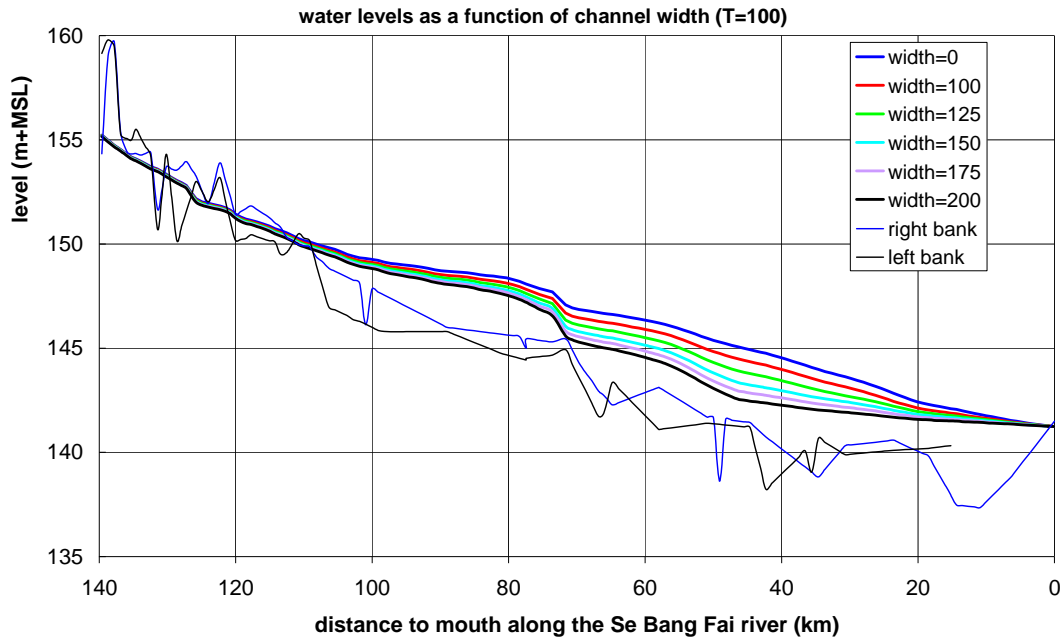

**Figure 5.10:** Water levels in the Xe Bangfai with diversion canal of various width and without a diversion canal.

## 5.5 Future agricultural development

Irrigation development in the project area should be seen as independent activity, there is no linkage between the flood protection measures and irrigation in dry season. Future agricultural development is investigating potential increase cultivated crop area and/or land use change due to the project in a case of

- (i) Flood protection measures only, and
- (ii) Flood protection combined with irrigation development.

In the economic analysis of the IFRM Plan, only the first scenario is taken into account.

Appendix 3 presents a study on socio-economics and agriculture.

### 5.5.1 Staple rice

The main rice season is rain fed, seeded in June and transplanted in July. It is harvested in October or November, depending on the lasting of the raining season. Due to the long raining season, and as harvesting of a majority of the crops are to take place in dry periods, a combination of 2 crops will for sure be possible with additional irrigation.

As mentioned earlier in this report, the first priority of the local farmers is to provide enough rice to their household. As such and as already expressed by the local farmers in public participation sessions, they want to carry on cropping common rice for household consumption in the flood-protected area. This is based on their experiences of farming in a flood prone area and it is part of their risk management strategies. After having secured food, the farmers will consider growing a second crop to generate cash.

At a later stage, when the farmers consider that rice as staple crop can be secured on smaller land surface or by buying it on the market, larger areas for cash crop production will become available.

The farmer's choice to grow a second particular crop will depend on a series of different parameters:

- (i) The proposed cash production must be more productive than the usual sticky rice, in relation to the local limiting factor: labour. The farmer expects a higher earning per working day.
- (ii) The market of that particular crop must be secured.
- (iii) The higher return on investment will have to be demonstrated
- (iv) The required investments must remain within his resources and land exploitation capacities.
- (v) The farmers must have acquired knowledge for growing that particular crop
- (vi) The farmer must have the required capacities to crop and many other parameters that only local farmers perceive as important based on their situation, experience and collective history.

Based on the existing agricultural experience in Lao PDR a number of crops can be envisaged. In terms of agricultural production, the top five crops in Lao PDR in order of importance are rice, vegetables and beans, sugarcane, starchy roots, and tobacco.

Since 1990, among these 5 leading crops, production of vegetables and beans has grown the fastest, followed by sugarcane. In the decade since 1990 rice production has increased 47.9%. Among agricultural products often produced as cash crops are mung-beans, soybeans, peanuts, tobacco, cotton, sugarcane.

This chapter presumes some crops that might have market option in the Lower Xe Bangfai project area. Commercial rice, long cotton and sugarcane have been identified as potential cash crop. The choice was made on the consultant's perception of possible market development, and on the existing Laotian cropping experience.

Considering the efforts of the World Health Organisation to control tobacco, (WHO Framework Convention on Tobacco Control FCTC), intensively growing tobacco in the Lower Xe Bangfai area was not considered as an option in this assessment, even if it was raised during the Public Participation activities, and even if marketing opportunities exist in Savannakhet.

The cropping calendar in Table 5.3 provides an overview of the possible cropping combinations with the rainy seasonal paddy rice grown from July till November.

#### 5.5.2 Commercial rice

Cropping a commercial rice variety would take advantage of growing demand for rice to supply inputs for noodle production and brewing. A pilot programme has been launched in the Khammouane province to promote the cultivation of polished rice, following a study showing that the demand for high-quality products remains high.

Also called "Polished rice", commercial rice attracts a higher price compared to sticky rice, of which the country currently has a surplus. However, not more than 20% of

commercial rice used in Lao factories is produced by local farmers while the rest is imported<sup>10</sup>.

In order to open up and create market for commercial rice, the coordinated chain between farmers, rice purchasing agencies and financial institutions is to be strengthened. Development of contract farming would as such be endeavoured.

During local field visits (July 2009), local farmers have expressed an interest in growing these commercial rice strains, because the study showed that growing commercial rice brings considerably more profit.

### 5.5.3 Sugarcane

A market opportunity for extensively produced sugarcane exist since Khone Kaen Sugar Industry public Ltd , Thailand's fifth largest sugar manufacturer, plans to invest up to Baht 300 mln (about US\$ 86,000) to establish an ethanol production plant in Lao PDR, expanding its investment in the country. The plant, scheduled to begin production in Savannakhet in 2010, is the second phase of the investment in Lao PDR for Khone Kaen Sugar Industry Plc (KSL).

A joint-venture agreement was signed with Ban Pong Inter-trade Ltd (BPI) and the Laotian government to develop a 10,000 ha sugarcane plantation and sugar mill in Savannakhet province. KSL and BPI agreed to establish the Savannakhet Sugar Corporation to execute the project, which is worth around US\$ 11 mln. The company plans to produce 600,000 tonnes of sugarcane over the next four years, but additional sugarcane for KSL's mill will come from other Laotian plantations, operated by firms including Mitr Phol Co, Thailand's largest sugar business, which two years ago invested US\$ 22 mln in a 6,000 ha plantation. KSL will export most of its Laotian output to the EU with some going to local clients, he added.

In Vientiane Municipally, sugarcane is mainly supplied to PakSap Sugar Factory. This is a small factory, but their demand for sugar cane carry on rising. They are still under their maximum processing limit. National wise, the government of Lao imports the sugar from Thailand. This means that, next to the huge KSL ethanol project, the national market for sugar remains an option.

The waste from sugarcane, bagasse, has also the potential to feed the energy production sector using biomass. (Bouathep Malaykham, Ministry of Energy and Mines, Department of Electricity, Brief Report of Biomass in LAO PDR)

### 5.5.4 Cotton

Cotton is most commonly found as an intercrop in Lao, with several hundred square metres of cultivation being sufficient to satisfy the weaving needs of one household. Local cotton varieties yield 200 - 800 kg of seed cotton/ha and have ginning outturns of between 20 and 33%. The short coarse fibres provide a rough-textured cloth for everyday use.

In the south of Lao, farmers sow cotton as an off-season flood-plain crop. Where lowland rice is the major crop, the most common association is groundnut–cotton in order to have a smooth work schedule for farmers. It is not common practice to use organic fertilisers or to apply pest control for cropping cotton in Lao.

---

<sup>10</sup> Study done by Provincial Agriculture and Forestry Department and SNV (Netherlands Development Organisation)

Long fibre cotton has higher economical value than the local short fibre strains. Of all varieties tested in Lao, only S 295 and SRI F4 (cultivated in Chad) and G 31 9-1 6 (Côte d'Ivoire) adapt well to Laotian ecosystems. But the Indian cotton variety G. Hirsutum (known as Kham Khao 1 in Lao PDR) - which is extremely hairy and behaves very well in the field-offers the best results (about 2,500 kg/ha of seed-cotton with intensive crop protection).

Lao PDR has the possibility of opening its rather restrictive national market towards Thailand, and perhaps Vietnam, on condition that it develops production of the medium long fibre varieties demanded by cotton manufacturers.

The current socio-economic climate is favourable for the expansion of cotton cultivation. National and international markets appear to exist and farmers appear to be receptive.

A national coordination of the production appears to be essential to coordinate production input procurement, and purchase of smallholders' harvests. A rural cotton research base and a ginning unit presently exist in Savannakhet

Aiming at the establishment of a sustainable cotton sector, a fair-trade approach might be considered, respecting labour and environment. The international "fair-trade" market is growing.

### 5.5.5 Crop calendar

Most annual crops are planted during the rainy season, starting from June, and harvested in the dry season. Vegetables are mainly cultivated after the rainy season and/or the flood recession period taking advantage of soil moisture after the wet season. See Table 5.3.

**Table 5.3 Possible farming calendar for the Lower Xe Bangfai area**

	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.	Jan.	Feb.	Mar.	Apr.	May
	6	7	8	9	10	11	12	1	2	3	4	5
<b>INTENSIVE CASH CROP</b>												
Rainy Seasonal Paddy rice	█	█	█	█	█	█						
Dry season irrigated paddy rice							█	█	█	█	█	
Suger cane	█	█	█	█	█	█	█	█	█	█	█	█
Rainy season cotton	█	█	█	█	█	█	█	█	█	█	█	█
Dry season cotton							█	█	█	█	█	█
<b>CROP FOR PERSONNAL CONSUMPTION or SMALL CASH</b>												
Onion						█	█	█				
Green Onion						█	█	█	█	█	█	█
Chilly							█	█	█	█		
Corn						█	█	█	█	█	█	█
Dry seasonal tobacco							█	█	█			
Groundnut	█	█	█	█	█	█	█	█	█	█	█	█

### 5.5.6 Future without project

Promoting new crops requires sound thinking and progressive research in on-farm conditions. A new crop cannot be a sustainable answer, especially in term of risks for farmers, but must be considered into existing farming systems, always mixed between many plants and animals productions. Introducing a new cropping system is not

obvious. It is possible only if the farmers take it over. However, the local farmers are risk averting and presently not ready to reduce their staple food cropping, which is wet season rice. Presently, farmers perceive a land-use change as taking risks.

In the project area, there exist several small scale irrigation schemes. Future without project, some irrigation scheme may be improved to increase irrigated area. However, it is assumed that the area increased by new developments would counter balance the existing irrigation scheme deteriorated. Therefore, it is expected that future irrigated area would be the same as current irrigated one.

Future agricultural land use in case of without project would be the same as current land use.

#### 5.5.7 Future with flood protection project

It is expected that the proposed project would remove (i) annual flood damage to agriculture; (ii) flooding constrains on agricultural development in the area. It has a potential for expansion of cultivated area in the wet season and/or replacing short-duration crops by longer-duration ones which generate more benefit.

Under full flood protection for crops, it would be possible to change annual crops (rice, and non-rice crops into perennial crops such as sugarcane if it is more profitable.

Financial and economic net benefit of crops presented in section 2-5 showed that commercial rice has high return compared to other crops in the same cultivated conditions (rain-fed and/or irrigated). Expansion of commercial rice cultivation in the project area would not depend on flood protection measures, but depend on market and production contract between farmer and business. Replacing the rice by sugarcane is not economically justified, since the net benefit from rice (cultivated in wet season) is higher than that from sugarcane (cultivated through the year-round).

In general, flood protection measures can remove the potential flood damages but can not increase cultivated crop area neither in the dry season nor in the wet season, since it is currently full crop cultivation already in the wet season. It is therefore that *agricultural land use in future with flood protection would likely be the same as the agricultural land use in future without project.*

#### 5.5.8 Future with flood protection and irrigation project

As mentioned above, irrigation schemes have been developed for Xaybouly district. There are some small irrigation schemes in Nongbok with irrigated area of 1,880 ha out of 10,355 ha. The potential crop cultivation with new irrigation schemes would increase dry irrigated crop from existing low level to full level of 10,355 ha. Other non-rice crops such as vegetables, corn, beans etc are assumed to be the same as future without project. The cropping intensity in Nongbok district would be increased from 96% to 157%.

In short, future agriculture land use in Nongbok district under flood control and irrigation development would mainly change dry season rice from 1,880 to 10,535 ha. See Table 5.4. However, new irrigation development is independent of flood protection and need to be justified on its own.

**Table 5.4 Future agricultural land use**

Items	Future Without Project		Future With Project	
	Nongbok	Xaybouly	Nongbok	Xaybouly
<b>Gross area</b>	<b>31,300</b>	<b>NA</b>	<b>31,300</b>	<b>NA</b>
<b>Non-agricultural land</b>	<b>17,150</b>	<b>NA</b>	<b>17,150</b>	<b>NA</b>
<b>Agricultural land</b>	<b>14,150</b>	<b>14,500</b>	<b>14,150</b>	<b>14,500</b>
<b>Cultivated crop area</b>	<b>13,794</b>	<b>23,934</b>	<b>13,794</b>	<b>23,934</b>
<b>Cropping intensity</b>	<b>97%</b>	<b>165%</b>	<b>157%</b>	<b>165%</b>
<b>I Wet season cultivated land</b>	<b>10,684</b>	<b>11,772</b>	<b>10,684</b>	<b>11,772</b>
<b>A. Cultivated rice</b>	<b>10,535</b>	<b>8,617</b>	<b>10,535</b>	<b>8,617</b>
1. Staple Rice	5,268	8,617	5,268	8,617
2. Commercial rice	5,267	-	5,267	-
<b>B. Cultivated non-rice</b>	<b>149</b>	<b>3,155</b>	<b>149</b>	<b>3,155</b>
1. Chilly	-	9	-	9
2. Sweet corn	149	80	149	80
3. Sugarcane	-	2,884	-	2,884
4. Other crops	-	182	-	182
<b>II Dry season cultivated land</b>	<b>3,110</b>	<b>12,162</b>	<b>3,110</b>	<b>12,162</b>
<b>A. Cultivated rice</b>	<b>1,880</b>	<b>8,520</b>	<b>10,535</b>	<b>8,520</b>
1. Staple Rice	-	-	-	-
2. Commercial rice	1,880	8,520	10,535	8,520
<b>B. Cultivated non-rice</b>	<b>1,230</b>	<b>3,642</b>	<b>1,230</b>	<b>3,642</b>
1. Tobacco	35	112	35	112
2. Chilly	170	63	170	63
3. Sweet corn	53	94	53	94
4. Sugarcane	-	2,884	-	2,884
5. Other crops	746	489	746	489

Source: Consultant estimates

## 5.6 Preliminary engineering design

Preliminary engineering designs of the main components have been carried out; however no technical field surveys such as topographical surveys and geotechnical investigations have been undertaken. Available maps are outdated; river bank longitudinal profiles have been derived from the river cross sections that appear in the ISIS XBF model.

The Consultant has adopted the preliminary design features as follows:

- (i) Design water levels have been determined with the ISIS XBF model, for design purposes we selected the situation that both the Mekong and the Xe Bangfai river discharges have a probability of exceedance of 1% (1 in 100 years); this selection is based on risk reduction grounds, costs for lower protection levels outweigh the then achievable benefits (with a likely exception for the 1 in 50 years flood events);
- (ii) Crest levels of embankments follow from the river bank elevations and the design water level plus freeboard;
- (iii) Crest width of embankments has been set at 6.00 m;
- (iv) Side slopes for river embankments and the possible diversion canal are taken at 1 : 2.25 (V/H) on average; the slopes should be designed based on the geotechnical characteristics of the earth material available in the area and stability analysis under design water level seepage conditions. The outer slope (river side) of the embankment would likely be in the order of 1 : 1.5 to 1 : 2 and the inner slope (land side) at 1 : 2.5 to 1 : 3;

- (v) Freeboard for river embankments is to be calculated taking into account, wave heights, wind set up, settlement of the embankment after construction, and a surcharge to cover a number of uncertainties in the calculation of the design water levels. These uncertainties are in the field of hydrology and hydraulics (short data time series available), analysis methodologies, quality of the ISIS model etc. At this stage, we have opted for a freeboard of 1.00 m;
- (vi) Fixation of both starting and ending points of a possible diversion canal with reinforced concrete sills and scour protection at both sides of the sill;
- (vii) Borrow areas for soil required for embankments would be acquired under the project and would be either directly from strips of land along the embankment alignment or from elsewhere; from the community consultation that was undertaken it came out that the population prefers to lose as little of their land as possible, indicating that it would be advisable to seek borrow pits not along the alignments but elsewhere;
- (viii) Borrow areas would be excavated to a depth of 3.00 m, which determines the borrow pit area to be expropriated for the project;
- (ix) Land acquisition for river embankments and for the potential diversion canal has been calculated on the basis of the width of the embankments along the river plus 2.00 m for right of way and for the potential diversion canal a strip of 10.00 m between the canal section and the canal embankment wherever the canal is partly in fill.
- (x) Relocation of people and property has to be avoided to the maximum extent by selecting alignments for embankments and the potential diversion canal in such a way that it does not lead to relocation of people or commercial properties; this seems a reasonable assumption since the area is not densely populated;

## 5.7 Cost estimate of works

The cost estimate of works that figure in the proposed IFRM Plan is based on the following assumptions:

- (i) Compacted earth fill in embankments with earth coming from borrow areas at a maximum of 10km haulage distance from borrow pits is priced at US\$ 2.00 per m<sup>3</sup>. This is based on a April 2009 Engineer's Estimate for a major road project in Lao PDR that established unit rates of work items in sufficient detail;
- (ii) Earth excavation and disposal in depot is priced at US\$ 1.50 per m<sup>3</sup> (same source);
- (iii) Rehabilitation or new construction of gates at US\$ 750,000 each;
- (iv) Pump stations at US\$ 300,000 each;
- (v) Feasibility study, including field surveys, at a price of US\$ 1.5 mln if no diversion canal needs to be investigated, otherwise US\$ 2 mln.
- (vi) Surveys and designs of embankments and canal options at US\$ 1.050 per km.
- (vii) Surveys and design of sluice gates and pump stations at 1.5% of the estimated investment cost
- (viii) Contingencies for as yet unknown or unquantifiable work items that will be necessary for example bridges and small but gated culverts, have been taken at 20% of total costs before contingencies

**Table 5.5 Cost estimates for works, without and with diversion canal options**

Item	rate	No Canal		Diversion Canal			
			100m	125m	150m	175m	200m
Earth work (exc and co	2	19.7	17.4	14.9	12.8	11.5	10.2
Earth work (excavator	1.5	-	3.6	5.6	8.1	11.4	15.2
Sill at div canal		-	2.0	2.3	2.5	2.8	3.0
Control gates at drains		3.8	3.8	3.8	3.8	3.8	3.8
Pump stations		2.4	2.4	2.4	2.4	2.4	2.4
Feasibility Study	LS	1.5	2.0	2.0	2.0	2.0	2.0
Survey & design (dyke:	1,050	0.1	0.1	0.1	0.1	0.1	0.1
Survey & Design (Gate:	1.50%	0.1	0.1	0.1	0.1	0.1	0.1
Land acquisition		1.0	1.1	1.0	1.0	0.9	0.9
Relocation cost	PM	-	-	-	-	-	-
Contingencies	20%	5.7	6.5	6.4	6.5	7.0	7.5
<b>TOTAL</b>		<b>34.3</b>	<b>38.8</b>	<b>38.6</b>	<b>39.3</b>	<b>41.9</b>	<b>45.2</b>

## 5.8 Project phasing

For the implementation of the plan it could be sub-divided in a number of projects at provincial or district level and in phases. For project preparation and implementation the embankments could best be split-up in two sections in both provinces (four sections in total). In order to achieve coherence in project preparation, the gates and pumping stations should be an integral part of the embankment projects.



## **6 PUBLIC PARTICIPATION IN PROJECT PREPARATION**

### **6.1 Public Participation strategy**

The objectives of the Public Participation strategy in Stage 2 were:

- (i) Develop Public Participation Plan for the structural flood protection measures demonstration projects to ensure inputs from stakeholders are incorporated in the design and that any potential negative impact on stakeholders is minimized;
- (ii) Prepare Best Practice Guidelines to help the facilitators in conducting Public consultation exercises;
- (iii) Training of NMC and Line Agencies in facilitating public participation during the implementation of the demonstration project.

### **6.2 Public Participation Plan**

A Public Participation Plan for the Lower Xe Bangfai Demonstration Project has been prepared (see Appendix 4). Internal and external stakeholders with an interest in the development of integrated flood risk management plans for the Lower Xe Bangfai area were identified. The following key stakeholders from Line agencies, communities and other organisations were to be consulted:

1. Department of Irrigation
2. Department of hydrology & Meteorology
3. Department of Water Resources
4. National Disaster Management Organization
5. LNMC
6. Department of Land use
7. Water Resource and Environment Research Institute (Newly formed)
8. Department of Water Ways
9. National Disaster Management Committee
10. Social Welfare Council, Takhekh and Nongbok
11. Community at Sok Boe and Hatsai Phong village
12. Water user association vice chief at Tan Theung village

### **6.3 Best practice guideline**

A Best Practice Guideline for Integrated Flood Risk Management, Planning and Impact Evaluation was prepared [5] which discusses the processes and methods involved in public participation and stakeholder consultation.

### **6.4 Training of NMC and Line Agencies in facilitating public participation**

In Lower Xe Bangfai, representatives from LNMC and district Line agencies were trained to facilitate community consultation on getting feedback on structural measures for flood protection. A 'community consultation facilitation guide' was also prepared and translated in Lao language and the Line agencies representatives were trained to facilitate community consultation (see Appendix 5).

## 6.5 Stakeholder consultation

The consultation was done in two days time by four teams consisting of 3 to 4 members each from Line agencies. A total of 16 villages were selected, which accounts for 22% of the 72 villages in Nongbok District. The villages were selected based on the vulnerability characteristics. Since the villages on the Levee are prone to flooding than villages in hinterland, 12 villages on the Levee were selected and the other 4 villages selected were hinterland villages. The consultation helped in validating the assumption regarding benefits and concerns of the communities when the project is implemented.

The Line agencies representative from Nongbok district highlighted the following hazards and problems:

- flood is the main hazard as it damages crops, river bank, roads and irrigation infrastructure;
- the other important problems identified by the Line agencies are marketing agricultural produce, especially Rice and disease outbreak during the floods

The preferred solution according to the Line agencies representatives when the demonstration project can be implemented is:

- (i) Increasing irrigation in the dry season in order to increase area under cultivation and provide economic benefit to the farmers followed by:
- (ii) Construction of flood protection embankment along the right bank of Lower Xe Bangfai River together with adequate drainage and pumping.

If structural measures are not implemented due to lack of funding, the Line agencies representatives would want to see:

- (i) Improvement in the existing irrigation infrastructure.
- (ii) Improvement in access to credit for micro-enterprise development such as pig rearing, and
- (iii) Encouragement for alternative crops like tobacco, vegetables apart from improved rice seeds and marketing support.

### 6.5.1 Feedback from Line agencies

At this stage, the idea of the project is still abstract and hence a very detailed feedback cannot be expected. Despite this, people provided comprehensive feedback which demonstrates their understanding of the problem in the area and a feel for priorities.

The structural measures with flood protection embankments along the right bank of Xe Bangfai river with flood control gates and drainage canals will make the area flood free and hence will protect the village assets like schools, offices, irrigation infrastructure apart from the houses, people and livestock. It will increase livestock grazing area and increase productivity of both livestock and crops as there will be reduction in diseases and better care and management will be possible.

On the negative side, the fear is that it might reduce the amount of fish and hence will affect people who depend on fishing for their livelihoods. Erosion to river bank might increase as the water level in the Xe Bangfai will increase because of the embankment and in the event of a big flood and breach of the embankment, it could cause heavy damage in the area. Some of these concerns could be addressed in the design of the embankment and drainage channel construction.

There could be loss of fertilization effect of the floods, if the area is made completely flood free through polder development. Hence, appropriate agriculture development

should be looked into that will protect and build on soil structure and fertility rather than destroying it due to intensive cultivation.

#### 6.5.2 Feedback from communities

All groups in the 16 villages opted for the Alternative 2, which is construction of embankment along the right bank of Xe Bangfai River with drainage and flood control gates.

In Xe Bangfai, the attitude of the people is to reduce the existing risk and damage of flood and to have a modest improvement in livelihoods opportunities

- (i) Dyke, flood control gates and irrigation system is very important for them to reduce exposure of flood to the agriculture areas.
- (ii) Irrigation system maintenance will become easier and this will reduce the cost of electricity and irrigation.
- (iii) Most of the villages are too close to the Xe Bangfai River and hence they cannot be protected by an embankment, although women would prefer to protect the village as well. The men would want to protect the agriculture land and live with floods in the village for few weeks. However, women demand that all the families in the village have boats, medicine, and safe shelter to move during the floods and remain disease free. They are not prepared to move as they are already on the higher ground.
- (iv) Some villages like Dong Sangam can be protected by embankments and this option should be explored.
- (v) Embankments around the village (small polder) option can be explored. In this case, the embankment should be higher than the embankment that protects agricultural land.
- (vi) Land acquisition for embankment construction is a concern and they would prefer to be compensated with land rather than cash.
- (vii) Impact on fishing and environment was not expressed clearly by the communities. They expressed that the amount of fish might reduce. They are aware of fish migration and breeding and that majority of it takes place in the ponds in the flood plains.

Since the embankment will not protect the village from flooding, as it will be built between the village and the agricultural land on the existing road, it will be important to integrate non-structural measures and create opportunities to increase the number of boats in the village for vulnerable groups to move to neighbouring village with their belongings.

They are ready to participate in the construction of embankment and some are also willing to contribute land if it is a small portion. They are also willing to contribute labour for the construction of the embankment.



## 7 SOCIAL IMPACT

The different structural measures, as presented above have important impacts on the communities.

### Land acquisition and resettlement

The embankments along the Xe Bangfai, and partly the Mekong River, will be constructed or heightened. Because of their relatively elevated position, these river banks are the areas where population is concentrated. Land acquisition and resettlement are important issues in this case. During discussions with the communities, the local population expressed their preference to build the embankments on the location of the present roads. This option will anyhow entail land acquisition of minimum 7 to 8 meter per meter embankment. Construction of a diversion canal will entail additional land acquisition and resettlement, as well as loss of some agricultural area.

### Human health and safety impacts

Overall the project will have a positive impact on human health and safety. People will be better protected against flooding. Floods will last shorter and food (rice) production, and so food security, will increase. This is not the case for the amount of fish available in the flood season, this will greatly reduce. Reduced flushing and dilution of polluted water at the end of the dry season may pose a threat to human health. Reduced flood risk will also reduce the contamination of well, increasing the sanitary conditions.

Construction activities are another threat to health and safety for a variety of reasons: emission of dust, fumes, noise and vibration from construction sites and access roads, increased traffic and workers accidents. Inflow of workers from other areas increases the risk of a spread of HIV/AIDS.

### Socio-economic development

With a reduced flood risk, the overall socio-economic environment and development is expected. Socio-economic development is expected based on the increased agricultural production and the trade of the products.

## 8 INITIAL ENVIRONMENTAL EXAMINATION

Embankment schemes for flood risk management may have considerable impacts on the ecosystems of the flood plains. As described above they sustain the livelihood of the local populations. Appendix 6 presents the results of an initial environmental examination in detail. The potential environmental impacts of structural flood risk management measures can be summarized as follows:

### *Destruction of natural habitats, valuable resources*

- (i) Provision of full flood protection, keeping out the floods, will have a detrimental effect on the wetland habitats, the more so when combined with improved drainage. A large proportion of the wetlands will dry out and the floral species composition will change drastically. This will have a negative impact on the value of these ecosystems as a habitat for wetland dependent fish and birds; they will decrease greatly in numbers or disappear completely. When not flooded anymore, the function of the floodplain as a dry season refuge for 'Black fish' and a wet season fish spawning and nursing area (for both 'Black' and 'White fish') will be lost.
- (ii) Indirect impacts of reduced flooding will also be considerable. Better protection of the area will increase the value of the land for agricultural production and hence will increase the pressure on the presently not-cultivated areas.
- (iii) Other important habitats in the project area are pools and slow water stretches in the river. These are not expected to be affected by the project.

### *Loss of biodiversity, rare and endangered species*

- (i) Reduced flooding will have a significant negative impact on the biodiversity in the area, in number of species as well as in number species' representatives. Species composition of flora and fauna will change and the diversity and extent of water bodies and swamps in the floodplain will decrease.
- (ii) A decrease in number or area of the floodplain lakes, or even a later arrival of the floodwater, results in drying out of the floodplain lakes and ponds or the development of very poor water quality conditions and ultimately in a loss of species like snakehead, mud perch, spiny eels, climbing perch, walking catfish, and gouramies.
- (iii) The survival rate of 'Black fish' in the floodplain will decrease considerably and that lateral migration to spawning and feeding areas in the floodplain will be impossible for 'White fish'.

### *Loss of environmental services*

- (i) Flooding and the related sustenance of wetlands are known to have a number of benefits, these benefits may disappear or decrease if flooding is prevented or diminished.
- (ii) Reduced flooding will reduce the replenishment of groundwater and surface water bodies with flood water. This will affect the wetland ecology, but also the amount of surface and ground water available in the next season. Of importance is also that not only the available quantity will be affected, but also the quality of the water. Pollutant concentrations increase in the course of the dry season and flooding flushes these pollutants out or reduces the concentrations to harmless levels. Reduced flooding will result in a deterioration of the water quality in the area.

### *Impact on Fisheries*

- (i) As described before, reduced flooding of the floodplains will have a significant negative impact on fish stocks, both in the floodplain itself and in the river.





## 9 COST BENEFIT ANALYSIS

### 9.1 Project costs

The project cost estimate and the assumptions made are presented in Section 5.7 and are summarized in t

**Table 9.1 Cost estimates for works, without and with diversion canal options**

Item	rate	No Canal		Diversion Canal			
			100m	125m	150m	175m	200m
Earth work (exc and cc	2	19.7	17.4	14.9	12.8	11.5	10.2
Earth work (excavator	1.5	-	3.6	5.6	8.1	11.4	15.2
Sill at div canal		-	2.0	2.3	2.5	2.8	3.0
Control gates at drains		3.8	3.8	3.8	3.8	3.8	3.8
Pump stations		2.4	2.4	2.4	2.4	2.4	2.4
Feasibility Study	LS	1.5	2.0	2.0	2.0	2.0	2.0
Survey & design (dyke:	1,050	0.1	0.1	0.1	0.1	0.1	0.1
Survey & Design (Gate:	1.50%	0.1	0.1	0.1	0.1	0.1	0.1
Land acquisition		1.0	1.1	1.0	1.0	0.9	0.9
Relocation cost	PM	-	-	-	-	-	-
Contingencies	20%	5.7	6.5	6.4	6.5	7.0	7.5
<b>TOTAL</b>		<b>34.3</b>	<b>38.8</b>	<b>38.6</b>	<b>39.3</b>	<b>41.9</b>	<b>45.2</b>

### 9.2 Project benefits

#### 9.2.1 Flood risk reduction

From the Flood risk assessment (See section3.6) for Nongbok district the flood risk for the entire flood prone areas have been extrapolated, the resulting total flood risk are presented in **Error! Reference source not found.**

**Table 9.2 Flood risk in Nongbok District and total risk in the whole flood prone area**

Expected damage reduction (M US\$/year) for Nongbok district				Expected damage reduction (M US\$/year) for whole flood prone area				
P(%)	Infrastructure	Housing	Agriculture	P(%)	Infrastructure	Housing	Agriculture	Total
1%	0.36	0.01	2.58	1%	0.75	0.03	5.36	6.14
4%	0.31	0.01	2.24	4%	0.67	0.02	4.74	5.43
10%	0.25	0.01	1.74	10%	0.54	0.00	0.00	0.54
50%	0.08	0.00	0.47	50%	0.18	0.00	1.08	1.27

#### 9.2.2 Agricultural benefits

There would be no incremental net benefit from crop cultivation due to the proposed IFRM Plan. Though development potential for irrigation systems exist, these would be independent of flood protection measures and should therefore be economically feasible on their own.

### 9.3 Reduction of flood benefits

#### 9.3.1 Impact on fisheries

Under the controlled-flood conditions, the natural fish production will be reduced. It is presently extremely difficult to quantify the impact of the structural measures on the natural fish production. Under full-flood protection it might drastically be reduced.

In order to mitigate the impact of floodplain reduction, institutional agreements on accepting controlled flooding in the area, water levels in the natural reservoirs, protected spawning zones and period could be negotiated and enforced.

The loss of fish production in the area could be compensated by intensive aquaculture.

#### 9.3.2 Other ecosystem services and goods

Supply of other ecosystem service and goods, such as timber, might be reduced by the structural measures and the related flood reduction. For the time-being no exhaustive identification of the different services and good contributing directly or indirectly to the livelihoods of the communities living in the immediate or extended neighbourhood of the flood-plain ecosystems has taken place. Additionally, very little is known about the contribution to the community's cash and non-cash livelihood.

**Table 9.3 Categories of ecosystem services and goods**

<b>Supply services</b>	<b>Regulation services</b>	<b>Cultural services</b>	<b>Support services</b>
food, water, wood, fibres, medicinal resources	climate, flood, diseases water quality	spiritual (sacred springs and forests), aesthetical and recreational benefits	soil formation, pollination and nutrient cycle

Supplementary research is required to conclude on this issue and to propose mitigation actions. For example, very little is known about the impact of flood on diseases and pest control, on the soil formation, on the groundwater level and groundwater quality, on sustaining the local biodiversity providing pollination services.

Qualitatively, one can expect that with the flood reduction and the related reduction of the ecosystems (in surface and in biodiversity), particular services and good will diminish or even disappear (production of natural fibres such as long grasses and timber, access to natural medicinal healing products, diseases and pest control, soil formation).

The loss of these services and goods will have to be replaced by artificial measures that will have to be bought on the market.

#### 9.3.3 Water supply and sanitation

Except for the district town, which has its water treatment and supply grid, the rural water users extract water from wells or straight from the river. This water is not treated before consumption.

The impact of a flood reduction on the ground water level and ground water quality is un-known.

The flood-reduction will reduce the overflow of the pit latrines. This will reduce the contamination of wells and the spread of diseases during flood periods

#### **9.4 Economic analysis**

First a cost benefit analysis was performed on the basis of annuities of flood risk reduction benefits and costs, this resulted in B/C ratios smaller than 1 for high probabilities of exceedance but larger than 1 for the lower probabilities of 1% and 2%.

We therefore have selected the 1 in 100 year protection level in a cash flow calculation with the following assumptions on the cost side:

- construction takes place in five years with a distribution of the investment of 10%, 25%, 30%, 25% and 10% respectively;
- annual O&M at 2.5% of investment;
- replacement of electromechanical equipment (pumps and gates) after 15 years;
- a Standard Conversion Factor of 0.85 to arrive at the economic price of the works (removing transfer payments like taxes, subsidies, land acquisition; and shadow prices);
- a discounting rate of 10% for the calculation of the Net Present Value (NPV) over a period of 30 years.

At the benefit side, we have assumed that 50% of the risk reduction is achieved after implementation of the first phase from year three and achieves its full potential in year five.

The resulting economic internal rate of return of the project amounts to 19.9%, the Net Present Value is estimated at US\$ 17.9 mln.

We have tested the economic feasibility of the inclusion of a diversion canal, to find optimum canal dimensions. We have varied the width of the canal, starting with a bottom width of 100 m and bottom level of 140 m amsl, in steps of 25 m up to a canal with 200 m bottom width and invert of 136 m amsl. This was simulated in the ISIS XBF model in all cases with embankments along the river. The economic optimum for the canal appears to be 125 m bottom width and invert of 139 m amsl. The total costs however would increase to US\$ 38.6 mln as compared to the situation without a diversion canal; the EIRR is calculated at 17.3%.

In view of the preliminary nature of the engineering of the works, the above figures rather present an order of magnitude, a feasibility study with field surveys etc, is needed to estimate the works more precisely and to confirm the economic analysis.



## 10

**INSTITUTIONAL DEVELOPMENT****10.1 Present situation**

Appendix 8 presents the administrative levels in the water sector in Lao PDR. A description of their water related responsibilities is presented in Table 10.1.

**Table 10.1 Lao PDR-Institutional Tasks, Responsibilities, Activities, Mandate-**

<b>Institution</b>	<b>Water-related responsibilities</b>
Lao National Mekong Committee	<ul style="list-style-type: none"> <li>• Advise the Lao representative to the MRC Council on all matters relating to activities within the Mekong River Basin that could affect Lao interests;</li> <li>• review proposals prepared by Lao agencies in the light of the Mekong Agreement;</li> <li>• provide coordination between MRC and concerned ministries of Lao Govt.</li> </ul>
Water Resources and Environment Administration (WREA)	<ul style="list-style-type: none"> <li>• Define policies and develop strategies for water resources;</li> <li>• research and investigations of water resources;</li> <li>• prepare plans for water resources development and conservation;</li> <li>• flood forecasting and warning;</li> <li>• manage direct and indirect water resource use;</li> <li>• collect and manage data and information about surface water, groundwater, and meteorology;</li> <li>• administer international collaboration, including that within the Mekong River Basin (hosts Lao NMC);</li> <li>• Protection of natural resources and environmental quality from degradation;</li> <li>• water quality monitoring and pollution control, including monitoring wastewater discharges and issuing permits</li> <li>• disseminate water-related information;</li> </ul>
Water Resources Coordination Committee	<ul style="list-style-type: none"> <li>• coordinate national water resources utilization</li> <li>• develop a new national water resources strategy</li> <li>• drafting of River Basin Profiles</li> <li>• advice on/general review of the Law on Water &amp; Water Resources (LWRR) and the Decree on Implementation of the LWRR</li> <li>• advice on the set-up of River Basin Organizations;</li> <li>• provide technical advice on relevant issues;</li> </ul>
Ministry of Energy and Mines (MEM)	<p>Water-related responsibilities include:</p> <ul style="list-style-type: none"> <li>• planning hydropower development;</li> <li>• administration of single-purpose schemes for hydro-power</li> <li>• planning industrial water use;</li> </ul>
Ministry of Public Works and Transport (MPWT), including - Dept. of Housing & Urban Planning - Road Dept.; - Waterways Dept.;	<p>Water-related responsibilities include:</p> <ul style="list-style-type: none"> <li>• urban drainage and sewerage systems;</li> <li>• partial role in flood management/bank protection works;</li> <li>• study, survey and construction of river works for navigation and water transport;</li> <li>• monitoring hydrography, hydrology and hydraulics along Mekong mainstream and major tributaries;</li> <li>• construction of roads, interaction roads and floods in floodplains and flood prone areas</li> <li>• domestic water supply and urban sanitation;</li> </ul>

<b>Institution</b>	<b>Water-related responsibilities</b>
Ministry of Agriculture and Forestry (MAF)	Water-related responsibilities include: <ul style="list-style-type: none"> <li>• planning &amp; implementation of irrigation, drainage and rural flood control;</li> <li>• develop policies and strategies for agriculture, forestry and fisheries related to the management of water resources;</li> <li>• watershed management; reforestation, manage forests,</li> <li>• fisheries-related impacts of regulation and other interventions</li> </ul>
Ministry of Finance (MoF)	MoF is responsible for the national budget and the Public Investment Programme. Water-related investments can be proposed by various ministries/departments, and MoF has the role of harmonising proposals, and matching them against the national investment priorities.
Ministry of Planning and Investment	National 5-years socio-economic development plans; overall national planning and coordination;
Ministry of Health	Health related issues of water resources development, water supply and sanitation; health related impacts of floods and other disasters
National Land Management Authority	Responsible for land-use planning, land title registration and (urban) master planning. No flood mapping and/or flood risk management
Ministry of Labour and Social Welfare/ National Disaster Management Commission/Office (NDMC/NDMO)	<ul style="list-style-type: none"> <li>• improve disaster/flood preparedness;</li> <li>• provide disaster/flood relief;</li> <li>• provide disaster/flood early warning</li> <li>• emergency response planning;</li> <li>• collection of flood damage data/info;</li> <li>• increase public awareness;</li> <li>• centre for DM information &amp; training;</li> </ul>
Lao Red Cross	<ul style="list-style-type: none"> <li>• provide disaster/flood preparedness;</li> <li>• provide disaster/flood relief;</li> <li>• provide disaster/flood early warning</li> <li>• collection of flood damage data/info;</li> </ul>
Municipalities, viz. Vientiane	Large municipalities are responsible for drainage and sewerage within their area of jurisdiction. Example: Vientiane Urban Drainage Administration (VUDA).
Development committees	Development committees at provincial, district and village levels have responsibility for socio-economic development initiatives. In some, water-related initiatives may be included, particularly with regard to water supply and sanitation
<i>Note: Some management and planning functions are made in collaboration between several agencies, each supplying expertise and data</i>	
<i>All ministries are involved in awareness-building and HRD</i>	

Water users Associations (WuA) have organised themselves around the irrigation schemes to manage the water input and the pumping stations. It appears that these institutions are too weak in terms of capacities at the moment because most of the stations are in poor working conditions.

In the area, wetlands and wetland fisheries are managed by communities to conserve these ecosystems, to maximize the productivity of the associated fisheries, and to ensure that all members of these communities share the benefits obtained from these management systems. These systems of community wetland and fisheries management

in the floodplains of the Xe Bangfai basin are diverse. It should be noted that even within these systems there are various wetland microhabitats that are managed and used in different ways depending on environmental and social conditions. The full variety of management systems being utilized by communities in the Xe Bangfai basin cannot possibly be described here.

## 10.2 Development

### 10.2.1 Strategy and Policy setting

Before project conceptualisation, societal choices are to be defined, and tradeoffs are to be negotiated amongst the different stakeholders, with the “two ends of the cable”-knowledge of decision impacts. To the consultants knowledge no clear societal choices translated in development policy strategy for the area have been formulated yet.

This report shows there is still known about the multiple assumed impacts of the infrastructural measures on environment and society. Much more research is required to identify the different interrelationships between the environment and the different communities in the Xe Bangfai and in the Mekong basin as a whole.

The proposals as they have been presented suppose societal choices to sacrifice inland fish stock and other flood-dependant ecosystem services and goods for the benefits of agriculture. Local population might not fully agree with this extreme approach. Negotiated intermediate, more creative solutions might need to be developed in order to achieve more win-win conditions. A win-win situation could be achieved by optimizing not only agricultural land use, but also the existing inland water bodies. To do so, embanking the inland water bodies and the little rivers connecting them to the Xe Bangfai and the Mekong could create inland water storage reservoirs for dry season irrigation and fisheries. This is a societal choice that could be made.

For the time being, one can conclude that the project results endeavoured by the 2 proposals have not yet been identified and quantified, mainly because of the weak and incomplete knowledge of the possible impacts of the project.

Participation of the local stakeholder in the decision making process and planning is one of the milestones in IWRM. The consultant can't conclude on the level of participation for the 2 proposals developed in this document.

### 10.2.2 Management of infrastructure

For risk reduction in the lower Xe Bangfai, 2 projects of creating polders in the area have been proposed. Even if not explicitly mentioned in the proposals, the management of the structural measures suppose that the yearly flood will be controlled and avoided, with gates and pumping stations. This means that the situation will evolve from a naturally imposed and undergone flood, towards a flood-free situation, managed with a drainage system. Contradictory interests between land-users will as such for sure enter into conflict, which can escalate to important social conflicts.

As the flood will be controlled through structural measures, the following questions ought to be addressed:

- *“When should the water recession starts?”*
- *“When will the yearly artificial drainage period start (with pumping stations)?”*
- *“What are acceptable water levels in the area?”*
- *“At which pace should the water recession occur?”*
- *“How will it be managed and financed?”*

- “By whom?”

These aspects stress the importance of an Integrated Management considering the different water-, land- and environment-uses, and of the institutional development that ought to go hand in hand with the construction of the structural measures.

In order to get a feeling of the different benefits and losses caused by the structural measures, it is advised to simulate the different productions in the area under the new conditions, (different agricultural crops, fish, wood, ...), together with the real stakeholders in functions of the different decisions taken regarding the flood occurrences and recessions. This will allow the local stakeholders to experience all benefits and losses.

It allows as well simulating particular institutional arrangement that can reduce certain impacts. Respecting agreements related to controlled-flooding, water inlet in natural reservoirs, protected spawning areas and periods and the use of adequate fishing gear with large-mesh, can for example reduce the loss of fish stock due to flood reduction.

IWRM supposes a participation and collaboration of different stakeholders to undertake collective actions, aiming at a collective goal. Therefore, trust, based on previous collaboration experiences between the different actors, is to be reinforced and consolidated. It is a partnership for a collective action that is to be established. The building of the partnership starts at the conceptualising stage. At this early stage it is important to identify for all the stakeholders what the costs and benefits are to them to participate in the collective action.

The consultant stresses this aspect because weak institutional experience in stakeholder participation is often a cause for the overestimation of the local stakeholders' buying-in and appropriation of the project. Participation of the local stakeholders is crucial for the project sustainability.

From the existence of local Water Users Association, presently managing the dying irrigation schemes, it appears that the project area already has experience in participative management. However, their institutional capacity appears to be insufficient. This is partially demonstrated by the non-sustainable exploitation and management of the existing irrigation schemes.

### 10.2.3 Agricultural extension services

As identified in different sections in this report, a qualitative extension service is a precondition for the successful land-use change to cropping commercial cash-crops.

Knowledge and capacity building will be required in:

1. Production practices such as pest control, nutrient management, water management
2. Agriculture marketing and contract negotiation, including provision of market information, production planning, distribution and sale.



## **11 TERMS OF REFERENCE FEASIBILITY STUDY FOR PHASE 1**

Since the results of the analysis of the IFRM Plan are positive and it is likely that donors could be interested in the plan a Feasibility Study for the first Phase of the proposed plan is required,

The Terms of Reference will be prepared after reaching agreement on the findings of this draft plan and the selection of the preferred phasing for the implementation of the plan by Working Group for the Demonstration Project



**12**

**REFERENCES**

1. Stage 1 Evaluation report, Main report, Flood Management and Mitigation Programme Component 2: Structural Measures and Flood Proofing, September 2008
2. Flood Hazards in the Focal areas, Annex 1 to Stage 1 Evaluation report, The Flood Management and Mitigation Programme Component 2: Structural Measures and Flood Proofing, August 2008
3. Roads and Floods, Best Practice Guidelines for the Integrated Planning and Design of Economically Sound and Environmentally Friendly Roads in the Mekong Floodplains of Cambodia and Viet Nam, October 2008; The Flood Management and Mitigation Programme Component 2: Structural Measures and Flood Proofing
4. A survey on environmental and health effects of agrochemical use in rice production, Mary Chamroeun, Vann Kiet, and Sun Votthy, 2001.
5. Best Practice Guidelines for Integrated Flood Risk Management, Planning and Impact Evaluation, The Flood Management and Mitigation Programme Component 2: Structural Measures and Flood Proofing, June 2009
6. Best Practise Guidelines for Flood Risk Assessment in the Lower Mekong Basin, The Flood Management and Mitigation Programme Component 2: Structural Measures and Flood Proofing, April 2009



Prepared for:

Mekong River Commission

## Appendix 1

# Flood hazard assessment for Se Bangfai

Combined flood approach

Henk Ogink, Sopharith Tess and Ferdinand Diermanse

Report

December 2009

## Contents

<b>1</b>	<b>Introduction.....</b>	<b>1-1</b>
<b>2</b>	<b>Flood hazard assessment for combined floods .....</b>	<b>2-1</b>
	2.1 General.....	2-1
	2.2 Outline of procedure .....	2-1
<b>3</b>	<b>Basin description.....</b>	<b>3-1</b>
	3.1 General.....	3-1
	3.2 Basin description .....	3-1
	3.3 Problem description .....	3-3
	3.4 Hydrological network and data availability .....	3-7
	3.5 Hydrological characteristics .....	3-10
	3.5.1 Rainfall .....	3-10
	3.5.2 Evaporation.....	3-11
	3.5.3 Runoff.....	3-12
<b>4</b>	<b>Hydraulic model.....</b>	<b>4-15</b>
	4.1 General.....	4-15
	4.2 Schematization.....	4-15
	4.3 Boundary conditions .....	4-19
	4.3.1 General.....	4-19
	4.3.2 Discharge at Mahaxai .....	4-19
	4.3.3 Lateral inflow.....	4-20
	4.3.4 Discharge at Nakhon Phanom.....	4-22
	4.3.5 Stage-discharge relation at Mukhdahan.....	4-25
	4.4 Model performance test .....	4-27
<b>5</b>	<b>Hydrological hazard assessment.....</b>	<b>5-33</b>
	5.1 General.....	5-33
	5.2 Peak discharge and flood volume Se Bangfai at Mahaxai.....	5-33
	5.3 Peak discharge and flood volume Mekong at Nakhon Phanom .....	5-36
	5.4 Se Bangfai-Mekong correlation.....	5-40
<b>6</b>	<b>Flood hazard assessment .....</b>	<b>6-1</b>
	6.1 General.....	6-1
	6.2 Applied boundary conditions.....	6-1
	6.3 Simulation results .....	6-2
	6.3.1 Cases.....	6-2

6.3.2	Water levels in the Se Bangfai river .....	6-2
6.3.3	Water levels in the floodplains.....	6-8
6.4	Flood hazard determination .....	6-10
6.5	Bypass canal .....	6-15
6.5.1	Introduction.....	6-15
6.5.2	Simulations for the years 1995 until 2000.....	6-16
6.5.3	Probabilistic analysis for the diversion channel .....	6-22
6.6	Effects of varying bottom levels in the Mekong river .....	6-25
<b>7</b>	<b>Conclusions and recommendations .....</b>	<b>7-1</b>
7.1	Conclusions.....	7-1
7.2	Recommendations.....	7-3
<b>8</b>	<b>Literature.....</b>	<b>8-1</b>

# 1 Introduction

This Report deals with flood hazard assessment for combined floods in the Lower Se Bangfai. Combined floods refer to flooding in the downstream parts of tributaries in the vicinity of the Mekong caused by large discharges from the tributaries backed up by high water levels in the Mekong. The general procedure used in such cases is presented and its application to the Se Bangfai is discussed.

The set up of this Report is as follows. The procedure for flood hazard assessment for combined floods is outlined in Chapter 2. A description of the Se Bangfai basin, its hydraulic infrastructure, hydrological monitoring system and data availability is given in Chapter 3. The hydraulic model used for the simulation of the floods in the Se Bangfai basin, the river and flood plain schematization and applied boundary conditions are presented in Chapter 4. The hydrological hazard assessment is dealt with in Chapter 5, followed by the results of the simulations and of the flood hazard assessment in Chapter 6. Conclusions on the computations and analyses are drawn in Chapter 7 with recommendations on the application of this procedure for other areas.



## 2 Flood hazard assessment for combined floods

### 2.1 General

The procedure for flood hazard assessment in case of combined floods is discussed in this chapter. It deals with the creation of flood levels and flood extent of selected return periods as well as flooding depth and duration. Subsequently, flooding depth and duration are combined with land use information to determine the losses and benefits (social, environmental and economic) of the flooding, which is discussed in a separate volume.

### 2.2 Outline of procedure

The procedure applied to assess the flood hazard uses the Monte Carlo sampling technique to derive exceedance probabilities of water levels and damages. The procedure uses three random variables, representing the main causes for high water levels in the downstream part of the Se Bangfai catchment:

- the maximum discharge in the Mekong river at Nakhon Phanom, near the Se Bangfai river mouth at That Phanom;
- the total volume of the flow in the Mekong river at Nakhon Phanom, and
- the total volume of the flow in the Se Bangfai river at Mahaxai.

For each of the three random variables, samples are taken from their respective probability distribution functions. This procedure is repeated  $N$  times (with  $N$  sufficiently large) to obtain  $N$  combinations of possible realisations of the three random variables. This can be considered as a synthetic series of  $N$  years, where each sampled combination of random variables describes the main hydraulic features of the flood season in a single year.

For each combination/year the hydraulic model of the lower Se Bangfai based on ISIS is applied to derive the relevant hydraulic features like maximum water level at a number of locations in the Se Bangfai area. Formally, this means that the hydraulic model should run  $N$  times, but since  $N$  is generally quit large (100,000 in this case) that would require such a long computation time that the procedure would become unpractical. Instead, the hydraulic model is run for 90 different combinations of the three random variables that basically cover the whole spectre of possible outcomes. The results of the 90 simulations are stored in a database. Results of the  $N$  Monte Carlo runs are then determined by interpolation of the results of the 90 simulations. Since 3 random variables are involved, the interpolation is 3-dimensional.

The procedure above results in relevant hydraulic features at a number of locations in the Se Bangfai area. Based on economic analysis it is also possible to estimate the damage for each simulated year. The next step is to derive the probability of exceedance of threshold values

of the damage. For Monte Carlo techniques this is a relatively straightforward procedure. Suppose the threshold damage  $D^1$  is exceeded in 100 out of  $N$  simulations, the estimated probability of exceedance of  $D^1$  is equal to  $100/N$ . Similarly, if another threshold value  $D^2 > D^1$  is exceeded in 10 out of  $N$  simulations, the estimated probability of exceedance of  $D^2$  is equal to  $10/N$ . Repeating this procedure for a range of threshold values provides a relation between damage on one hand and exceedance probability on the other hand. Figure 2.1 gives an example of what such a relation might look like.

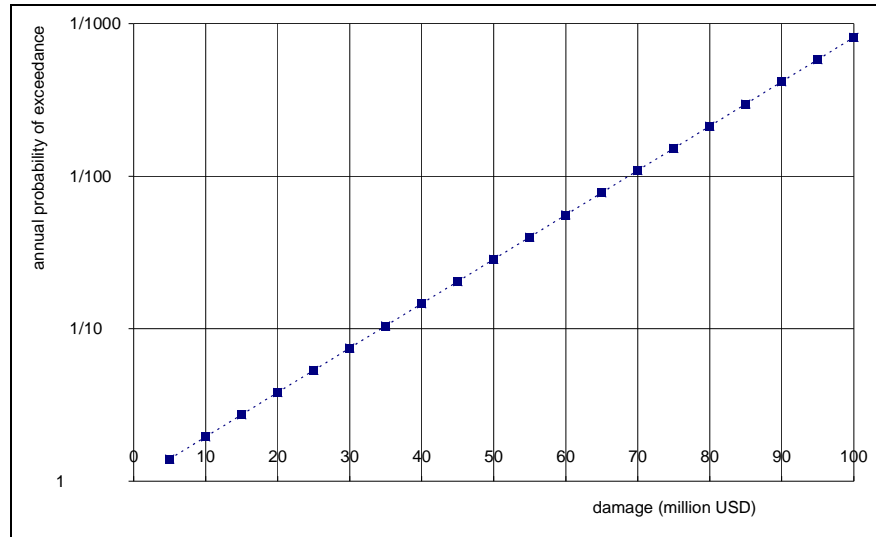


Figure 2.1 Hypothetic relation between damage and annual probability of exceedance

The last step in the procedure is to derive the  $T$ -year flood event. Using damage as the criterion, the  $T$ -year flood event is defined as:

*“The threshold damage  $D_T$  which has a probability of exceedance of  $p=1/T$  per year”*

The availability of a relation as shown Figure 2.1 enables the determination of the  $T$ -year flood, i.e. the  $T$ -year damage. For example the 100-year damage  $D_{100}$  can simply be derived by checking where the dotted line crosses the horizontal threshold of  $p=1/100$ . In the example of Figure 2.1 this occurs at around 70 million USD, so  $D_{100} = 70$  million USD.

Notes:

- Instead of damages also other criteria can be defined to derive the  $T$ -year flood, such as the maximum water level. In that case one needs to derive the water level that has an annual exceedance probability of  $1/T$ . The same procedure as above can be applied, i.e. exceedance probabilities for a range of threshold water levels need to be derived.
- The procedure needs to be applied separately for each location in the area in which one is interested. This is because the relation between the three random variables on the one hand and the resulting maximum water level or damage on the other hand may vary significantly from one location to the other.

## 3 Basin description

### 3.1 General

The Se Bangfai has been selected by LNMC as focal area for IFRM (Integrated Flood Risk management) in areas with combined floods, i.e. flood levels in tributaries affected by backwater from Mekong.

### 3.2 Basin description

The Se Bangfai takes its rise in the Annamite mountain range near to the border with Vietnam west of Thakek and joins the Mekong at rkm 1,166, opposite of the city of That Phanom in Thailand. The river drains an area of 10,240 km<sup>2</sup>. On its rise it is joined by the Nam Phanang, Nam Hue with major tributary Nam In, Nam Gnom or Nam Kathang, and just upstream of Mahaxai by Nam Phit. Downstream of Mahaxai the river Nam Oula and finally the largest tributary Se Noy, with its headwaters Nam Meng and Se Bay, discharges to the river. The Se Noy drains upstream of station Ban Se Bangfai/Highway Bridge 13S. The upper basin is steep, but below Mahaxai the river slopes are small and the reach from 10 km downstream of Mahaxai to the mouth is affected by backwater from the Mekong (Figure 3.1 and Figure 3.2). The strongly meandering Se Bangfai near the confluence opposite That Phanom is shown in Figure 3.3.

At Mahaxai the Se Bangfai drains an area of 4,520 km<sup>2</sup> or about 44% of the basin. At station Ban Se Bangfai or Highway Bridge 13S the upstream drainage area amounts 8,560 km<sup>2</sup>, which is 84% of the basin.

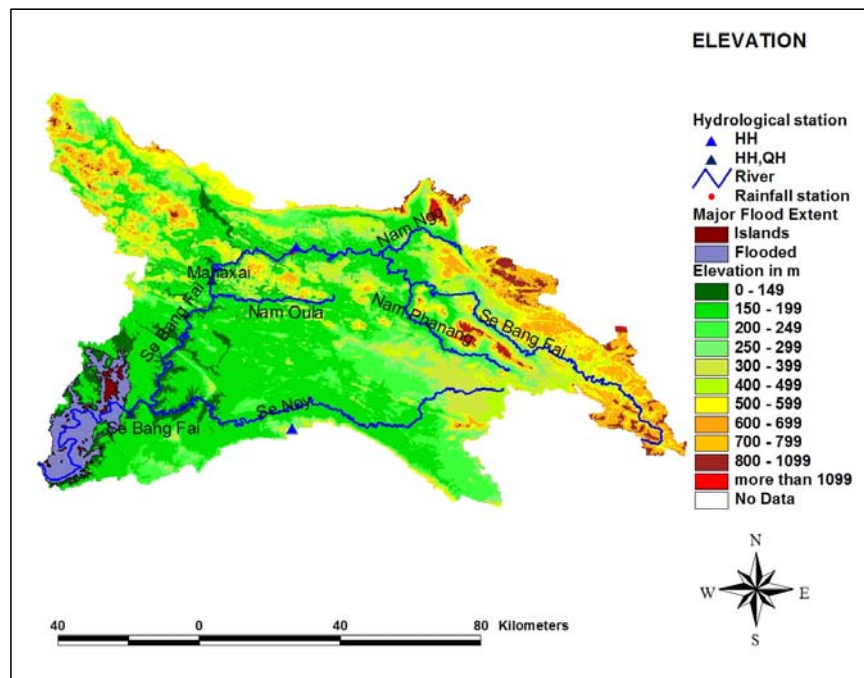


Figure 3.1 Elevation map of Se Bangfai basin

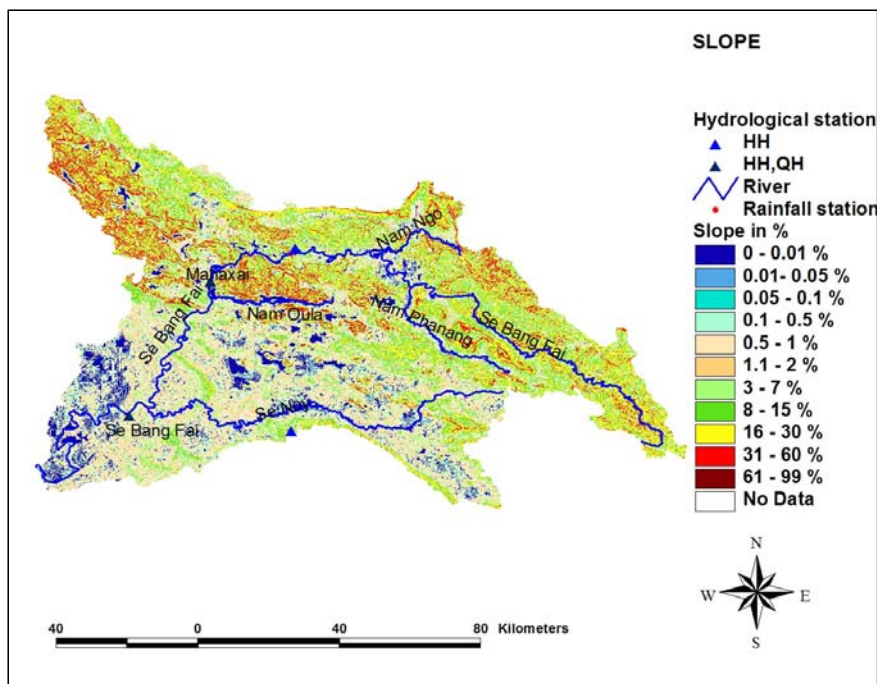


Figure 3.2 Se Bangfai slope map



Figure 3.3 Confluence of Se Bangfai with Mekong opposite That Phanom

In December 2009 the Nam Theun 2 Hydro-electric Project will be put in operation (ADB, 2004). The Project will dam the Nam Theun near Ban Sop Hia in Khammouane Province and its average annual flow of 220 m<sup>3</sup>/s will be diverted to the Se Bangfai. The Nam Theun water will be stored in the Nakai reservoir with a total capacity of 3.91 BCM. Water from the reservoir will drop about 350 m through a tunnel to a power station located at the base of the Nakai escarpment. From here the water will flow into an 8 MCM regulating pond controlled by the Regulating Dam (see Figure 3.4). From this dam water flows towards the Se Bangfai mainly via a 27 km Downstream Channel, which lower tail combines with the

Nam Pith, and a small part is discharged to the Nam Kathang at a rate equivalent to the current natural flow. The planned variation in the release from the Regulating Dam is between 315 and 60 m<sup>3</sup>/s on week-days and a constant 60-75 m<sup>3</sup>/s on Sundays. As can be observed from Figure 3.4, the inflows from Nam Theun take place upstream of Mahaxai.

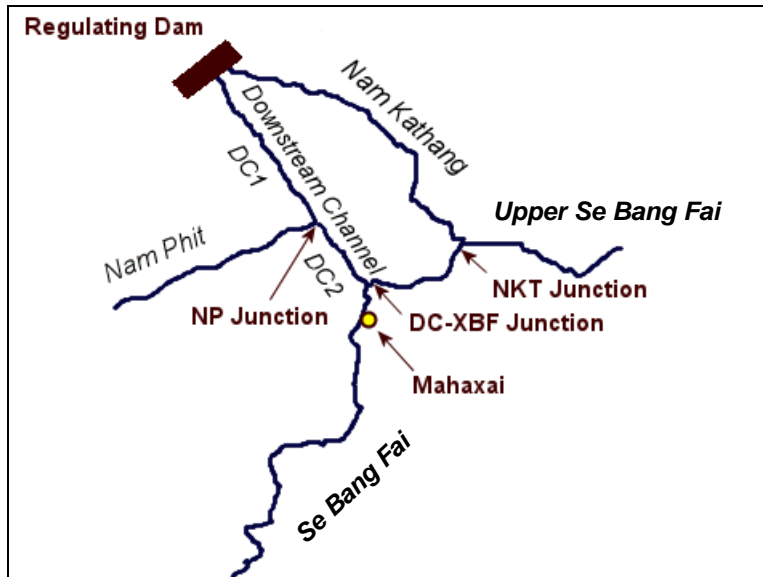


Figure 3.4 Schematic layout of trans-basin diversion from Nam Theun to Se Bangfai

### 3.3 Problem description

Se Bangfai river and flood plains near the confluence with Mekong are shown in Figure 3.5 and Figure 3.6. Flooding takes place in the districts Thakek, Nong Bok, Se Bangfai and Mahaxai. Major flooding takes place between the Mekong and Highway 13S, north of Se Bangfai river (see Figure 3.7). Lowest areas are 140 masl, whereas Nongbok village is flood free at an elevation of 150 masl. Flooding here lasts several months.



Figure 3.5 Se Bangfai at Nong Bok, looking upstream; left bank is in Savannakhet Province





Figure 3.6 Areas east of Nong Bok severely flooded in wet season, with flood mark on concrete pile

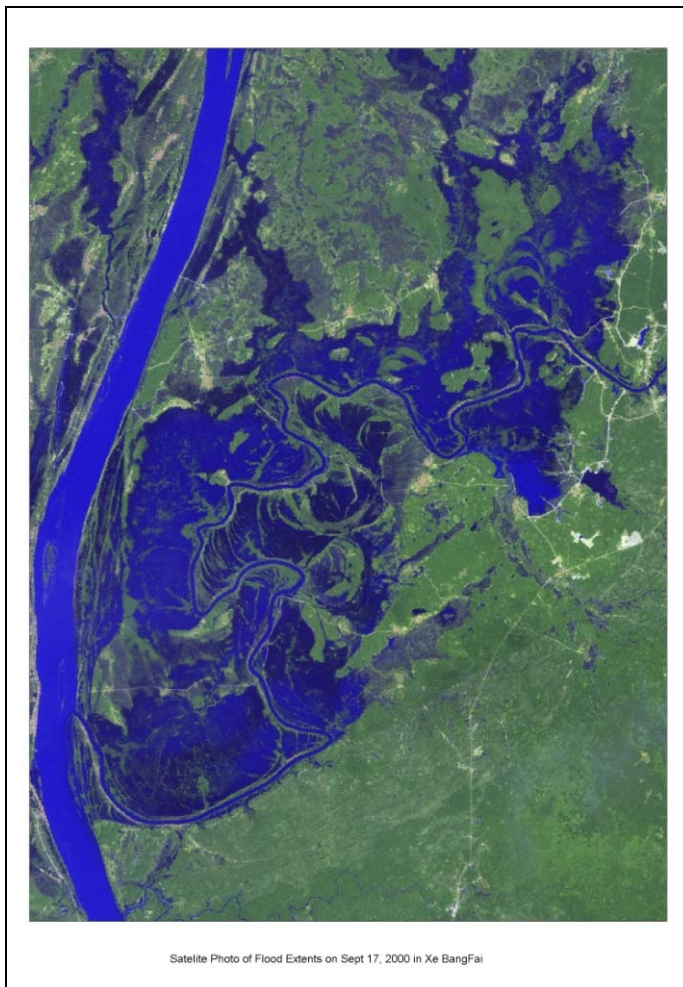


Figure 3.7 Extend of flooding along lower Se Bangfai and Mekong in year 2000

Apart from the area along the lower Se Bangfai there is also one smaller area in Mahaxai District facing floods according to local information. This area is located near Road 1F between Mahaxai and Nam Oula, and is flooded each year during about one week.

To reduce the flood risk in Savannakhet Province, i.e. along the left bank of Se Bangfai, flood protection in the form of a dike is already in place. For Khammouane Province (along the right bank of Se Bangfai) the following options are being studied:

1. Construction of mini-polders and construction of dikes along Se Bangfai and Mekong
2. Construction of a bypass canal “Xelat” from Sokbo to Bungsan Nua in Nongbok District to the Mekong,
3. Construction of a regulating dam at the junction of the Se Noy with Se Bangfai.

For Option 1 a number of cases have been distinguished:

- Construction of mini-polders at 3 locations protecting in total 1,470 ha of land in Mahaxai and Se Banfai districts, involving dikes with a total length of 18.94 km (estimated cost USD 2.2 million)
- Step-wise construction of dikes along the lower Se Banfai and Mekong (estimated total cost USD 30.9 million) as follows (see Figure 3.8):
  - Step 1: 27 km long dike with crest at 148.0 m from Nongbone to Sokbo, protecting 9,700 ha of land including 26 villages
  - Step 2: 36 km long dike with crest at 146.0 m from Sokbo to Bungsanetha, protecting 4,000 ha of land and 17 villages, and
  - Step 3: 30 km long dike with crest at 145.7 m from Tantheung to Danepakse, protecting 3,000 ha of land and 13 villages.
- One-step construction of a 65 km long dike along the right bank of Se Bangfai River only from Nongbone to Danpakse (estimated cost USD 20.6 million) (see Figure 3.9).

The bypass canal of Option 2 (see Figure 3.10) involves an 8 km long canal with bed width of 200 m at an elevation of 138 masl. The estimated cost is USD 9.6 million. Negative impacts of the option involve loss of 65 ha of land, no drainage when the Mekong levels exceed Se Bangfai and morphological effects in Se Bangfai.

The third option involves a 25 m high and 200 m long regulating dam with a reservoir capacity of 840 MCM operated at a level of 145 masl to provide irrigation water for 22,200 ha of land and flood protection to 92,910 ha along the right river bank. The estimated cost of this option is USD 138.7 million. The reservoir will flood 18 villages, adds dam break risks and requires construction of dikes along Se Banfai and Mekong. As an alternative a 30 m high and 450 m long dam with a reservoir capacity of 1,500 MCM has been mentioned. Costs of this alternative will be much higher and so will be its impacts.

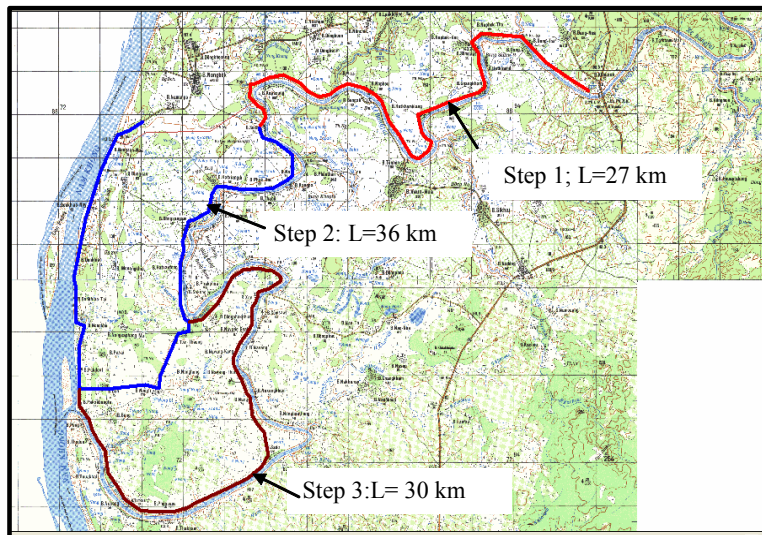


Figure 3.8 Step-wise construction of dikes along lower Se Bangfai

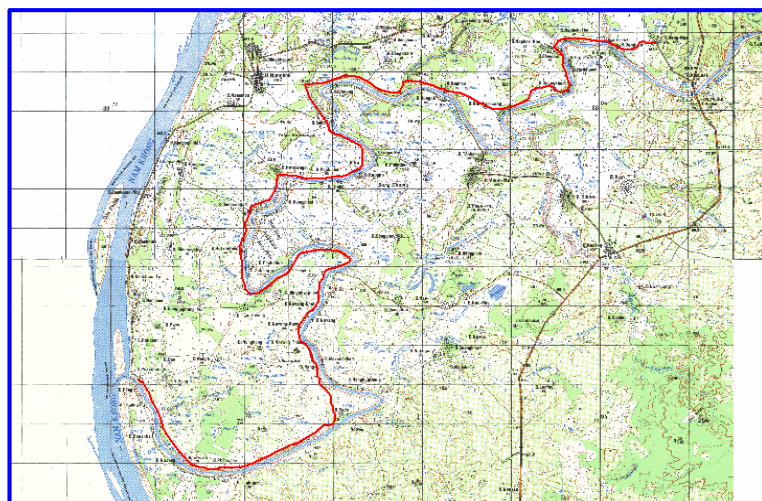


Figure 3.9 One-step construction of dike along right bank of Se Banfai



Figure 3.10 Canal "Xelat" from Sokbo to Bungsan Nua



### 3.4 Hydrological network and data availability

The upper boundary of the Se Bangfai to be included in the hydraulic model should be outside the backwater reach of the Mekong. An estimate of the distance over which the effect of the Mekong river is felt on the flood levels in the Se Bangfai can be derived from a first order backwater calculation (see also Figure 3.11 for a definition sketch):

$$\Delta h_L \approx \Delta h_0 \exp\left(\frac{-3S_0L}{h_e(1-Fr^2)}\right) \approx \Delta h_0 \exp\left(\frac{-3S_0L}{h_e}\right) \quad \text{for } Fr \ll 1$$

also, with  $\lambda = \frac{h_e}{3S_0}$ :  $\Delta h_L \approx \Delta h_0 \exp\left(-\frac{L}{\lambda}\right)$  (3.1)

because:  $\ln\left(\frac{\Delta h_L}{\Delta h_0}\right) \approx \frac{-3S_0L}{h_e} = -\frac{L}{\lambda}$  it follows:

at  $\Delta h_L = 5\%$  of  $\Delta h_0$  then  $\ln\left(\frac{\Delta h_L}{\Delta h_0}\right) = -3$ , so:

$$L_{5\%} \approx \frac{h_e}{S_0} = 3\lambda$$

- with:  $\Delta h_0$  = deviation from equilibrium depth at  $x=0$
- $\Delta h_L$  = deviation from equilibrium depth at  $x = L$
- $h_e$  = equilibrium depth
- $S_0$  = bed slope
- $Fr$  = Froude number
- $\lambda$  = characteristic backwater length

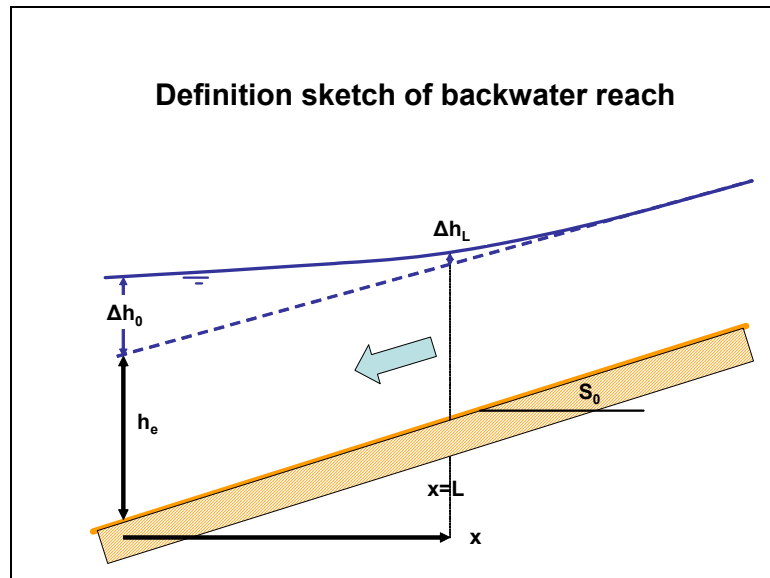


Figure 3.11 Definition sketch of extent of backwater reach

So, backwater of the Mekong on the Se Bangfai will be felt over a distance of:

$$L_{5\%} \approx \frac{h_e}{S_0} = \frac{15}{1.1 \times 10^{-4}} \approx 134 \text{ km} \quad (3.2)$$

where the bed slope  $S_0$  follows from the flood plain levels of 155.5 masl at Mahaxai and 139.5 masl along the Mekong at That Phanom, at a distance of about 143 km apart. The equilibrium depth  $h_e$  is taken as the maximum water level range at Mahaxai. It follows that the backwater effect from the Mekong exists till some 9 km d/s of Mahaxai. So, for simulation of the combined flooding in the lower Se Bangfai, basically, only the basin downstream of Mahaxai is of interest. The boundary conditions for this area comprise:

- the flow in the Se Bangfai at Mahaxai,
- lateral inflow to and outflow from the Se Bangfai between Mahaxai and the river mouth,
- water level in the Mekong at the junction with the Se Bangfai.

The key station on the Se Bangfai at Mahaxai is shown in Figure 3.12. This station controls apart from the runoff from the Se Bangfai basin in future also the trans-basin diversion from Nam Theun 2 Hydro-electric Project, which discharges upstream of Mahaxai via the Nam Pith and Nam Kathang,. The discharge record of Mahaxai starts in 1988.



Figure 3.12 Location of gauging station on Se Bangfai at Mahaxai

Regarding lateral inflow it is noted that no hydrometric stations are available on the tributaries Nam Oula and Se Noy downstream of Mahaxai. Only records from station Ban Se Bangfai at Highway 13S Bridge across the river is available. Basically, the lateral inflow can be derived from the discharge records at Highway Bridge 13S and Mahaxai. But the water levels at Highway Bridge 13S at 71.6 km from the river mouth are according to (3.2) affected by backwater from the Mekong. This complicates accurate assessment of the flow at the station and hence of the lateral inflow. Another way of deriving the lateral inflow and outflow downstream of Mahaxai would be through rainfall-runoff modelling provided that sufficient rainfall data is available.

The water level in the Mekong at the Se Bangfai junction is determined by the river discharge at the junction (That Phanom) and the conveyance capacity (with possible imposed water level conditions) downstream of the junction:

- The river discharge at the junction follows from the Mekong flow at Nakhon Phanom (Thailand) or Thakek (Laos) resp. 51 and 50 km upstream of the confluence and the

runoff from the Se Bangfai. The combined flow (including also the runoff from the minor tributaries Nam Kam and Huai Bang Sai) is observed at Mukhdahan (Thailand) and Savannakhet (Laos) resp. 43 and 46 km downstream of the confluence. Flow series for Nakhon Phanom and Thakek are available as from 1924 onward, whereas the discharge records of Mukhdahan and Savannakhet start in 1923 .

- The conveyance capacity of the Mekong downstream of the junction is determined by the river cross-section, bed slope and hydraulic roughness in the reach That Phanom-Mukhdahan/Savannakhet and beyond, covering a reach of approximately 150 km.
- For That Phanom at the junction a water level record is available as of 1972.

The rainfall, climatic and hydrometric stations and their data availability are presented in Table 3.1. From the table it is observed that daily rainfall data is available for a number of stations in the nineties and in the last decade. Prior to that only for two stations records are available. It follows that insufficient data on rainfall is available to create reliable long series of lateral inflow. Evaporation data is available for three stations from FAO's Climwat database.

Table 3.1 Overview of rainfall, climatic and hydrometric stations in and around Lower Se Bangfai with data availability

Variable	Stations	ID	Long	Lat	Availability
Rainfall	That Phanom	160403	104.7334	16.9500	1966-2005
	Phalan	160506	106.2333	16.7000	1991-94, 97, 01-06
	Thakek	170404	104.8000	17.4167	1961-64, 80-92, 94-06
	Signo	170501	105.0500	17.8333	1987, 90-06
	Muong Mahaxai	170502	105.2020	17.4133	1989-06
	Ban Kouanpho	170505	105.4167	17.4833	1995, 97-98, 00-06
	Ban Se Bangfai	320101	104.9850	17.0720	2004-06
Evaporation	Seno-FAO	160502	105.0000	16.6667	From Climwat database
	Mukhdahan-FAO	160401	104.7367	16.5400	-do-
	Nakhon Phanom-FAO	170403	104.8034	17.3984	-do-
Water level	Ban Se Bangfai (HB13)	320101	104.9850	17.0720	1988, 1992, 1994-2006
	Mahaxai	320107	105.2020	17.4133	1988-2006
	That Phanom (rkm 1166)	013105	104.7334	16.9500	1966-2005
	Nakhon Phanom (rkm 1217)	013101	104.8034	17.3984	1972-2005
	Thakek (rkm 1216)	013102	104.8067	17.3933	1980-2006
	Keng Kabao (rkm 1151)	013301	104.7500	16.8133	1972-1999
	Mukhdahan (rkm 1123)	013402	104.7367	16.5400	1960-2005
	Savannakhet (rkm 1126)	013401	104.7467	16.5617	1972-2006
Discharge	Ban Se Bangfai (HB13)	320101	104.9850	17.0720	1960-85, 88, 92, 94-04
	Mahaxai	320107	105.2020	17.4133	1988-2006
	Nakhon Phanom (rkm 1217)	013101	104.8034	17.3984	1924-2005
	Thakek (rkm 1216)	013102	104.8067	17.3933	1924-2006
	Mukhdahan (rkm 1123)	013402	104.7367	16.5400	1923-2005
	Savannakhet (rkm 1126)	013401	104.7467	16.5617	1923-2006

Table 3.2 Gauge zero levels of water level gauging stations in and around Se Bangfai

Station	ID	River	Rkm	GZ (masl)
Ban Se Bangfai (HB13)	320101	SBF	-	125.00
Mahaxai	320107	SBF	-	139.56
That Phanom (rkm 1166)	013105	Mekong	1166	127.94
Nakhon Phanom (rkm 1217)	013101	Mekong	1217	130.961
Thakek (rkm 1216)	013102	Mekong	1216	129.629
Keng Kabao (rkm 1151)	013301	Mekong	1151	128.00
Mukhdahan (rkm 1123)	013402	Mekong	1123	124.219
Savannakhet (rkm 1126)	013401	Mekong	1126	125.41

## 3.5 Hydrological characteristics

### 3.5.1 Rainfall

A long rainfall record in the neighbourhood of the lower Se Bangfai is available for station That Phanom, opposite the junction of the Se Bangfai with the Mekong. The long term annual rainfall for this station amounts 1,560 mm, varying from 890 to 1940 mm as can be observed from Table 3.3. About 87 % of the annual rainfall occurs during the South-West Monsoon from May to September, with highest rainfall on average in August, see also Figure 3.13. The annual rainfall, which is available for the years 1966-2005, does not show a distinct trend (Figure 3.14); the average rainfall in the period 1966-1987 of 1578 mm compares well with that in the period 1988-2005 of 1537 mm, the period for which also discharge data is available for the Se Bangfai at Mahaxai. Note that the average runoff depth at Mahaxai amounts about 1,650 mm per year. Compared to the rainfall value at That Phanom it indicates a strong orographic effect in the Se Bangfai rainfall from west to east.

Table 3.3 Monthly rainfall statistics and evaporation (ET<sub>o</sub>) in mm around Lower Se Bangfai

Variable	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
Average	3.1	20.7	43.4	79.1	200.3	274.8	276.6	350.6	250.3	54.7	4.8	1.2	1559.5
Stdev	8.3	31.6	40.9	46.7	88.1	95.8	108.1	151.9	129.8	53.5	10.0	4.7	267.9
Cv	2.69	1.53	0.94	0.59	0.44	0.35	0.39	0.43	0.52	0.98	2.11	3.96	0.17
Min	0.0	0.0	0.0	5.0	53.1	120.0	88.2	121.9	20.9	0.0	0.0	0.0	890.7
Max	31.3	161.7	150.9	226.4	377.1	516.8	542.8	758.8	538.1	257.9	58.3	27.6	1940.6
Evap.	122	122	156	162	150	124	127	120	112	129	128	121	1572

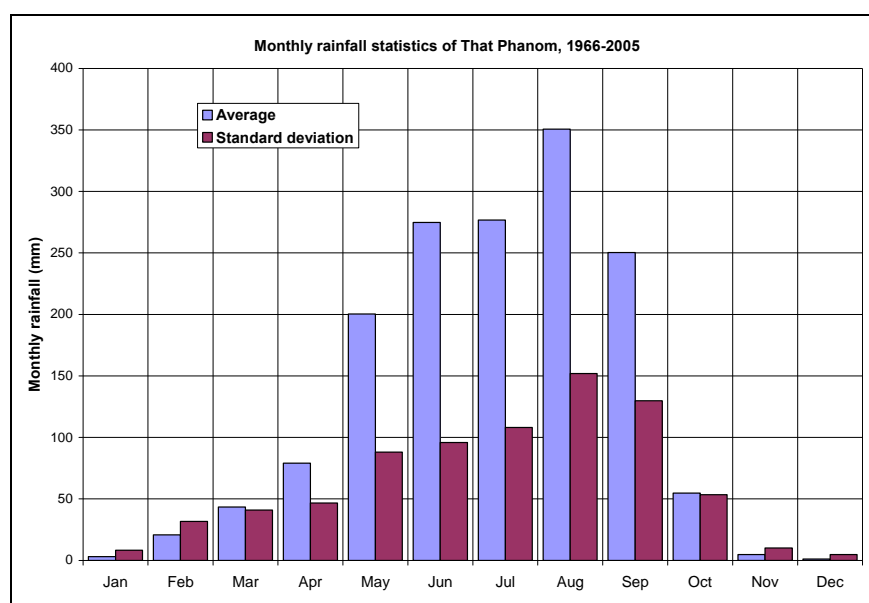


Figure 3.13 Monthly rainfall statistics of station That Phanom, Period 1966-2005

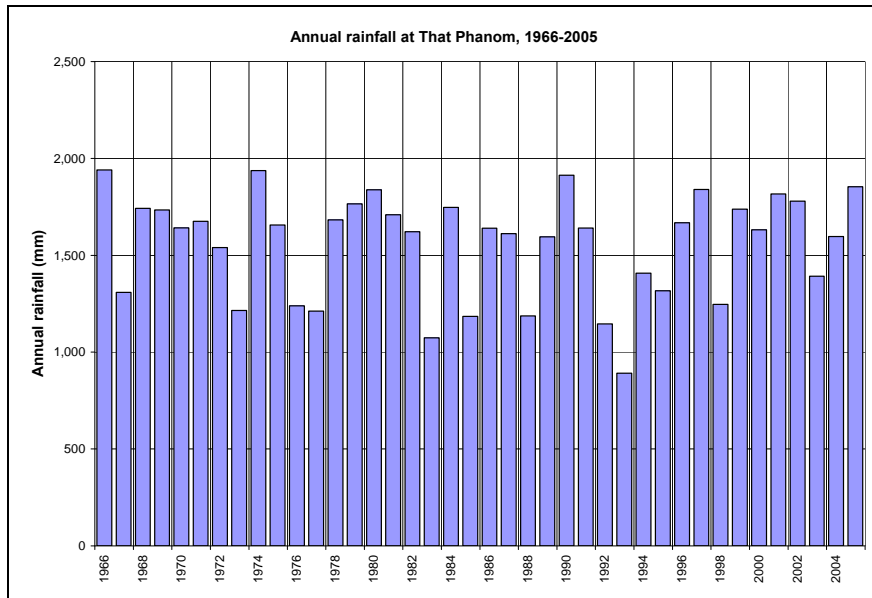


Figure 3.14 Annual rainfall at That Phanom, Period 1966-2005

### 3.5.2 Evaporation

Pan evaporation data is available for a few stations in the area, but the series showed unrealistic values for a number of years, and are therefore not presented. Below (Figure 3.15) monthly average daily reference evaporation rates (E<sub>T0</sub>) are shown for Seno/Savanakhet, Mukdahan and Nakhon Phanom, taken from the Climwat-database of FAO. During the flood season an average daily evaporation rate of about 4 mm/day or 120 mm per month is observed from the graph (see also Table 3.3). During these months the rainfall exceeds the evaporation by far, whereas from October to April there is water shortage as can be observed from Figure 3.16.

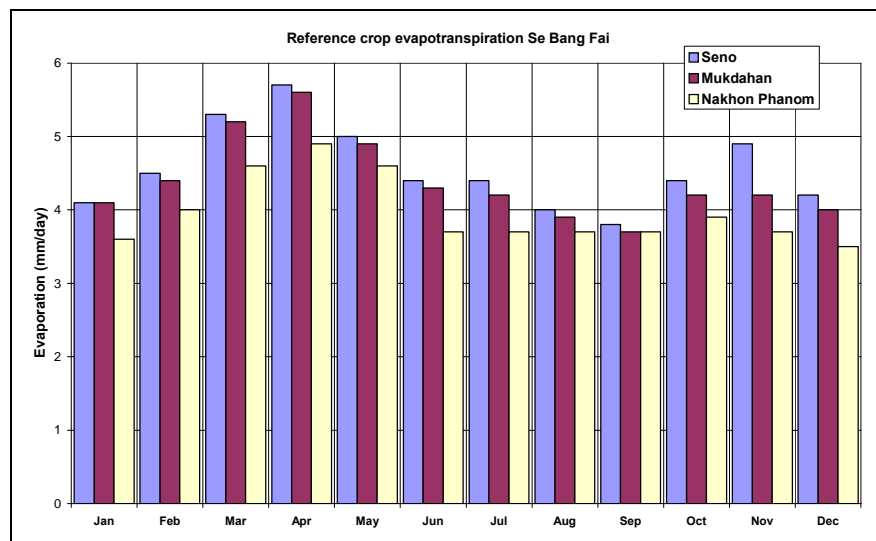


Figure 3.15 Monthly average daily evaporation (E<sub>T0</sub>) values for stations in the surrounding of the Lower Se Bangfai basin

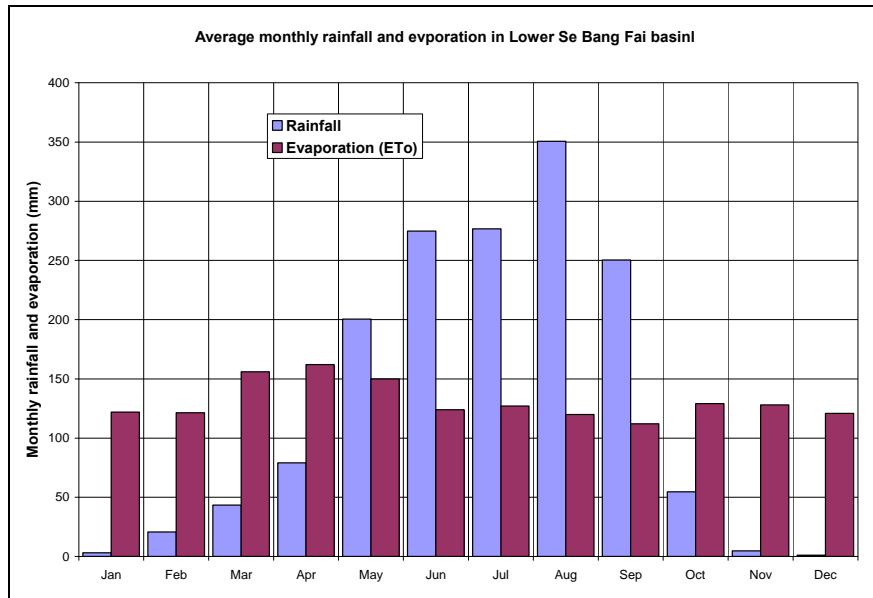


Figure 3.16 Average monthly rainfall and evaporation

### 3.5.3 Runoff

The monthly flow statistics of the Se Bangfai at Mahaxai is presented in Table 3.4 and Figure 3.17. Note that the average annual runoff depth at Mahaxai is larger than the annual rainfall at mouth. The frequency curves and extremes of the daily discharges of the Se Bangfai at Mahaxai are presented in Figure 3.18. The curves indicate that in the period from July till early October high discharges can be expected on the Se Bangfai. The hydrograph of a single year shows distinct sharply rising and falling limbs. From the frequency curves of the daily average water levels of the Mekong at That Phanom near the Se Bangfai river mouth (gauge zero = 127.94 masl and flood plain level 139.50 masl), shown in Figure 3.19, it is observed that these peaks are likely to coincide with high water levels on the Mekong.

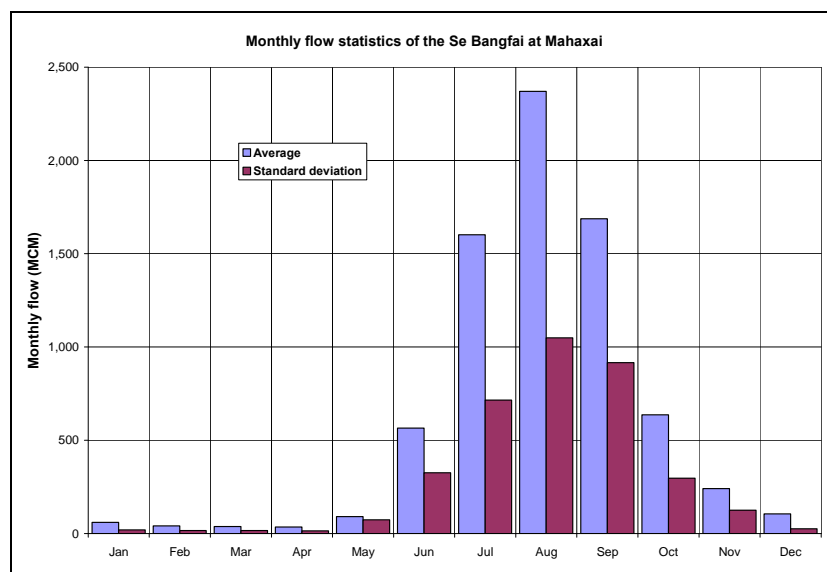


Figure 3.17 Monthly flow statistics of the Se Bangfai at Mahaxai

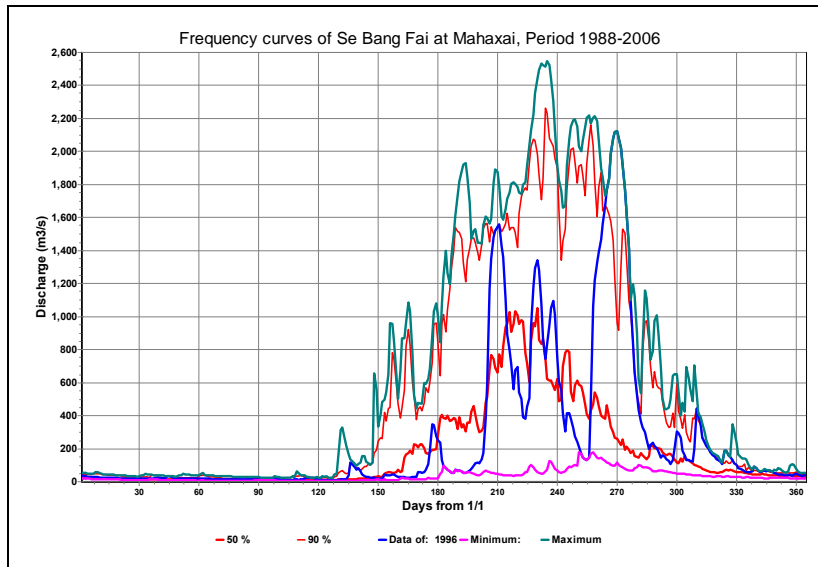


Figure 3.18 Frequency curves of daily average discharge of Se Bangfai at Mahaxai, Period 1988-2006

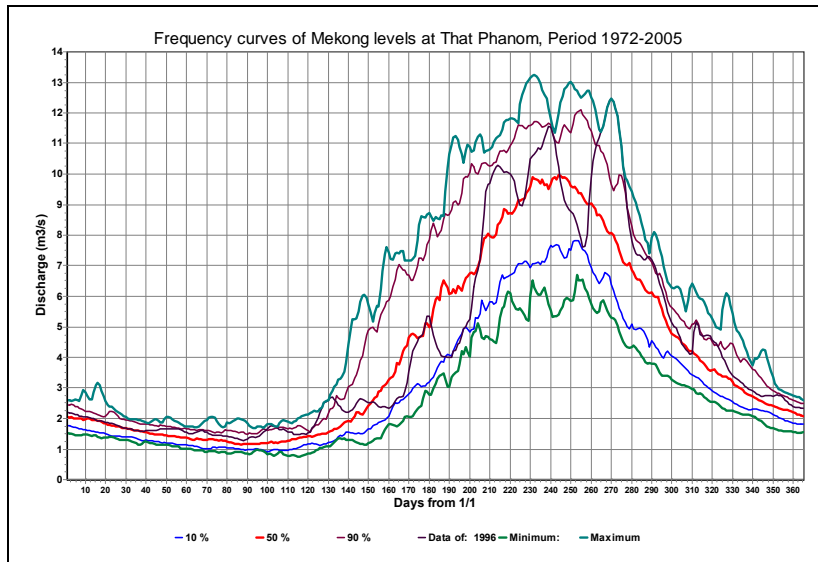


Figure 3.19 Frequency curves of daily average water levels of the Mekong at That Phanom, Period 1972-2005

Table 3.4 Monthly and annual statistics of runoff volume and depth of the Se Bangfai at Mahaxai

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
<b>Mean (MCM)</b>	60.0	41.5	37.2	34.7	90.8	565.6	1601.4	2370.7	1687.9	635.9	240.5	105.8	7504.4
<b>St.dev (MCM)</b>	19.6	15.4	15.5	14.0	73.4	325.8	714.9	1049.1	916.0	296.2	125.2	26.0	2155.4
<b>Mean (mm)</b>	13.3	9.2	8.2	7.7	20.1	125.1	354.3	524.5	373.4	140.7	53.2	23.4	1653.1
<b>St.dev (mm)</b>	4.3	3.4	3.4	3.1	16.2	72.1	158.2	232.1	202.7	65.5	27.7	5.7	476.9

The statistics of the monthly flow of the Mekong at Nakhon Phanom and Mukhdahan are presented in Table 3.5 and Figure 3.20. It is observed that, generally, the peak flows in the Mekong at these locations occur in August similar to the Se Banfai. The lateral inflow to the Mekong between Nakhon Phanom and Mukhdahan is seen to be relatively small; the annual flow of the Se Bangfai is only some 3% of the annual total of the Mekong at Nakhon Phanom. Finally, in Figure 3.21 the frequency curves of the daily discharge at Nakhon Phanom is presented.

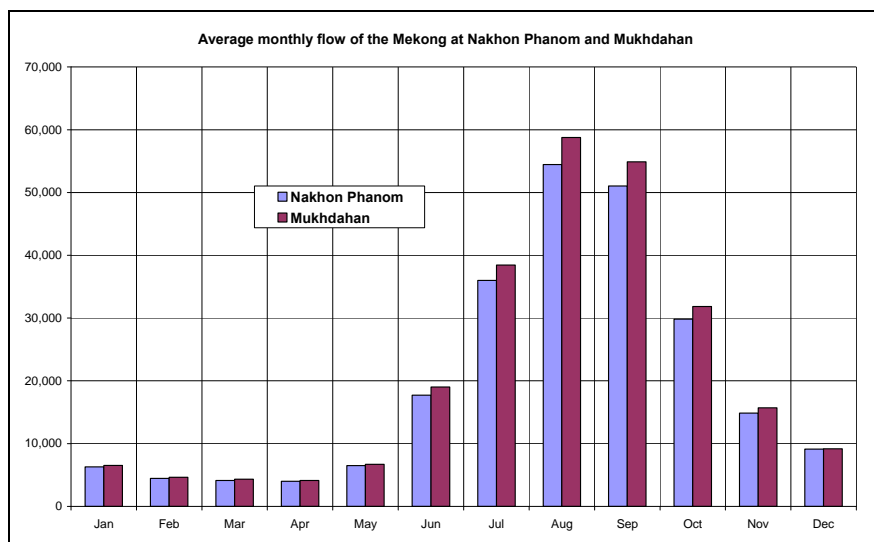


Figure 3.20 Average monthly flows in the Mekong at Nakhon Phanom and Mukhdahan

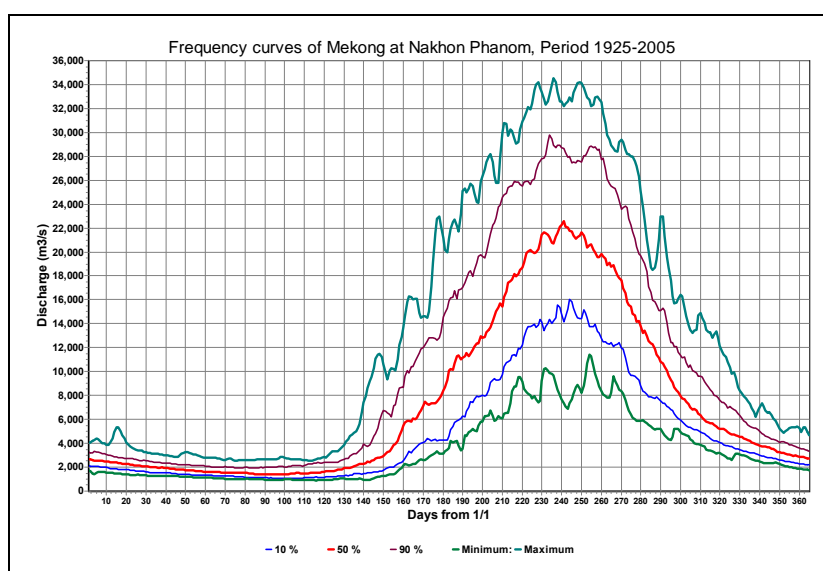


Figure 3.21 Frequency curves of daily average discharge of the Mekong at Nakhon Phanom, Period 1925-2005

Table 3.5 Monthly and annual statistics of the flow in the Mekong at Nakhon Phanom and Mukhdahan

N. Phanom	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
<b>Mean (MCM)</b>	6,277	4,469	4,130	4,000	6,492	17,722	35,993	54,457	51,055	29,808	14,860	9,111	238,376
<b>Stdev (MCM)</b>	1,316	944	940	943	2,234	6,288	9,870	11,741	10,984	7,027	3,554	1,652	39,460
<b>CV</b>	0.21	0.21	0.23	0.24	0.34	0.35	0.27	0.22	0.22	0.24	0.24	0.18	0.17
<b>Min</b>	3,902	3,034	2,767	2,530	3,171	7,532	15,149	28,206	24,261	15,811	8,859	6,147	138,447
<b>Max</b>	10,864	7,371	7,106	6,729	17,503	33,849	62,865	81,324	70,290	45,702	27,322	13,504	340,084
Mukhdahan	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
<b>Mean (MCM)</b>	6,522	4,651	4,317	4,134	6,703	19,029	38,441	58,772	54,893	31,841	15,686	9,183	253,875
<b>Stdev (MCM)</b>	1,030	690	686	733	2,102	6,810	9,788	12,203	11,021	7,576	3,634	1,613	36,214
<b>CV</b>	0.16	0.15	0.16	0.18	0.31	0.36	0.25	0.21	0.20	0.24	0.23	0.18	0.14
<b>Min (MCM)</b>	4,162	3,300	2,844	2,608	3,166	7,296	19,718	33,006	29,129	15,058	8,948	5,700	165,954
<b>Max (MCM)</b>	10,679	7,120	6,717	6,278	15,077	39,782	64,697	88,261	81,363	51,088	30,285	12,652	330,576



## 4 Hydraulic model

### 4.1 General

The flood levels in the Lower Se Bangfai are a function of the river discharge and the water levels in the Mekong. These flood levels are determined with a one-dimensional hydraulic model based on ISIS. This model has been developed by the LNMC and MRC. The schematization of river and flood plain, applied boundary conditions and calibration is discussed in this chapter.

### 4.2 Schematization

The hydraulic model of the Se Bangfai used for flood analysis in the lower Se Bangfai comprises the Se Bangfai river from Mahaxai to the river mouth at That Phanom and the Mekong between Nakhon Phanom upstream and Mukhdahan downstream of the confluence. The layout of the model is shown in Figure 4.1, with details in Figure 4.2. This model replaces the initial hydraulic model used for flood flow simulations and analysis during Stage 1 of FMMP-C2, which covered the Se Bangfai downstream of Mahaxai only.

#### Schematization of Se Bangfai

The Se Bangfai branch of the new model covers the lower 157.953 km of the river from the mouth of the Nam Khatang, at 14.916 km upstream of Mahaxai, to the confluence with the Mekong at That Phanom. The river bathymetry is represented by 38 surveyed cross-sections. In addition, the mouth of the Se Bangfai tributary Se Noy, which discharges about 10 km upstream of station Ban Se Bangfai/Highway 13S Bridge, is included in the model with 3 surveyed cross-sections. The remaining tributaries are modelled as lateral inflow points. The longitudinal profile and characteristic cross-sections at Mahaxai and Ban Se Bangfai are shown in Figure 4.3 to Figure 4.5.

The flood plains along the lower Se Bangfai are schematised by storage cells with a depth-volume relation. The storages are connected to the main stream via spillways/two way weirs. The schematisation of the storage cells has been derived from a digital elevation model (DEM), which in turn was based on topographic information in 1/10,000, 1/20,000 and 1/50,000 scale maps, updated by a sample survey in July 2008. The survey party consisted of the modelling teams of LNMC and MRC together with the irrigation engineer of the Dept. of Agriculture and Forestry of Khammouane Province. A high resolution DEM (15 x 15 m) was developed for the flood plain downstream of Highway 13, reproduced from 1/1,000 scale maps. To include the latest information on the elevation of the levees and layout of the flood protection structures in the model for reliable simulation of the spill to the flood plain, the levees and structures on either side of the lower Se Bangfai have been surveyed in October 2008.

The hydraulic roughness in the Se Bangfai branch of the model, expressed as Manning-n, ranges from 0.05-0.07 in the upper part of the model near Mahaxai to 0.045-0.036

downstream of the Se Noy confluence, see Figure 4.6. In comparison to the initial model used in Stage 1 the roughness values in the lower part have substantially increased.

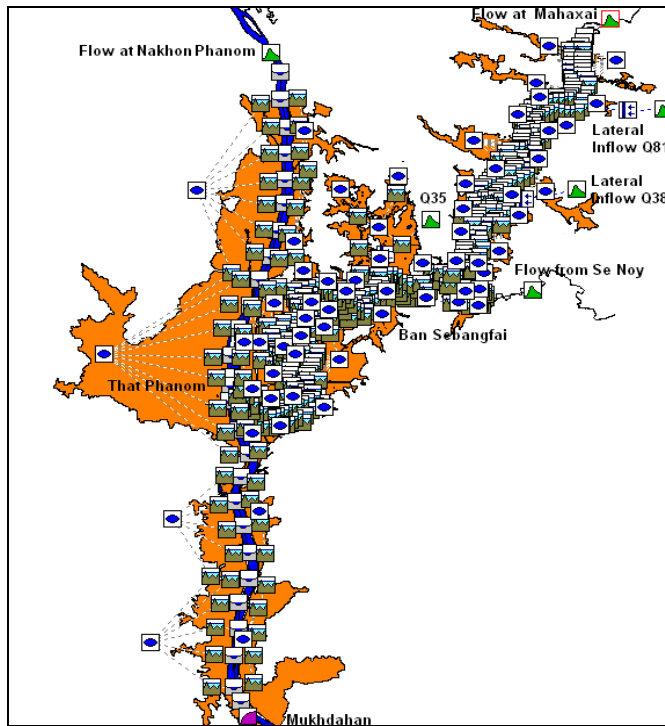


Figure 4.1 Schematization of Se Bangfai in ISIS-hydraulic model

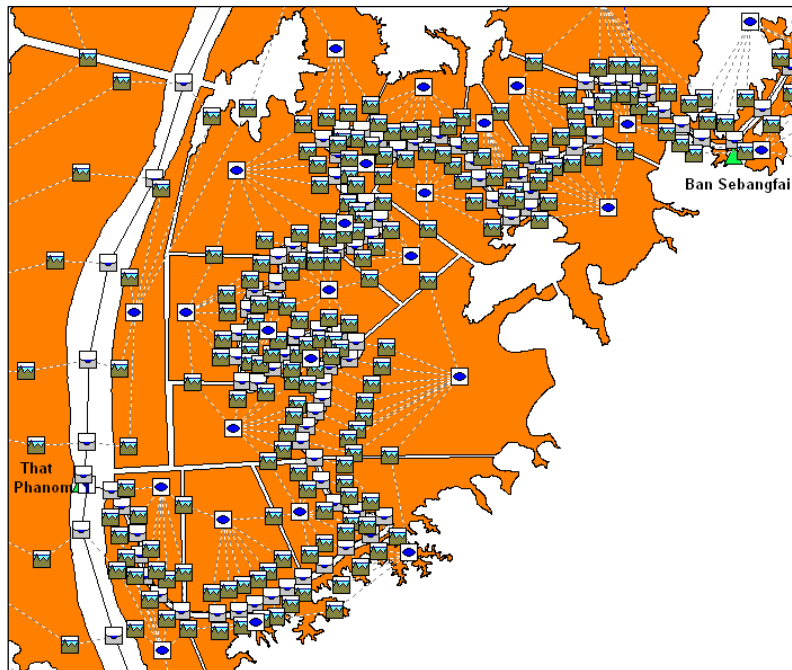


Figure 4.2 Detail of ISIS-hydraulic model of Se Bangfai near river mouth

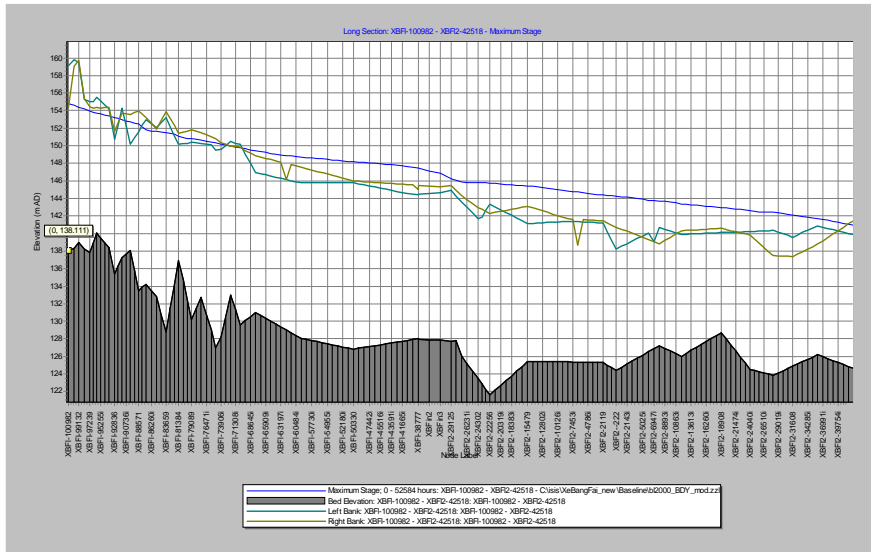


Figure 4.3 Longitudinal profile of Se Bangfai from 15 km u/s Mahaxai to river mouth

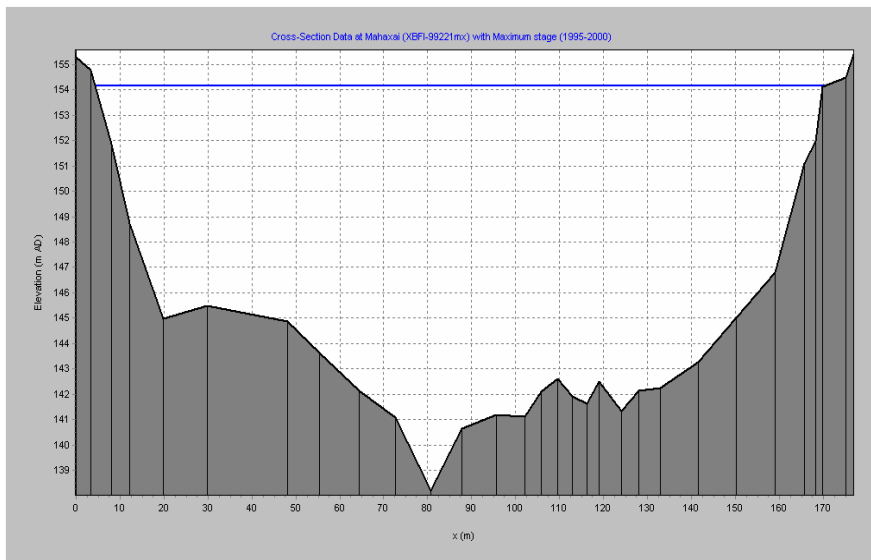


Figure 4.4 River cross-section at Mahaxai

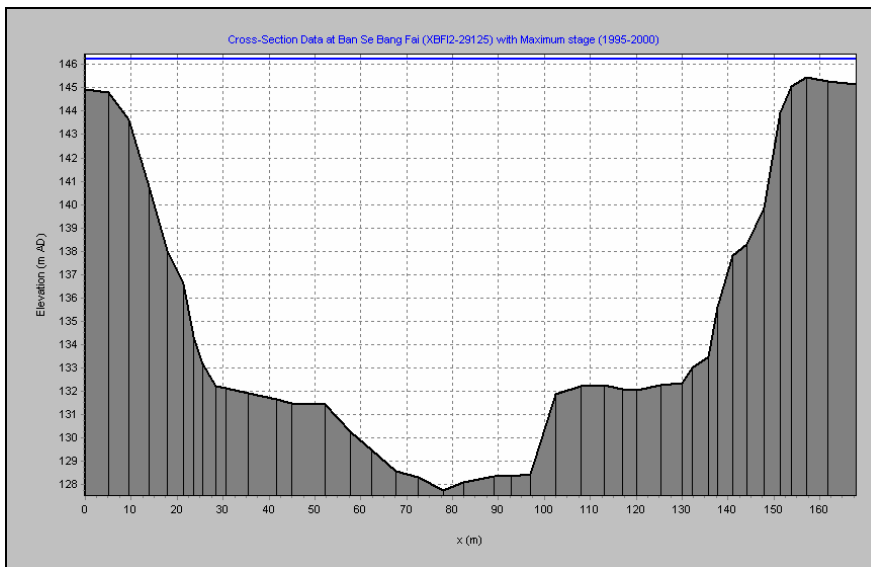


Figure 4.5 River cross-section at Ban Se Bangfai/Highway 13S Bridge

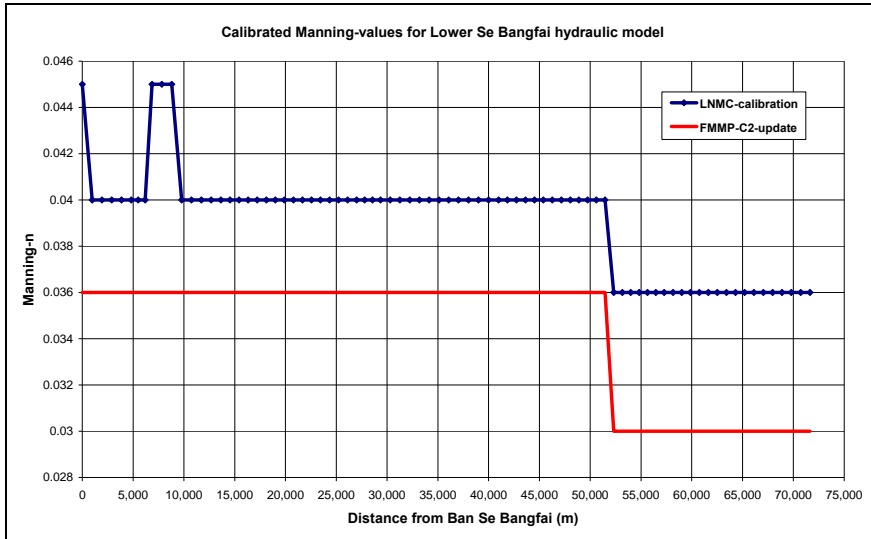


Figure 4.6 Hydraulic roughness of lower Se Banfai river (Ban Se Bangfai-That Phanom) as calibrated by LNMC and updated by FMMP-C2

### Schematization of Mekong

The Mekong reach between Nakhon Phanom and Mukhdahan has been schematized by 25 cross-sections extracted from the ISIS-model derived from details presented in the Hydrographic Atlas of the Mekong River. A longitudinal profile of the river stretch is presented in Figure 4.7. In the schematization at a number of locations a connection is established between the Mekong river and the flood plain adjacent to the Se Bangfai.

A constant Manning roughness of  $n = 0.032$  is assumed for the Mekong branch of the hydraulic model.

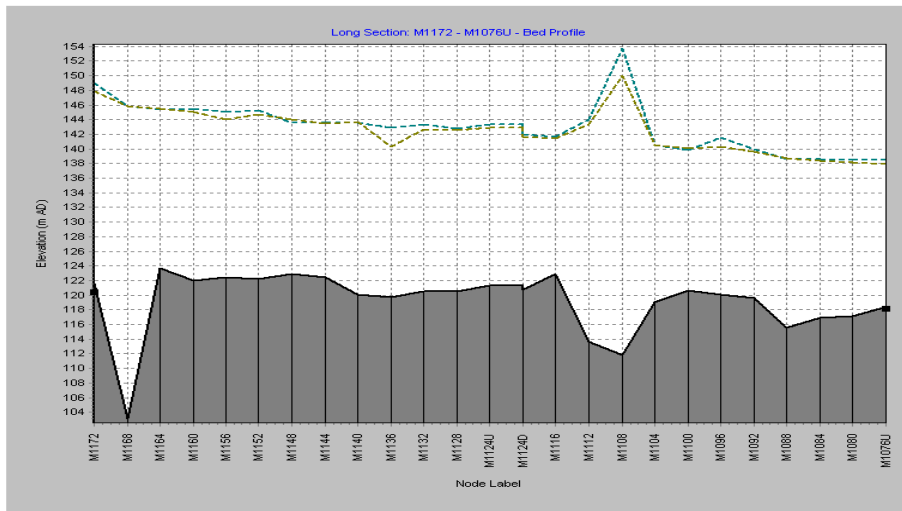


Figure 4.7 Longitudinal profile of Mekong from Nakhon Phanom to Mukhdahan

## 4.3 Boundary conditions

### 4.3.1 General

The following boundary conditions are used in the hydraulic model:

- for the Se Bangfai branch:
  - discharge at Mahaxai as upstream inflow;
  - lateral inflow (from Nam Oula, Se Noy, etc) schematized to concentrated inflows at the Se Noy confluence and the locations Q81 and Q38 upstream and location Q35 to flood plain around Ban Se Bangfai;
- for the Mekong branch:
  - discharge at Nakhon Phanom as upstream inflow
  - downstream at Mukhdahan a stage-discharge relation (for model calibration the observed water level at Mukhdahan has been considered, but this is not feasible for flood hazard assessment).

The boundaries are discussed below.

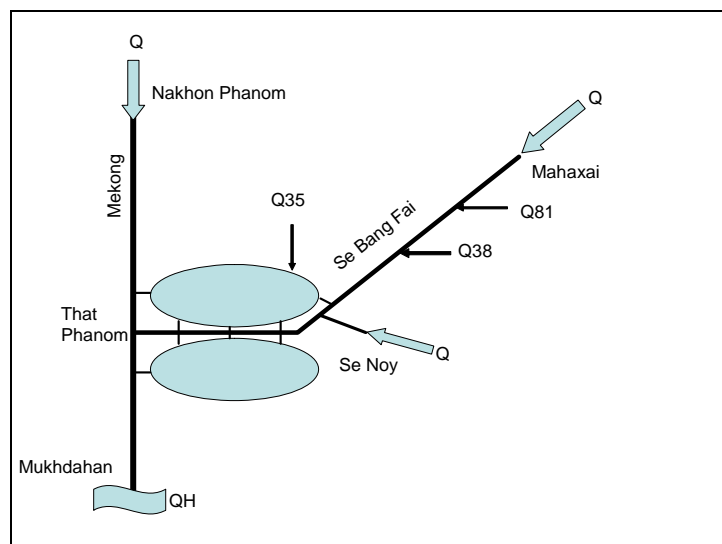


Figure 4.8 Schematic layout of boundary conditions in the hydraulic model of the Lower Se Bangfai

### 4.3.2 Discharge at Mahaxai

The upstream discharge boundary is derived from the discharge record of the Se Bangfai at Mahaxai, which is available for the period 1988-2006. This series is based on the water level observations at station Mahaxai and regularly updated discharge rating curves. An example of a discharge rating for Mahaxai is shown in Figure 4.9. Though in some years there is substantial difference between the discharge observations and the rating curve used for the creation of discharge series, in general the applied discharge ratings match with the observations. From the applied curves it appears that the river downstream of Mahaxai is not stable. A shift of 1 to 2 m is observed from Figure 4.10 for fixed high discharges. It

implies that regular adjustments to the bathymetry of the river in the hydraulic model would be required to match with the observed water levels at the station.

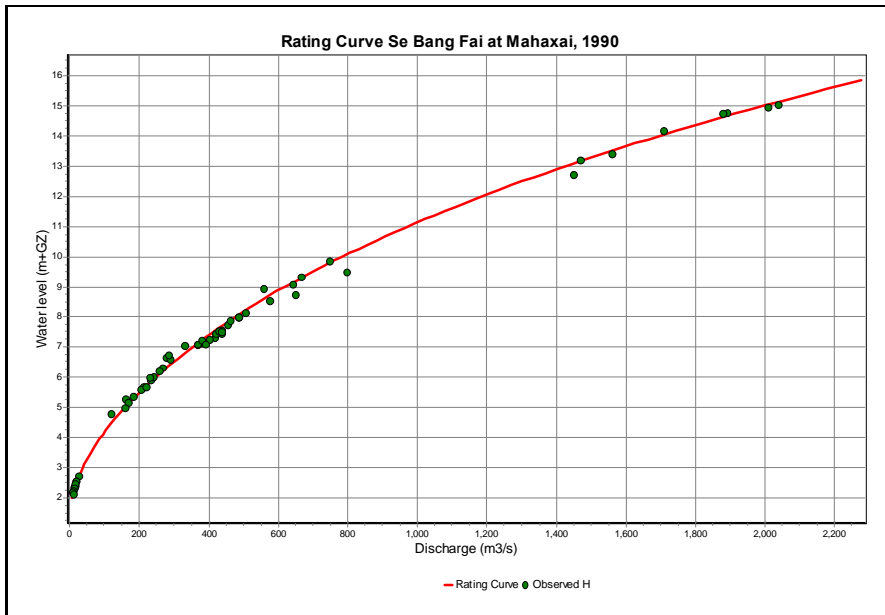


Figure 4.9 Discharge rating of the Se Bangfai at Mahaxai for the year 1990

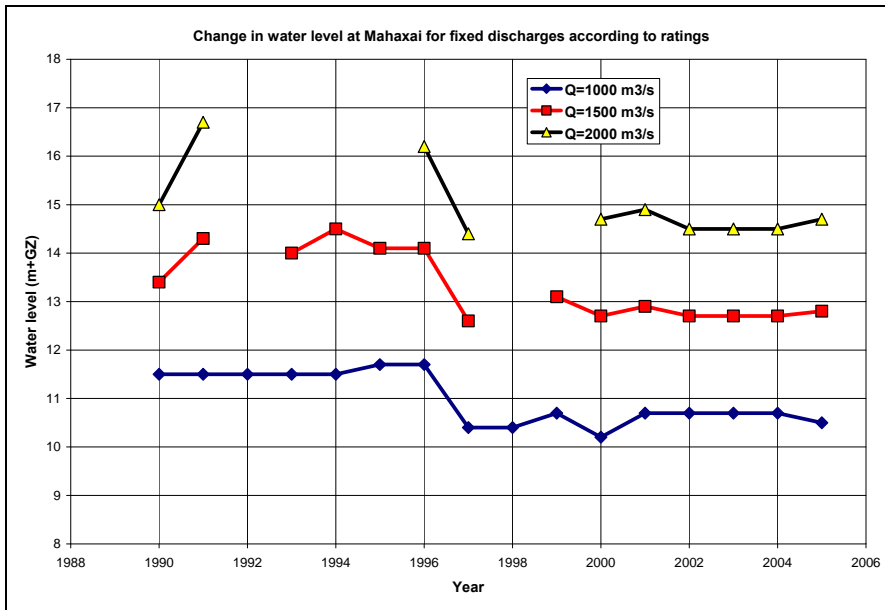


Figure 4.10 Water level at fixed discharge levels in the Se Bangfai at Mahaxai, 1990-2005

Hydrographs show rapid rise and fall, which leads to unsteady flow effects in the stage-discharge relationship. No such corrections seem to have been implemented in the past. Adjustment of the discharge measurements using the Jones correction when establishing the discharge rating curve, and application of this correction in the conversion of stages into discharge would improve the discharge series of the Se Bangfai at Mahaxai.

### 4.3.3 Lateral inflow

Beside a discharge record for Mahaxai also a long discharge series exists for station Ban Se Bangfai. The difference between the series is the lateral inflow between the two locations.

However, the discharge series of Ban Se Bangfai has not correctly been derived. A unique stage-discharge has been applied to the water levels at the station, whereas from a summary of the stage-discharge measurements at Ban Se Bangfai in Figure 4.11 it is immediately observed that the station is strongly affected by backwater from the Mekong (see also equation (3.2)). In view of the very mild bed slope of the river downstream of Ban Se Bangfai it is estimated that about 40% of the set up at the river mouth is still available at the site. A slope correction is required to adjust the flows, for which a twin gauge approach with the gauge reading at That Phanom as the second series is needed.

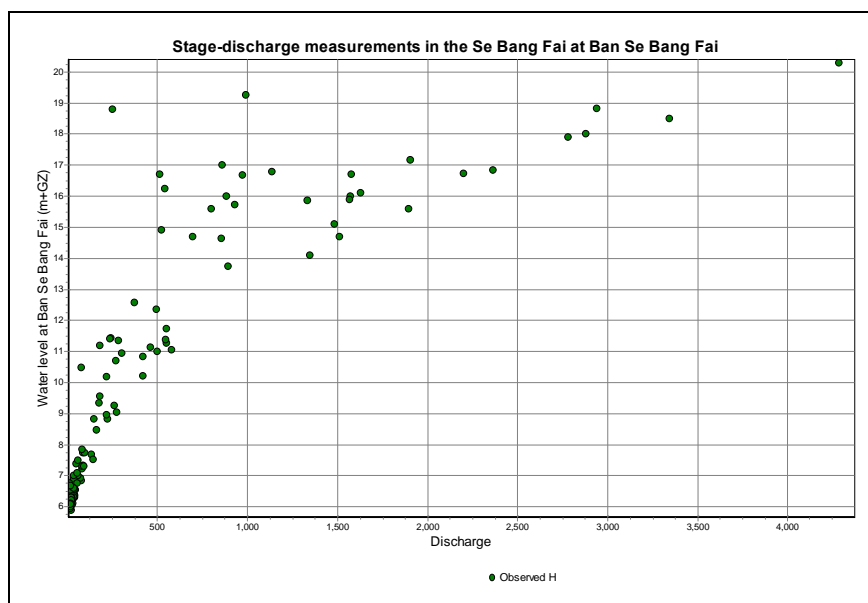


Figure 4.11 Backwater affected and backwater free stage-discharge measurements

However, a simpler procedure has been applied, making use of a relation between the observed discharge at Ban Se Bangfai and the discharge on the same day at Mahaxai. Particularly for the high discharges a fairly unique relationship exists:

$$Q_{BSBF} = 0.838Q_{Mahaxai}^{1.108} \quad (4.1)$$

with:  $Q_{BSBF}$  = discharge at Ban Se Bangfai  
 $Q_{Mahaxai}$  = discharge at Mahaxai  
 $Q_{lat}$  = lateral inflow between Mahaxai and Ban Se Bangfai

This relation is shown in Figure 4.12, and when corrected for the flow at Mahaxai it gives the lateral inflow to the river between Mahaxai and Ban Se Bangfai:

$$Q_{lat} = Q_{BSBF} - Q_{Mahaxai} = Q_{Mahaxai} (0.838Q_{Mahaxai}^{0.108} - 1) \quad \text{for: } Q_{Mahaxai} > 5.2 \text{ m}^3 / \text{s} \quad (4.2)$$

where:  $Q_{lat}$  = lateral inflow between Mahaxai and Ban Se Bangfai.

The lateral inflow is seen from Figure 4.13 to increase gradually to about 90% of the discharge at Mahaxai, in case of extreme floods, commensurate with the respective drainage areas (44% of the total basin area lays upstream of Mahaxai and 40% between Mahaxai and Ban Se Bangfai), see Section 3.2. Downstream of Ban Se Bangfai net rainfall also contributes to inundation of the flood plain; it covers an area of some 16% of the total basin area.

The LNMC modelling team followed a different approach and extracted the lateral inflow from the existing SWAT rainfall-runoff model from Vientiane to Mukhdahan. The lateral

inflow was taken as the sum of the sub-basins 435, 438 and 439. Though it will be very difficult to get reliable runoff from the SWAT model for these sub-basins as hardly any rainfall station is available, they claim to have obtained an acceptable fit for the SWAT sub-basins upstream of Mahaxai, calibrated to the flow at Mahaxai, with an efficiency coefficient of 0.6 and a volume ratio of 99.5%. Equation (4.2) shows that the lateral inflow downstream of Mahaxai indeed is strongly correlated with the flow at the station.

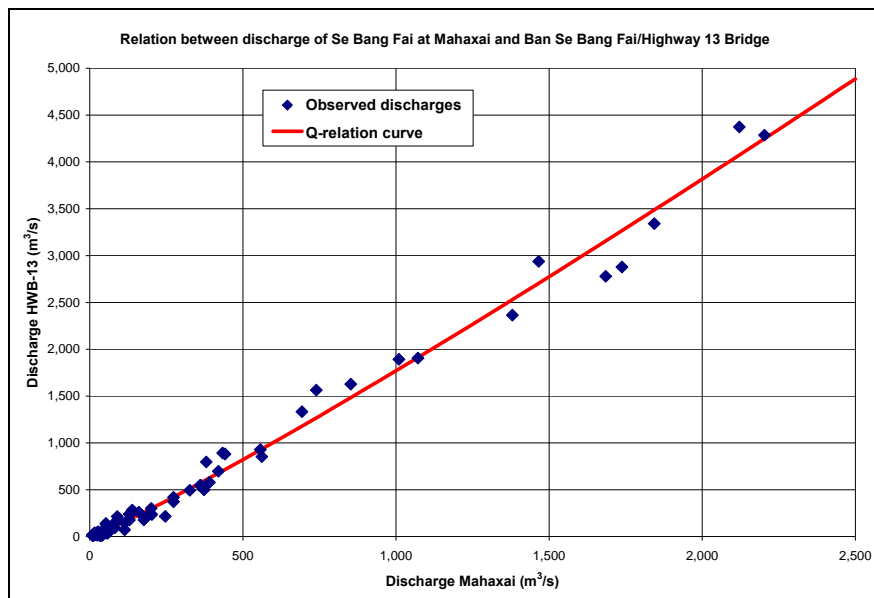


Figure 4.12 Discharge of Se Bangfai at Ban SeBang Fai as function of discharge at Mahaxai

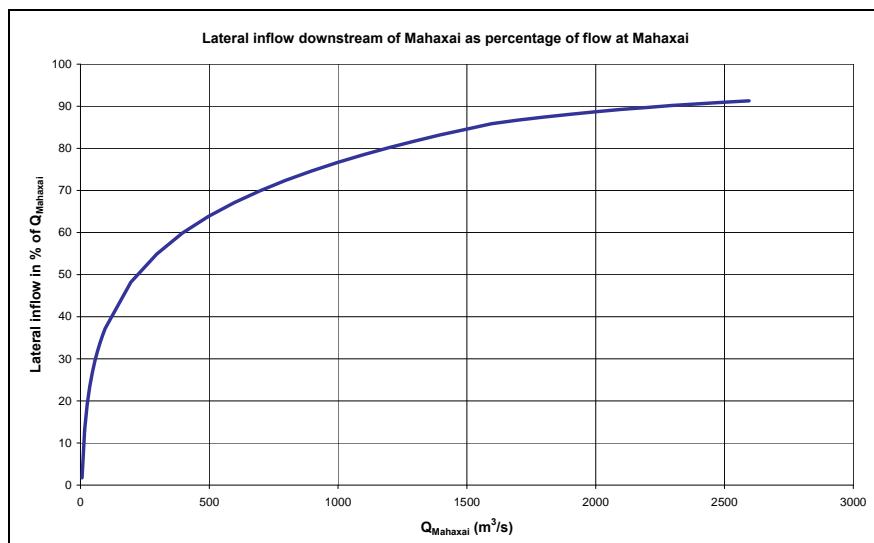


Figure 4.13 Lateral inflow between Mahaxai and Ban Se Bangfai as percentage of the discharge at Mahaxai

#### 4.3.4 Discharge at Nakhon Phanom

The discharge at Nakhon Phanom acts as upstream boundary for the Mekong branch. Discharge series as from 1924 onward are available for this location. A complete review of this series is not possible as water levels are only available for this station since 1972, whereas stage-discharge measurement data are available from 1962 onward. Hence, no information is present as to how the series prior to 1962, resp. 1972 have been created. From Figure 4.14 and Figure 4.15 it is observed that the discharge rating for Nakhon Phanom



varies considerably, hinting at large scale morphological development in the control reach downstream of the station. Figure 4.15 shows maximum variations up to about 2.5 m for a fixed high discharge. It also shows that in the years without any stage-discharge measurement the previous discharge rating is continued to be applied, which may have, in view of the unstable river bed, serious consequences for the quality of the discharge series. To validate the relevant discharge characteristics of Nakhon Phanom (peak flow and flood volume) comparisons have been made with the same quantities at Mukhdahan, downstream. In view of the larger total drainage area at Mukhdahan and limited flood plain storage along the main river it is expected that both annual peak flow and flood volume (1 June- 30 November) will be larger at the downstream site. Figure 4.16 and Figure 4.17 show that generally the peak flows and flood volumes are consistent. Only in a limited number of years consistency is not attained. This is particularly so for the period 1976-1993 when no discharge ratings were available for Nakhon Phanom; at Mukhdahan the availability is slightly better and shows variations where the Nakhon Phanom rating was kept constant. The inconsistencies are, however, not strong. From double mass analysis between the same stations for the same quantities as before also no serious anomalies were found as can be observed from Figure 4.18 and Figure 4.19. Hence, it is concluded that the series of flood peaks and flood volumes that can be obtained from the Nakhon Phanom discharge series are generally reliable, and form a solid basis for flood hazard assessment.

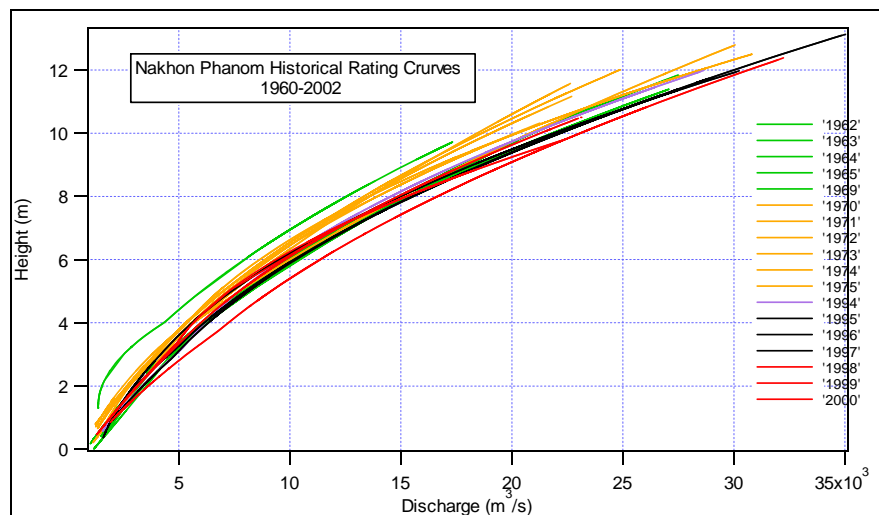


Figure 4.14 Stage-discharge relation of Mekong at Nakhon Phanom (MRC, 2002)

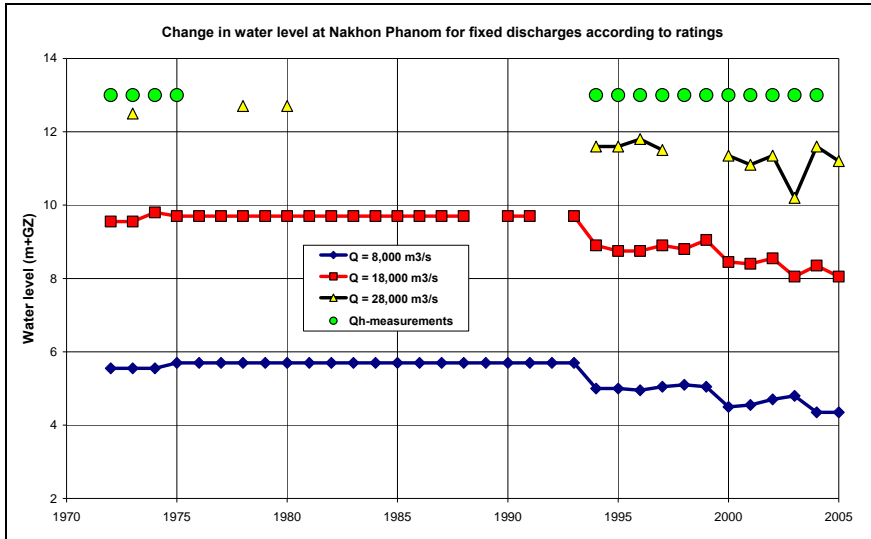


Figure 4.15 Change in water level at Nakhon Phanom for fixed Mekong discharges, Period 1972-2005

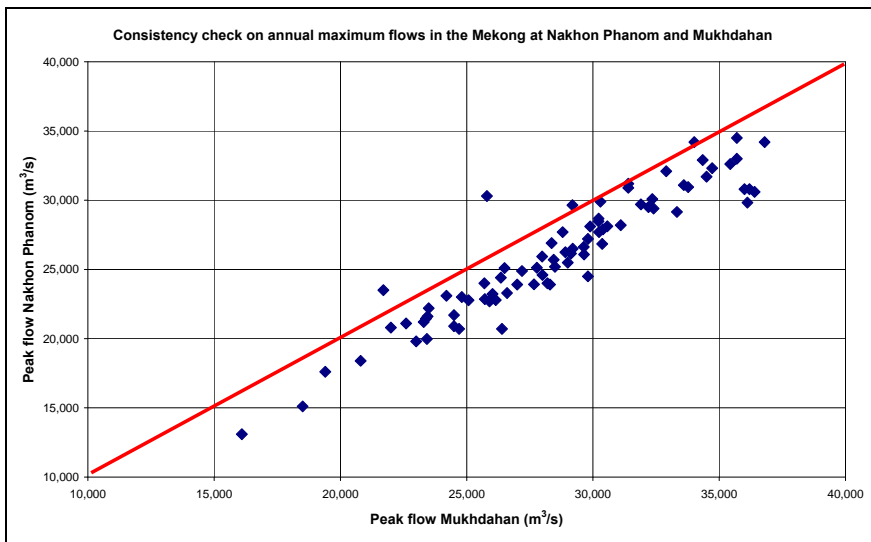


Figure 4.16 Comparison of annual peak flows at Nakhon Phanom with Mukhdahan

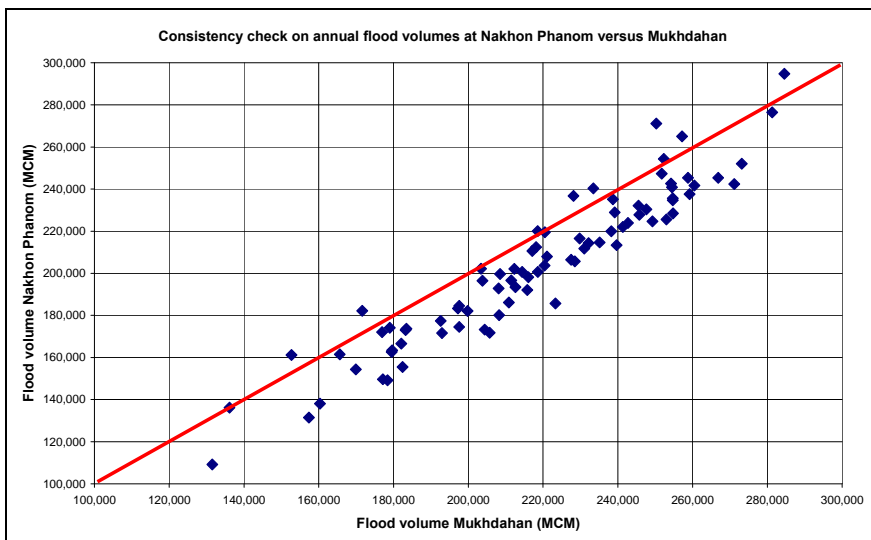


Figure 4.17 Comparison of annual flood volumes at Nakhon Phanom with Mukhdahan

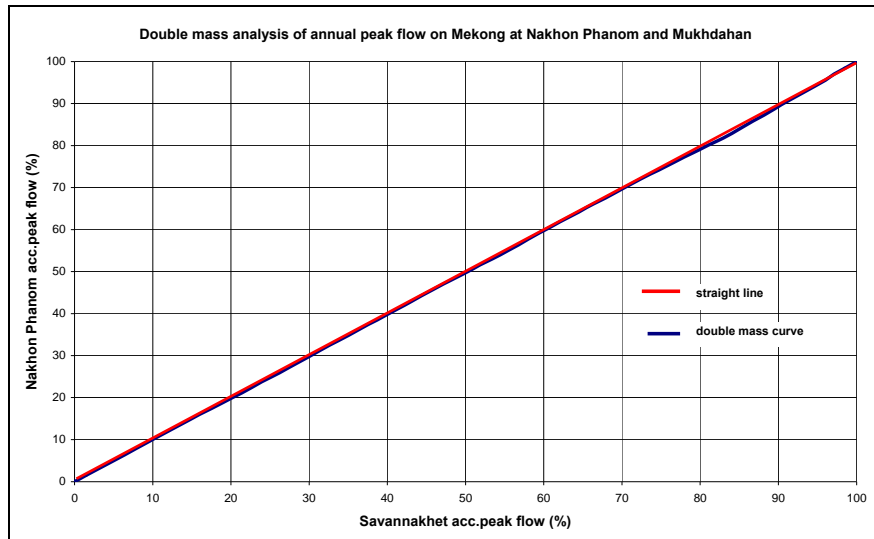


Figure 4.18 Double mass analysis of annual peak flows at Nakhon Phanom and Mukhdahan

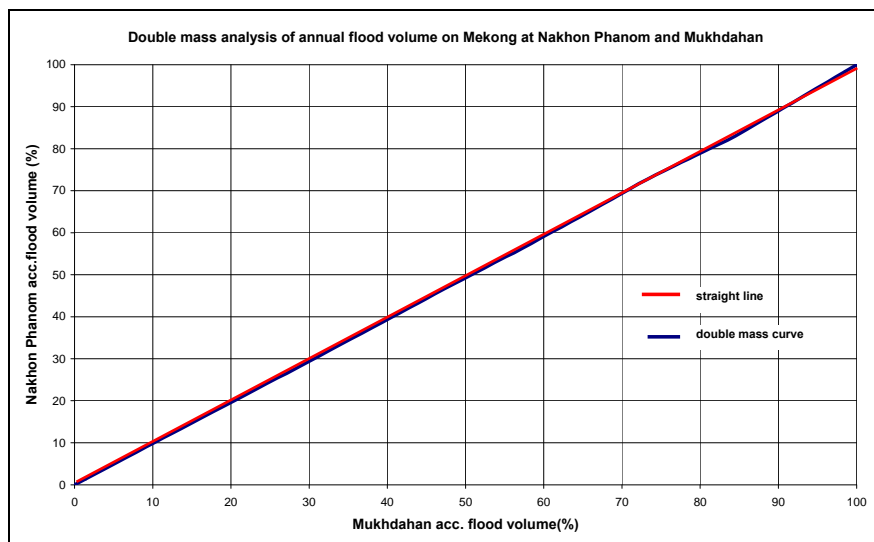


Figure 4.19 Double mass analysis of annual flood volumes at Nakhon Phanom and Mukhdahan

### 4.3.5 Stage–discharge relation at Mukhdahan

At the downstream end of the model on the Mekong at Mukhdahan a stage-discharge relation has to be imposed rather than a water level. Different from model calibration, applying a water level at that location for analysing development scenarios in the lower Se Bangfai would not be correct as these developments may affect the discharge and hence the levels at Mukhdahan, which in turn gives severe backwater effects on the water level at the Se Bangfai mouth at That Phanom; the characteristic backwater length for the Mekong at high flows for this reach is about 50 km, whereas the distance between Mukhdahan and That Phanom is only 43 km. It follows that of a disturbance in the water level at Mukhdahan still over 40% is left at That Phanom. Therefore a stage-discharge relation is imposed at this site for analysis of developments rather than a water level. Unfortunately, similar to the situation in Nakhon Phanom, the stage-discharge relation at Mukhdahan varies from year to year as can be observed from Figure 4.20 and Figure 4.21. For the highest discharges the levels vary up to 1.5 m.

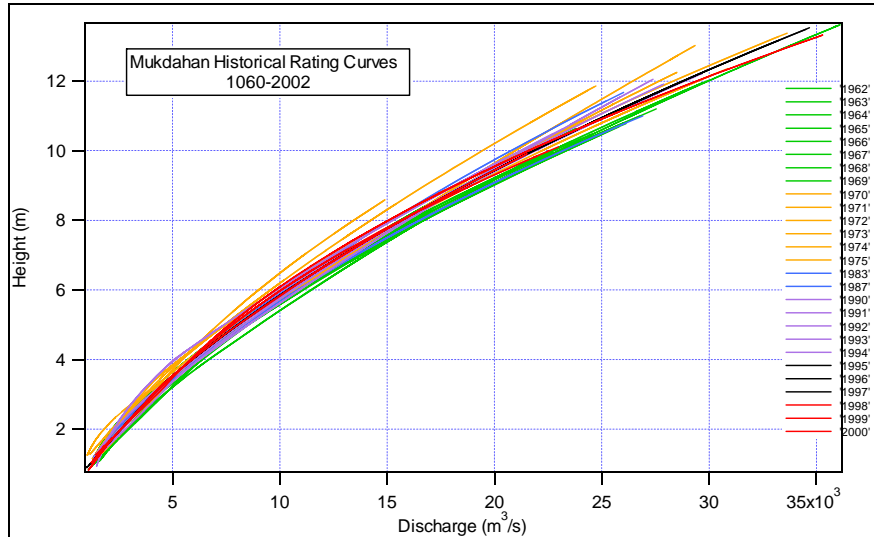


Figure 4.20 Stage-discharge relation of Mekong at Mukhdahan (MRC, 2002)

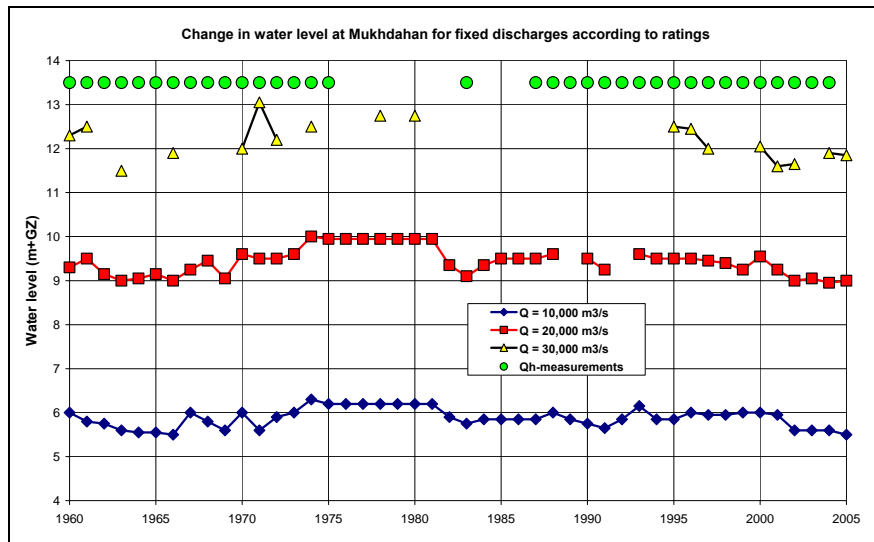


Figure 4.21 Change in water level at Mukhdahan for fixed Mekong discharges, Period 1960-2005

The Mekong branch of the hydraulic model was calibrated for the year 2000 stage-discharge conditions, see Figure 4.22. From Figure 4.21 it is observed that this curve forms a middle position of historical discharge curves observed at Mukhdahan. Hence, levels for high discharges at this location based on the year 2000 curve may be up to 0.75 m off, up and down. At Nakhon Phanom this variation was in the order of +/- 1.25 m, hence at That Phanom in between these locations a variation of about +/- 1.00 m is to be expected, relative to the year 2000 conditions of the river bed. Observed frequency distributions of water level changes relative to year 2000 for fixed high discharges at Nakhon Phanom and Mukhdahan are presented in Figure 4.23. It is observed that these distributions are approximately uniform. This additional uncertainty has to be taken into account in the flood hazard assessment and derived levels. The changes in the ratings observed at Mukhdahan appear to be fully uncorrelated with the peak flows and flood volume at Nakhon Phanom for all years with discharge measurement data. Hence, generated flows at the latter are not indicative for the type of change in the discharge rating at Mukhdahan.

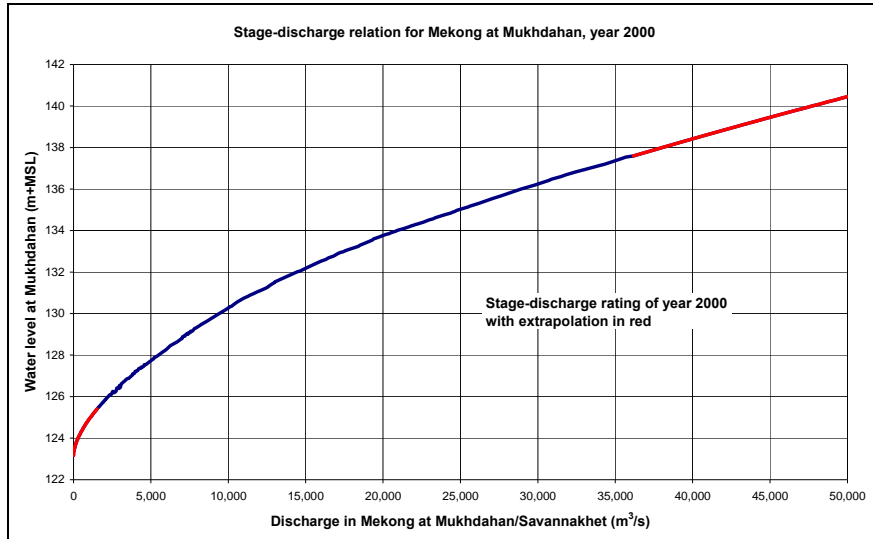


Figure 4.22 Assumed stage-discharge relation for Mukhdahan in hydraulic model, year 2000

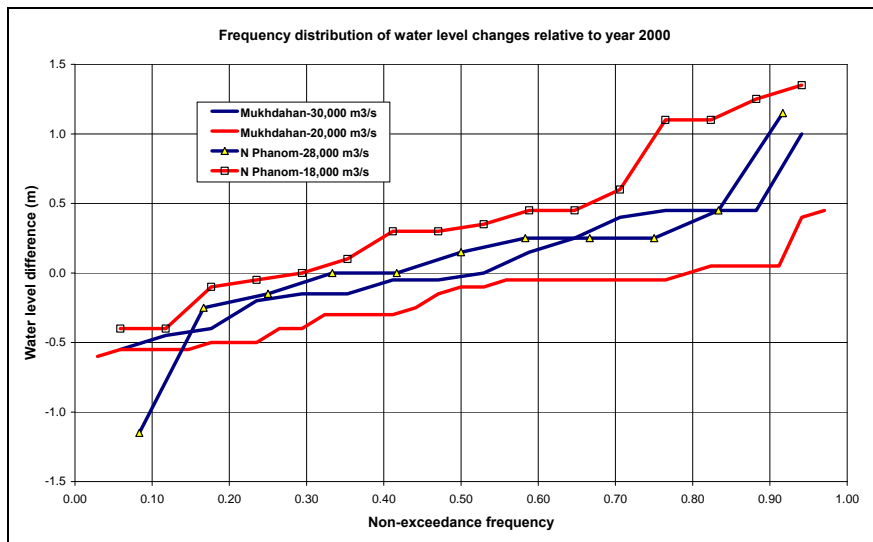


Figure 4.23 Frequency distribution of water level changes relative to year 2000 for fixed high discharges in Mekong at Nakhon Phanom and Mukhdahan

## 4.4 Model performance test

For the verification of the hydraulic model the gauge readings of Ban Se Bangfai and of That Phanom of the Period 1995-2000 has been used. The model delivered by LNMC with Consultants boundary conditions (lateral inflow derived from the series at Mahaxai according to equation (4.2)) gave a biased result (on average too high values: average difference for  $h > 140$  masl = 0.76 m) as is observed from Figure 4.24. To eliminate the bias the hydraulic roughness of the Se Bangfai downstream of Ban Se Bangfai has been changed (reduced) to the values displayed in Figure 4.6. The results are presented below.

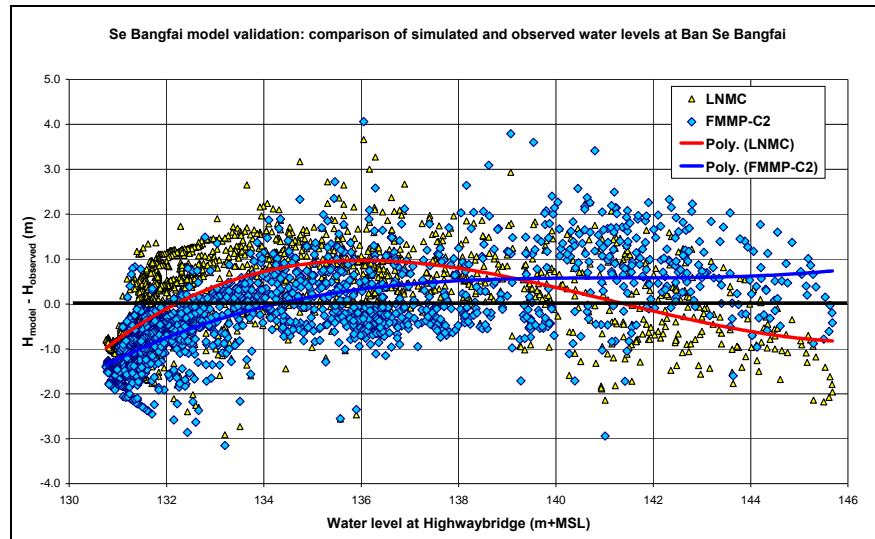


Figure 4.24 Error analysis of Se Bangfai hydraulic model calibration at Ban Se Bangfai, application of LNM-calibration

### Verification on levels at That Phanom

The performance of the model with the adjusted hydraulic roughness has been tested on the computed water levels at Ban Se Bangfai for the period 1995-2000. The results are presented in Figure 4.25 to Figure 4.30, and an error analysis is presented in Figure 4.31.

From Figure 4.25 to Figure 4.30 it is observed that in general the shape of the hydrographs are closely reproduced by the model, indicating that the applied procedure for the lateral inflow is acceptable as far as the water level at Highway Bridge 13S is concerned. The suitability of the model for design can be judged from the differences between the observed and computed water levels at Se Bangfai Bridge. The results for the years 1995-2000 have been summarised in Figure 4.31. From the figure it is observed that the overall model performance is unbiased for water levels > 135 masl values. Individual values, however, may deviate +/- 1.5 m. These differences are partly due to small shifts in the quick rising and falling of the hydrograph and are due to inaccuracies in the supplied tributary discharge. In this respect it is noted that a very high accuracy is not to be expected because about 45% of the discharge at Ban Se Bangfai is estimated via an approximate regression equation from the flow difference between Ban Se Bangfai and Mahaxai and not from a discharge rating curve. The quality of the model to determine the inundation depth and extent in the flood is still uncertain as detailed information on the extent of the flooding phenomenon is not available. Hence, there remains doubt on the ability of the model to properly describe the interaction between river and flood plain. It is strongly advocated to use a 1D-2D model for the lower Se Bangfai for appropriate simulation of the river-floodplain inter-action. This also simplifies the model set-up and calibration!

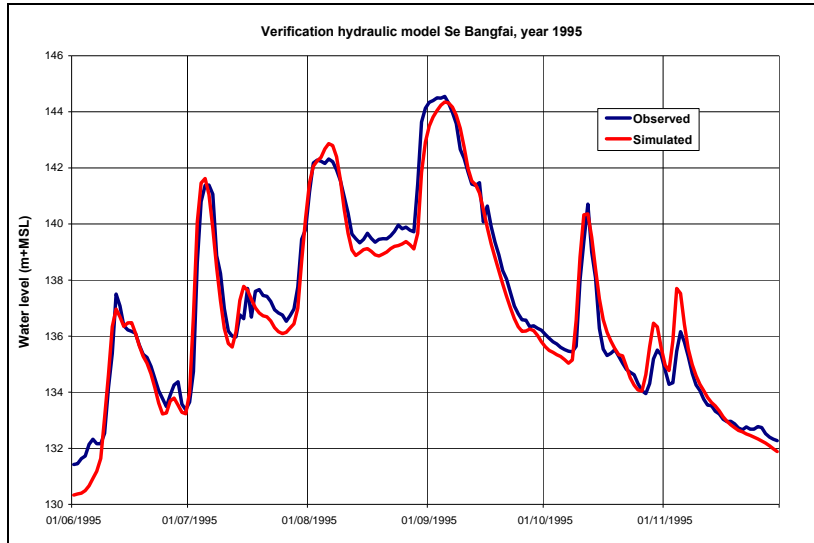


Figure 4.25 Model performance test, observed and simulated water level of 1995 at Ban Se Bangfai

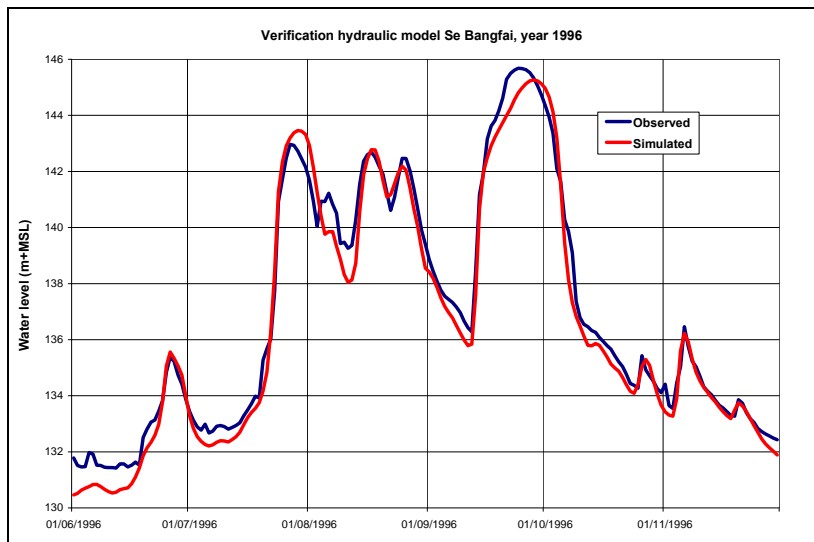


Figure 4.26 Model performance test, observed and simulated water level of 1996 at Ban Se Bangfai

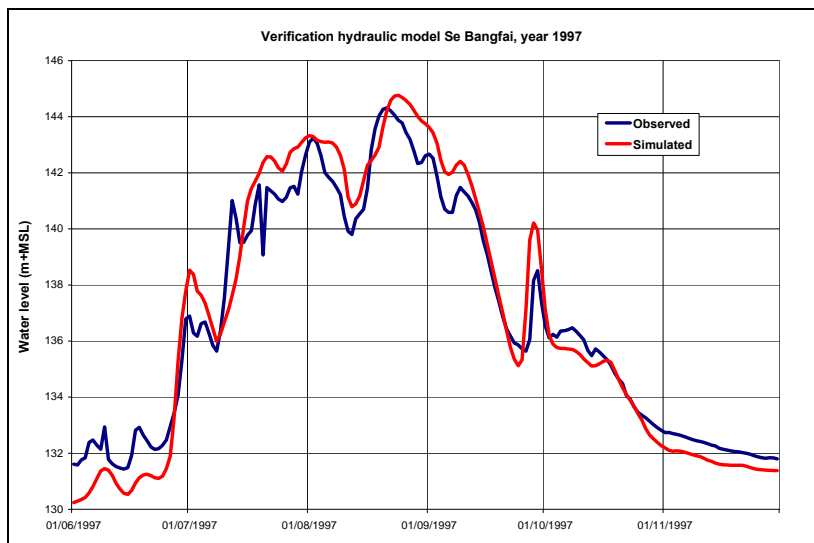


Figure 4.27 Model performance test, observed and simulated water level of 1997 at Ban Se Bangfai

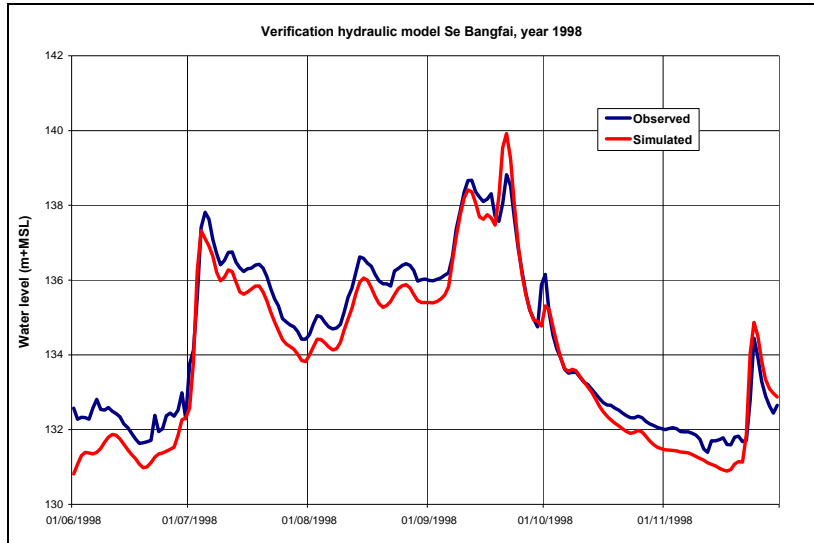


Figure 4.28 Model performance test, observed and simulated water level of 1998 at Ban Se Bangfai

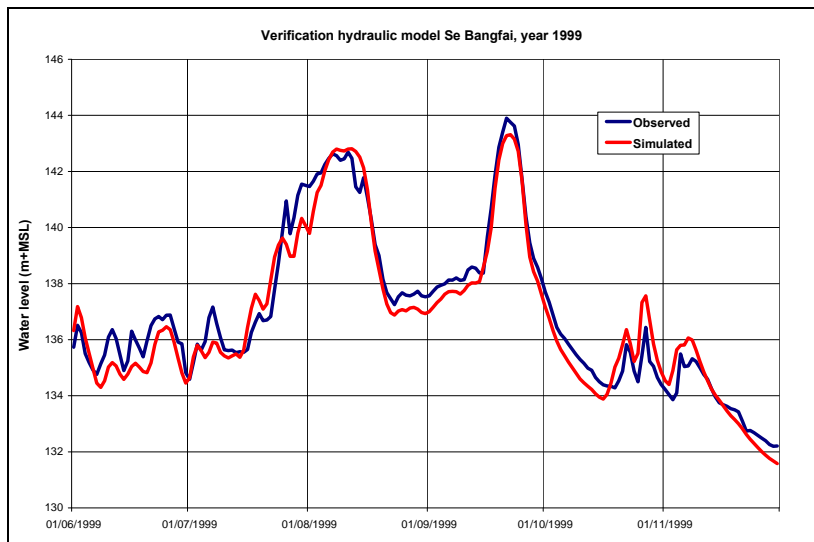


Figure 4.29 Model performance test, observed and simulated water level of 1999 at Ban Se Bangfai

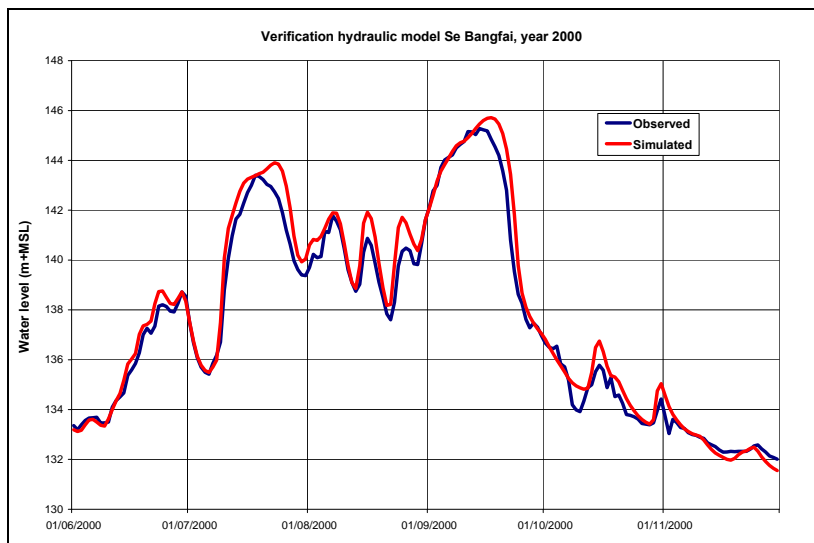


Figure 4.30 Model performance test, observed and simulated water level of 2000 at Ban Se Bangfai



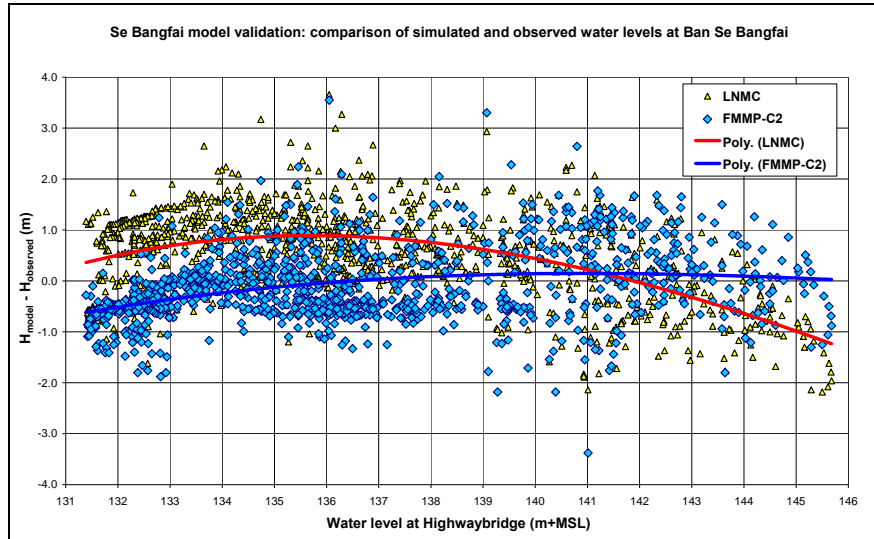


Figure 4.31 Error analysis of Se Bangfai hydraulic model calibration at Ban Se Bangfai

### Verification on levels at That Phanom

The computed water levels at That Phanom for the period 1995-2000 have been compared with observed ones as well. Some results are displayed in Figure 4.32 and Figure 4.33, whereas in Figure 4.34 an analysis is given of the model error. From the figures it is observed that a close match is obtained between model result and observations, with deviations generally less than 2 dm. This close match is to a large extent imposed by the water level boundary at Mukhdahan, which gives strong backwater effect on the stage at That Phanom.

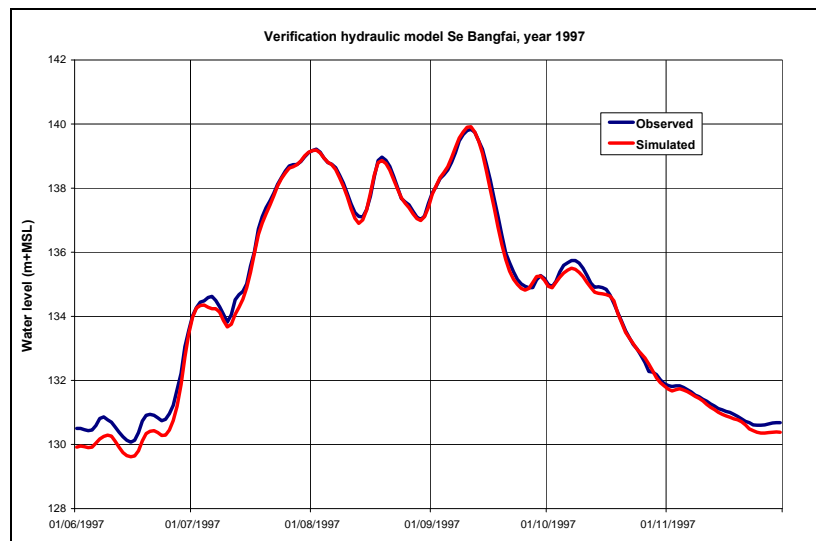


Figure 4.32 Model performance test, observed and simulated water level of 1997 at That Phanom

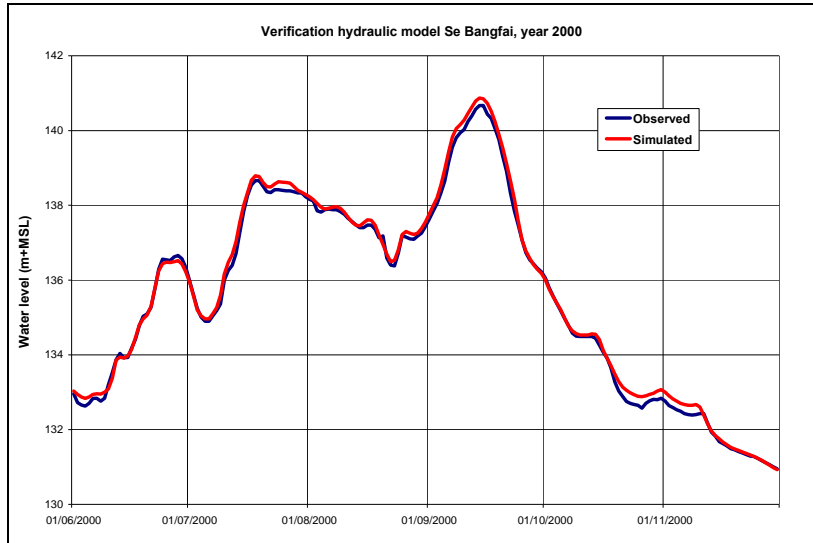


Figure 4.33 Model performance test, observed and simulated water level of 2000 at That Phanom

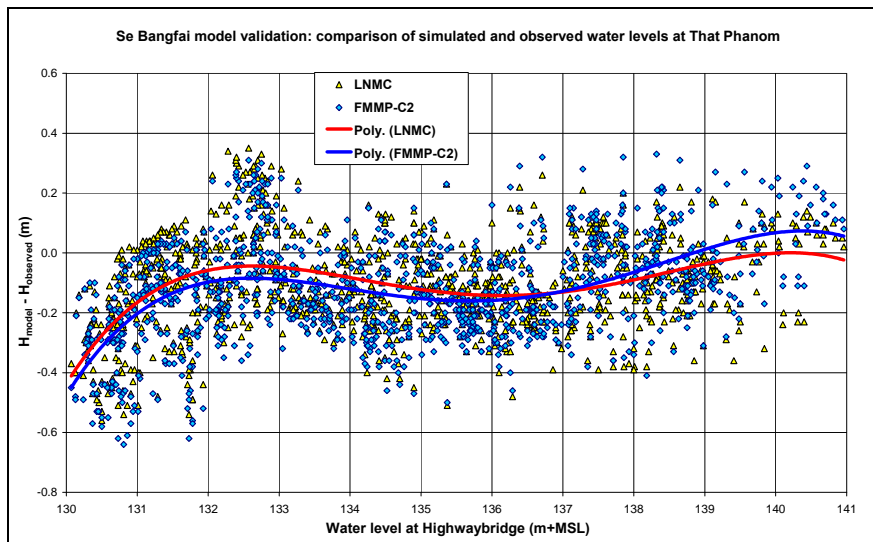


Figure 4.34 Error analysis of Se Bangfai hydraulic model calibration at That Phanom

## 5 Hydrological hazard assessment

### 5.1 General

For flood hazard assessment the water levels in the Se Bangfai between Mahaxai and the river mouth opposite That Phanom for distinct return periods ( $T = 2, 10, 25$  and  $100$  years) will have to be determined for which use will be made of the Monte Carlo procedure discussed in Chapter 2. The hydrological boundary conditions needed for the application of the procedure are presented in this chapter including their interrelation.

### 5.2 Peak discharge and flood volume Se Bangfai at Mahaxai

#### Peak discharge

Annual peak discharges in the Se Bangfai at Mahaxai in the period 1988-2006 ranged from  $834 \text{ m}^3/\text{s}$  in 1998 to  $2,548 \text{ m}^3/\text{s}$  in 2005, see Figure 5.1. The peak mainly occurs in the months August and September and occasionally in late June or July, as can be observed from Figure 5.2. The General Extreme Value distribution fits well to the observed annual peak discharges at Mahaxai, as shown in Figure 5.3. This distribution has the form:

$$F(x) = \exp \left\{ - \left( 1 - k \left( \frac{x-u}{\alpha} \right) \right)^{1/k} \right\} \quad (5.1)$$

where:  $F(x)$  = GEV distribution function  
 $k, \alpha, u$  = parameters of the distribution

The parameters as determined by probability weighted moments and the discharge values for distinct return periods are summarized in Table 5.1.

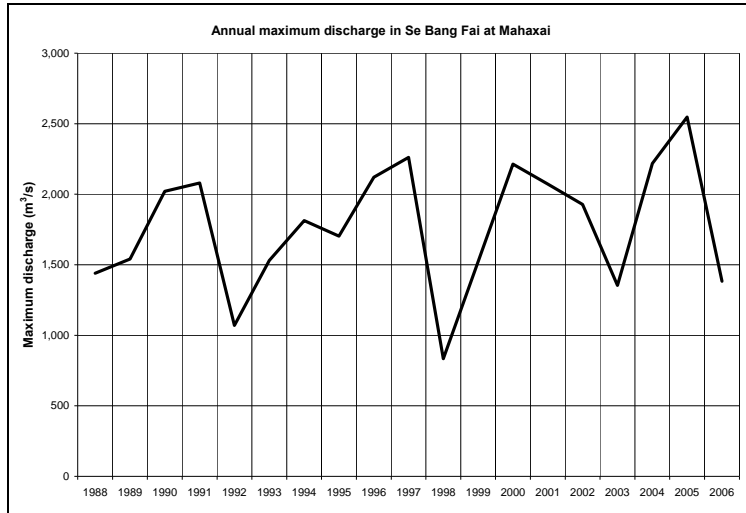


Figure 5.1 Annual maximum discharge in the Se Bangfai at Mahaxai, 1988-2006

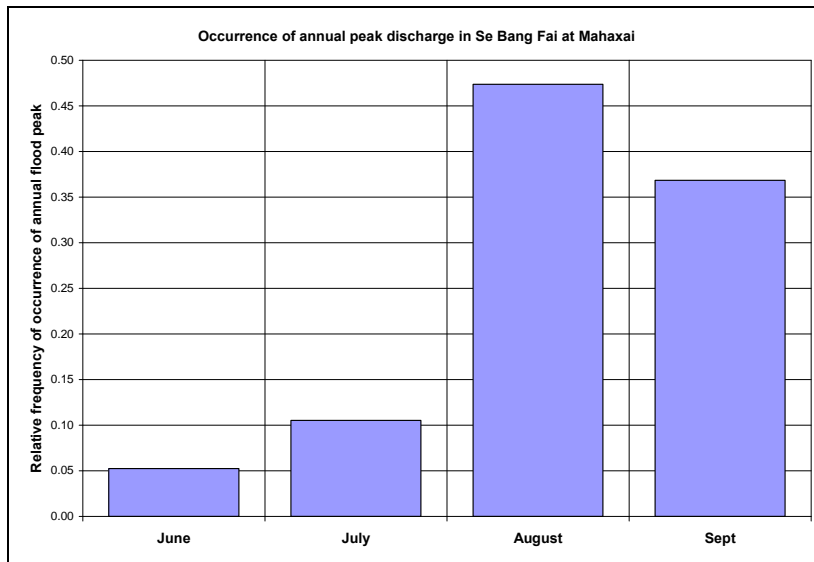


Figure 5.2 Occurrence of annual maximum discharge in the Se Bangfai at Mahaxai

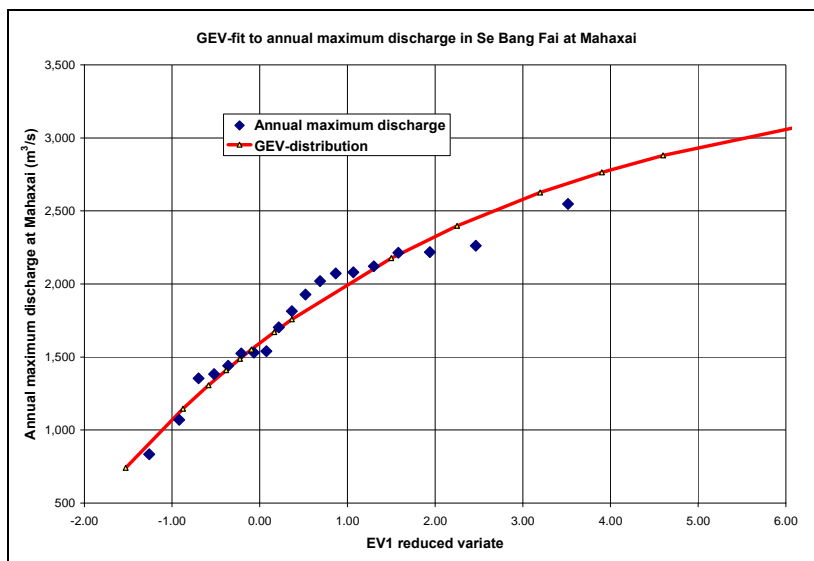


Figure 5.3 GEV-fit to annual maximum discharge in the Se Bangfai at Mahaxai

Table 5.1 GEV-parameters, peak-discharge and flood volumes for distinct return periods in the Se Bangfai at Mahaxai

Parameter	Peak discharge (m <sup>3</sup> /s)	Flood Volume (MCM)
k	0.341	0.221
$\alpha$	498	2,304
u	1,614	6,105
T (years)		
2	1,757	6,916
5	2,177	9,045
10	2,398	10,188
25	2,626	11,386
50	2,765	12,126
100	2,881	12,755

### Flood volumes

Similarly, the GEV-distribution fits well to the distribution of annual flood volumes in the Se Bangfai, see Figure 5.4. The annual flood volume is defined here as the volume in MCM occurring in the fixed period from 1 June till 30 November. A fixed time is needed here for proper reproduction of the occurrence of inundations in view of assessment of damage to crops. The parameters of the GEV-distribution and flood volumes for distinct return periods are summarized in Table 5.1.

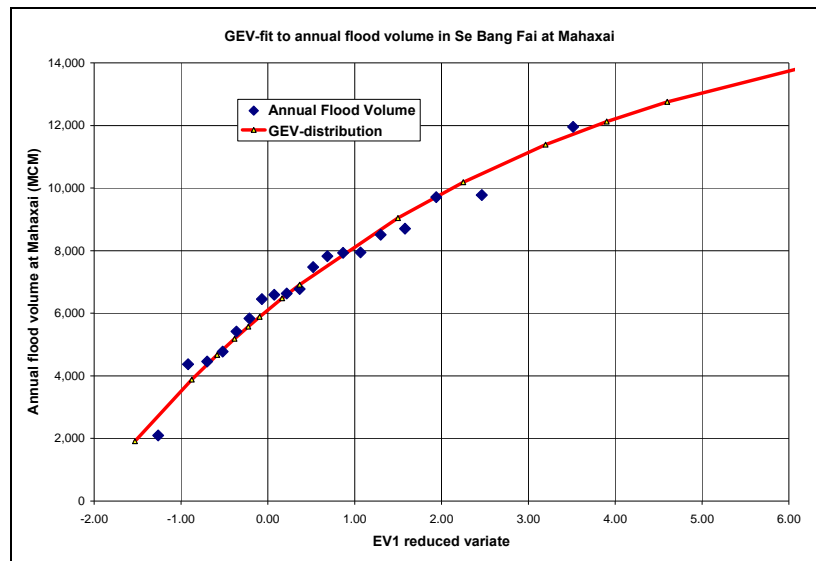


Figure 5.4 GEV-fit to annual flood volume in the Se Bangfai at Mahaxai

### Peak discharge – flood volume relation

For the flood hazard assessment with the Monte Carlo procedure for given flood volumes in the Mekong representative flood volumes in the Se Bangfai will be selected. Reference is made to Sub-section 5.4 for the relationship. To improve the selection among historical floods on the Se Bangfai its concurrent realistic peak value has to be known. This can be obtained from the relationship between peak discharges and flood volumes.

The relationship between peak discharge and flood volumes at Mahaxai is presented in Figure 5.5. From this figure it is observed that a fairly close relationship exists between the annual peak-discharge and the flood volume in the Se Bangfai at Mahaxai:

$$Q_{peak, Mahaxai} (m^3 / s) = 0.1734 V_{FV, Mahaxai} (MCM) + 556 \quad (R^2 = 0.78) \quad (5.2)$$

where: Q = peak discharge in (m<sup>3</sup>/s) at Mahaxai  
 V = flood volume in (MCM) at Mahaxai

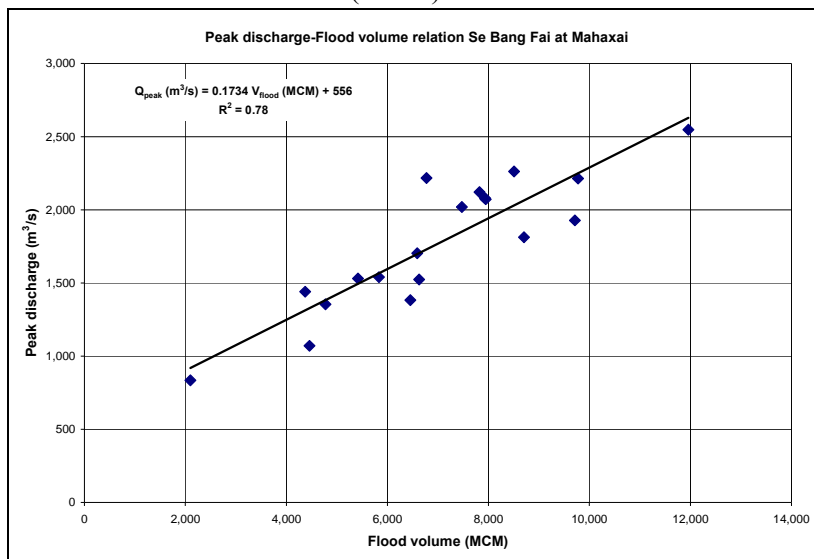


Figure 5.5 Relation between peak discharge and flood volume in the Se Bangfai at Mahaxai

## 5.3 Peak discharge and flood volume Mekong at Nakhon Phanom

### Marginal distributions of peak discharge and flood volume

Statistics of the discharge series of Nakhon Phanom on the Mekong are the key to the formulation of the Mekong boundary in the Monte Carlo procedure as is explained in Chapter 6. The statistics of the peak-flow and annual flood volume (from 1 June to 30 November) at Nakhon Phanom are discussed below. The annual maximum discharge in the Mekong at Nakhon Phanom is presented in Figure 5.6. The long term average annual peak flow amounts 26,049 m<sup>3</sup>/s with a standard deviation of 4,486 m<sup>3</sup>/s. The observed frequency distribution is well fitted by a GEV-distribution as shown in Figure 5.7. The distribution parameters and the peak flows for distinct return periods are presented in Table 5.2.

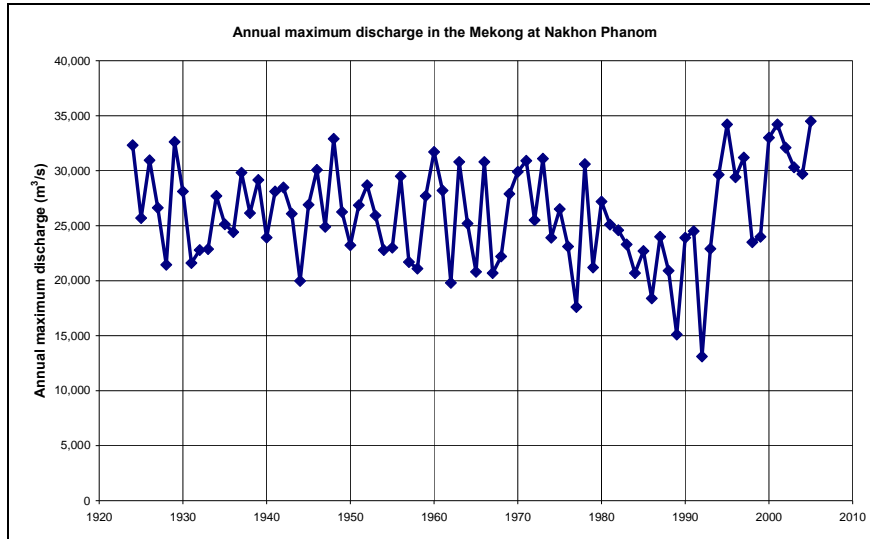


Figure 5.6 Annual maximum discharge in the Mekong at Nakhon Phanom, Period 1924-2005

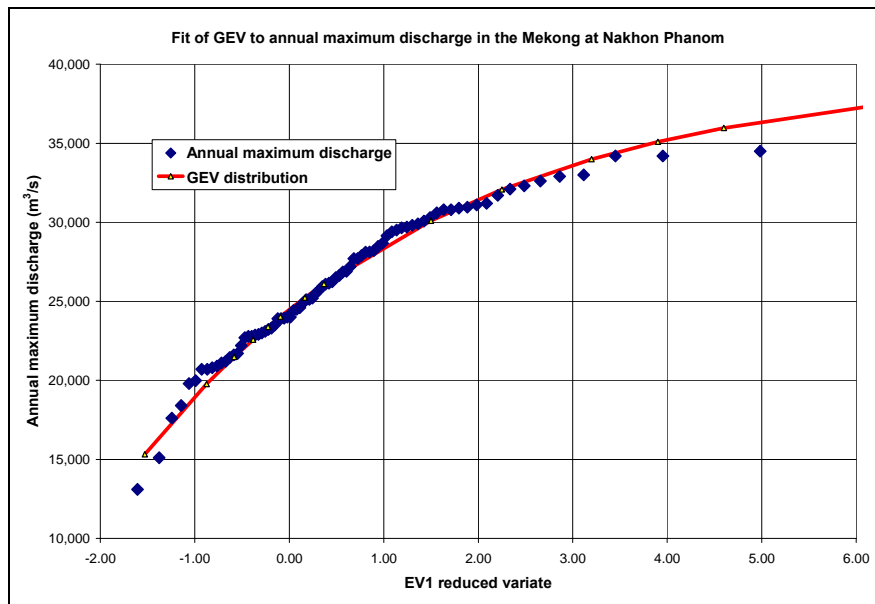


Figure 5.7 GEV-fit to marginal distribution of annual maximum discharge in the Mekong at Nakhon Phanom

The annual flood volumes, defined here as the flow volume between 1 June and 30 November, is displayed in Figure 5.8. Note that the recent years have been extremely voluminous. Like for the annual peak values, the GEV-distribution fits to the annual flood volumes. Distribution parameters and values for selected return periods are shown in Figure 5.9 and Table 5.2. An excellent fit is observed from the graph. The average flood volume amounts 203,895 MCM; the standard deviation is 35,952 MCM.

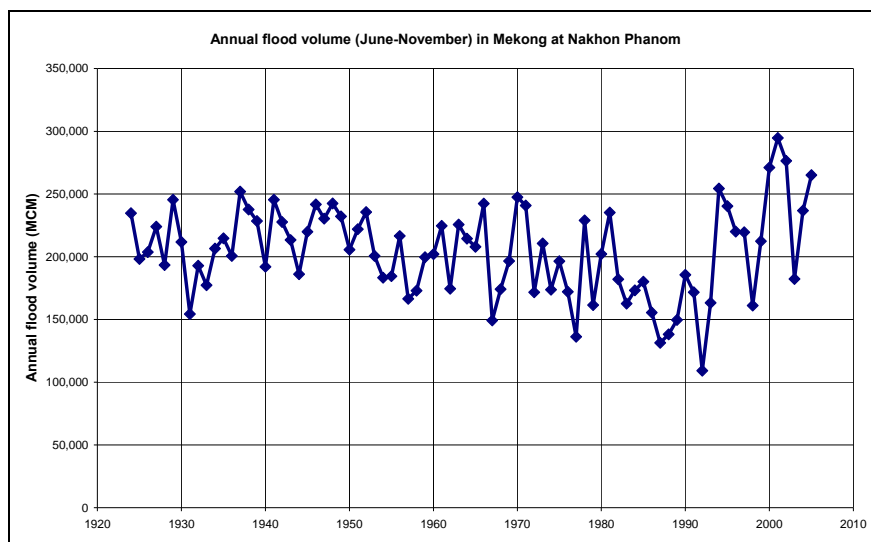


Figure 5.8 Annual flood volume (June-November) in Mekong at Nakhon Phanom, Period 1924-2005

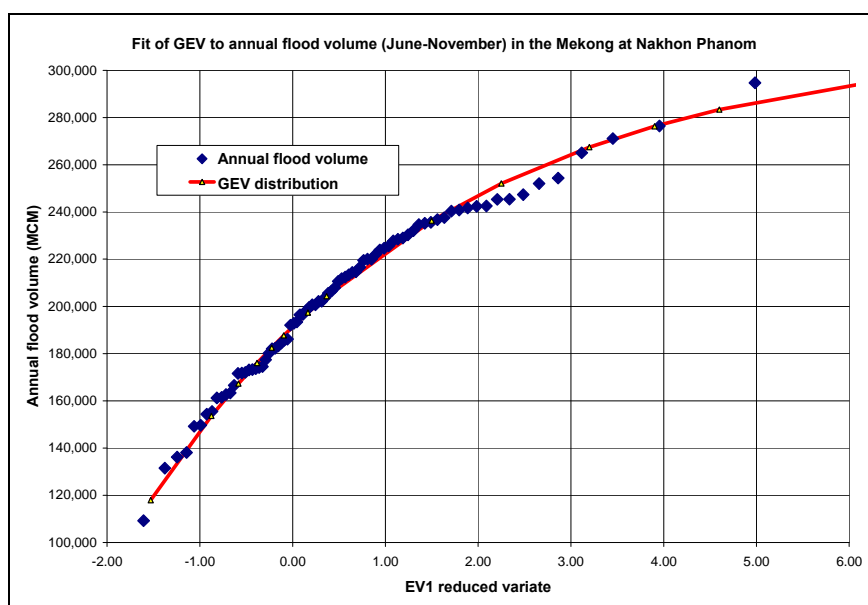


Figure 5.9 GEV-fit to marginal distribution of annual flood volume (June-November) in the Mekong at Nakhon Phanom

Table 5.2 GEV-parameters, peak-discharge and flood volumes (June-November) for distinct return periods in the Mekong at Nakhon Phanom

Parameter	Peak discharge (m <sup>3</sup> /s)	Flood Volume (MCM)
k	0.309	0.309
α	4,685	37,515
u	24,475	191,288
T (years)		
2	26,098	204,288
5	30,097	236,318
10	32,070	252,123
25	33,989	267,502
50	35,090	276,328
100	35,970	283,382



### Bivariate distribution of peak discharge and flood volume

The bivariate extreme value distribution of flood peaks and flood volumes has been described by Adamson et al. (1999). The joint probability can be generated by the Gibbs sampler Monte Carlo procedure. This technique requires that annual flood peaks (X) and annual flood volumes (Y) are regressed against each other:

$$\begin{aligned} X &= a_{x,y} + b_{x,y}Y \\ Y &= a_{y,x} + b_{y,x}X \end{aligned} \tag{5.3}$$

and the GEV distributions are used to model the residuals of flood peaks and flood volumes with parameters respectively  $(u_x, \alpha_x, k_x)$  and  $(u_y, \alpha_y, k_y)$ . The Gibbs procedure then reads with uniform distributed random numbers R and the generated values marked with #:

$$\begin{aligned} X_j^\# &= a_{x,y} + b_{x,y}Y_j^\# + u_x + \frac{\alpha_x}{k_x} \left\{ 1 - (-\ln(R_1))^{k_x} \right\} \\ Y_{j+1}^\# &= a_{y,x} + b_{y,x}X_j^\# + u_y + \frac{\alpha_y}{k_y} \left\{ 1 - (-\ln(R_2))^{k_y} \right\} \end{aligned} \tag{5.4}$$

The relation between flood volume and peak flow and vice versa is depicted in Figure 5.10, with the coefficients of the equations (5.3) presented in Table 5.3.

Table 5.3 Regression parameters and parameters of GEV distributions of regression residuals for the peak flows and flood volumes of the Mekong at Nakhon Phanom

Regression	Regression parameters		GEV parameters of regression residuals		
Peak on volume	$a_{y,x}=4,902$	$b_{y,x}=0.1037$	$u_y = -973.7$	$\alpha_y = 2,332$	$k_y = 0.1944$
Volume on peak	$a_{x,y}=30,353$	$b_{x,y}=6.6622$	$u_x = -6,738$	$\alpha_x = 19,951$	$k_x = 0.3063$

The GEV-fit to the residual peak discharges and flood volumes is presented in Figure 5.11 and Figure 5.12. The parameters are shown in Table 5.3.

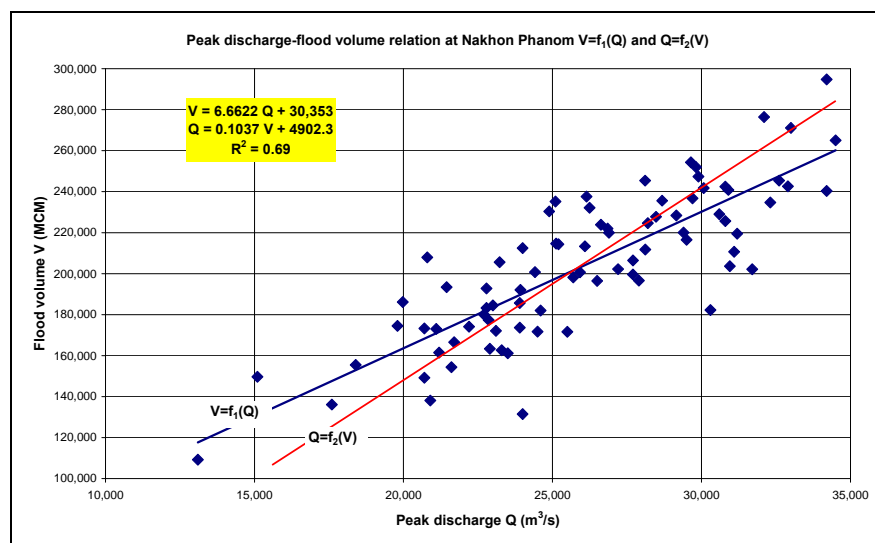


Figure 5.10 Flood volume – peak discharge relations for the Mekong at Nakhon Phanom

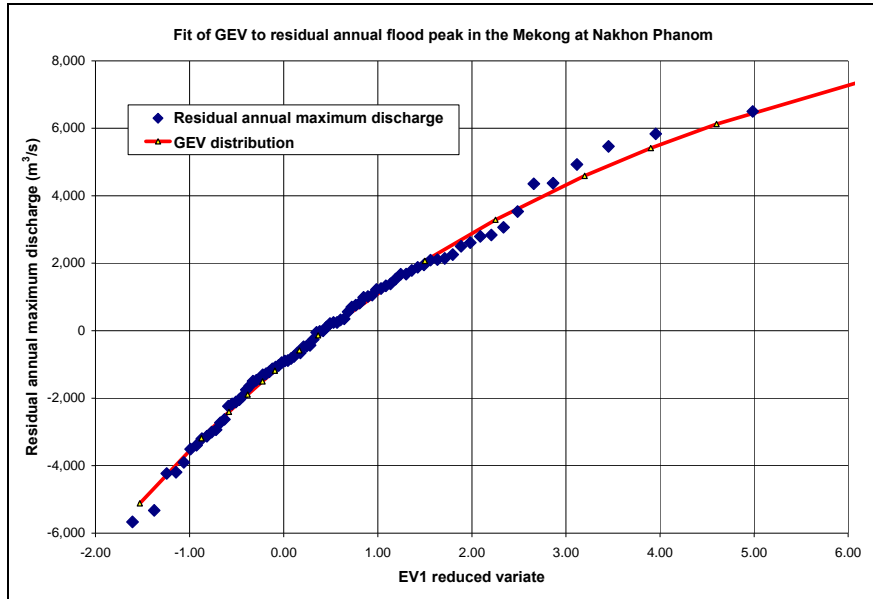


Figure 5.11 GEV-fit to residual annual peak discharge, Mekong at Nakhon Phanom

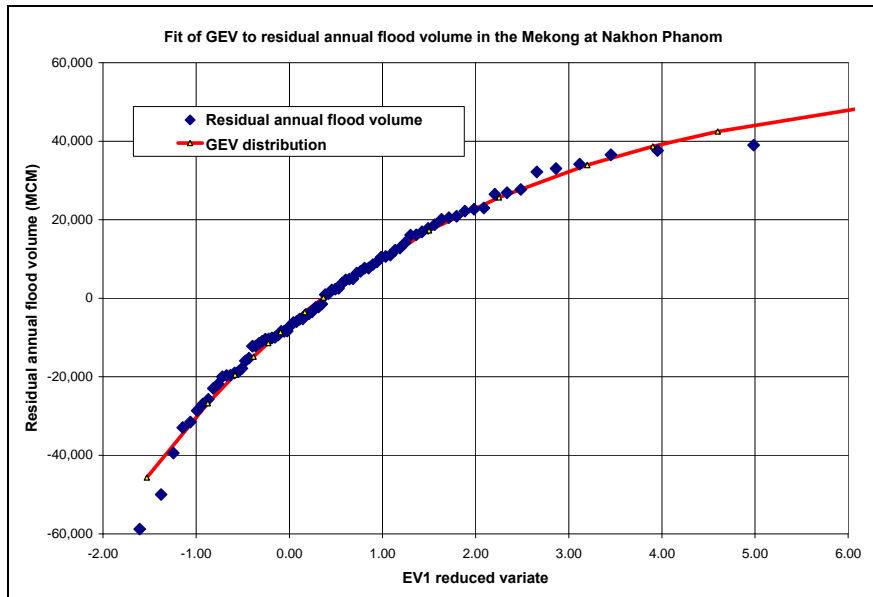


Figure 5.12 GEV-fit to residual flood volume, Mekong at Nakhon Phanom

## 5.4 Se Bangfai–Mekong correlation

Another aspect that is of importance in selecting samples for the Monte Carlo procedure is the correlation between flood volumes on the Se Bangfai and on the Mekong and between discharge peaks on both rivers.

The flood volume in the Se Bangfai is correlated with the flood volume in the Mekong, as shown in Figure 5.13. The relation between the flood volumes is given by:

$$V_{Mahaxai}(MCM) = 0.0335 V_{NakhonPhanom}(MCM) + 52.8 \quad (R^2 = 0.58) \quad (5.5)$$

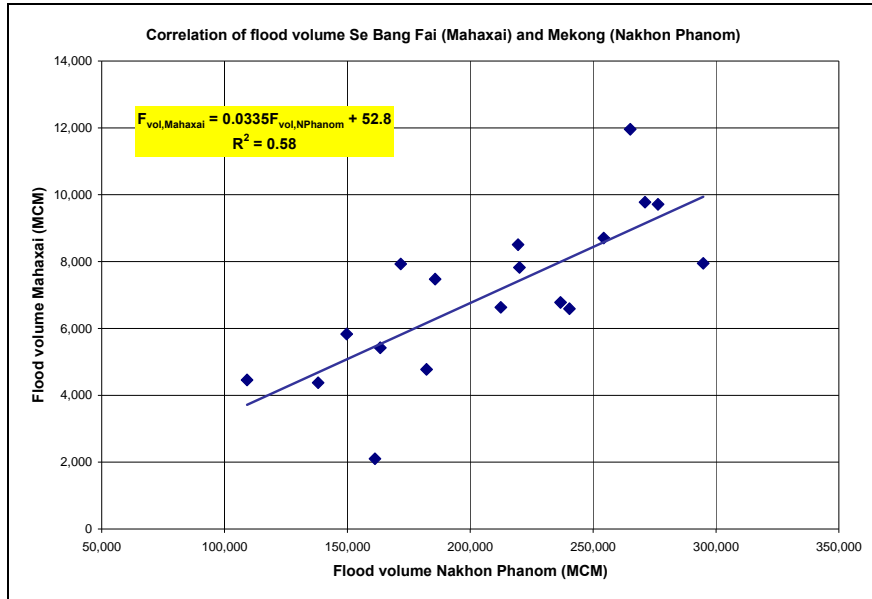


Figure 5.13 Relation between flood volume in the Se Bangfai at Mahaxai and in the Mekong at Nakhon Phanom

The correlation between the peak flows at Mahaxai and at Nakhon Phanom is also significant but less close than between the volumes:

$$Q_{peak,Mahaxai} (m^3 / s) = 0.0436 Q_{peak,NakhonPhanom} (m^3 / s) + 561 \quad (R^2 = 0.42) \quad (5.6)$$



6. Scaling of Se Bangfai series to match with the required flood volume, and final adjustment based on peak discharges.
7. For the Nam Theun 2 scenario: add 220 m<sup>3</sup>/s to the discharge at Mahaxai.
8. Computation of total lateral inflow using equation (4.2), and
9. Partitioning of the lateral inflow between Se Noy (44%), Q81 (29%), Q38 (15%) and Q35 (11%) as proposed by the LNMC & MRC modelling teams.

With this procedure  $6 \times 5 \times 3 = 90$  flood seasons have been created to represent the full gamma of physically realistic water level/discharge combinations as input for the Monte Carlo simulation procedure.

Monte Carlo simulations have been executed to derive exceedance frequencies of water levels along the Se Bangfai river at every grid cell. The error introduced by the Monte Carlo techniques decreases with increasing number of samples. Therefore, a relatively large amount of 100,000 samples was taken to make sure errors were small. To test if this is indeed the case, two successive Monte Carlo runs were executed, and results were compared. It turned out that the absolute difference in resulting 100-year water levels between the two runs differed at maximum two centimetres for all locations in the river, which is negligible.

## 6.3 Simulation results

### 6.3.1 Cases

Hydraulic model and Monte Carlo simulations were executed for three different schematisations (“cases”) of the river system:

Case 1: situation with no embankments, i.e. the river conditions till 2002;

Case 2: situation with embankments along the left bank, which are the present conditions;

Case 3: situation with embankments on both banks, i.e. the planned layout.

In the Cases 2 and 3 the embankments are situated along the stretch from the Se Bangfai Highway Bridge down to the confluence with the Mekong river.

### 6.3.2 Water levels in the Se Bangfai river

#### Performance test

For each location along the river and the flood plain exceedance frequency distribution of water levels have been obtained with the Monte Carlo procedure by interpolation between the results obtained with the hydraulic model. Figure 6.1 shows an example of an exceedance frequency distribution for model node XBFi-9822, near Mahaxai station, as derived from the Monte Carlo simulations. These results are for the situation with no embankments along the river. The figure consists of a large number of dots, each representing a threshold value for which the exceedance probability is derived. The thresholds are all multiples of a centimetre, i.e. the vertical distance between neighbouring dots is exactly one centimetre. For each of these threshold values the exceedance probability is computed in the straightforward crude Monte Carlo manner: the number of exceedances

is counted and this number is divided by the total number of simulations (100,000). So for example in case of Figure 6.1 the threshold water level of 154.5 m+MSL is exceeded 1,000 times, which gives a probability of exceedance of  $1,000/100,000 = 1/100$  per year. In other words: for location XBFi-9822 the 100-year water level is equal to 154.5 m+MSL.

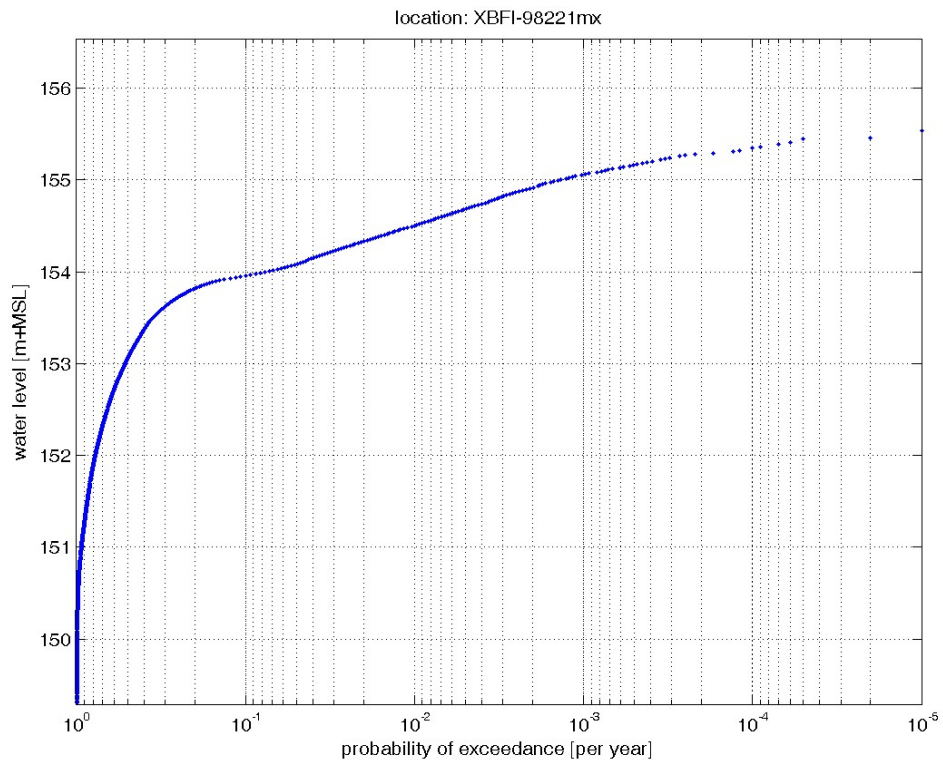


Figure 6.1 Derived flood frequency distribution of water levels at location XBFi-9822, near Mahaxai station; case with no embankments

The performance of the procedure in reproducing the observed water level distribution at Ban Se ban Fai/ Highway bridge mouth is shown in Figure 6.2. For return periods larger than 2 a proper reproduction is observed. Figure 6.3 shows a similar plot for the upstream discharge at Mahaxai. Again, the observed discharges and corresponding return periods are well reproduced by the model. It implies that the boundary conditions as generated by the Monte Carlo procedures are sound.

Comparisons with measurements at the river mouth are a bit more complex, since the Mekong river is morphologically very active. Observed water levels are therefore strongly influenced by the varying bottom level of the Mekong river. To make a fair comparison with between the derived flood hazard statistics and observed water levels, the “observed” water levels at the Se Bangfai river mouth were derived as follows:

- Derive annual maximum discharges at Mukdahan
- Derive annual maximum water levels at Mukdahan by applying the stage discharge relation of Figure 4.20
- Derive annual maximum water levels at That Phanom (Se Bangfai river mouth) by applying an h-h relation that is derived from the hydraulic model.

For the resulting annual maximum water levels at that Phnom, exceedance frequencies are derived and compared with the results of the flood hazard assessment (Figure 6.4). Again results are in accordance.

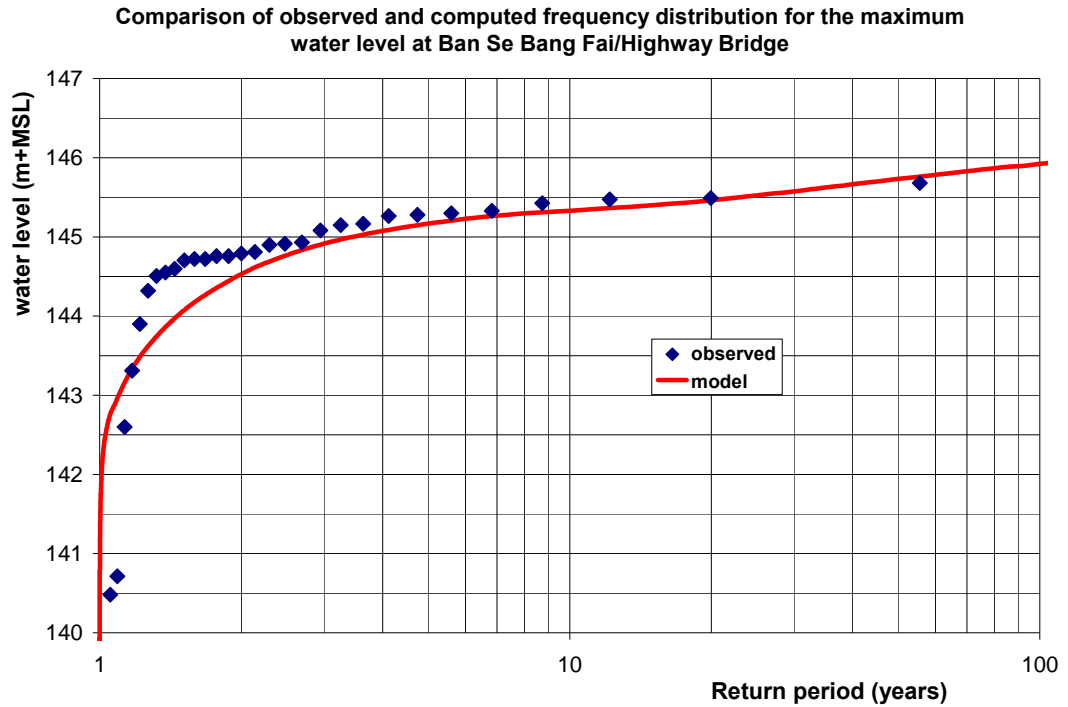


Figure 6.2 Comparison of observed and computed frequency distribution of the annual maximum water level at Se Bangfai Highway Bridge

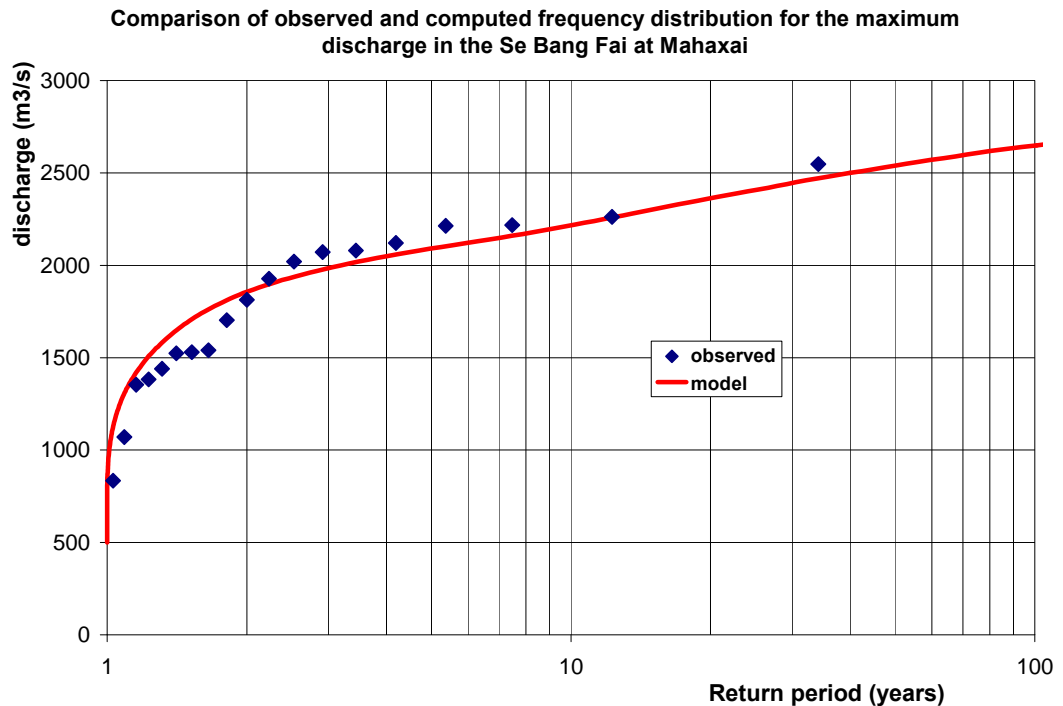


Figure 6.3 Comparison of observed and computed upstream discharge at Mahaxai.

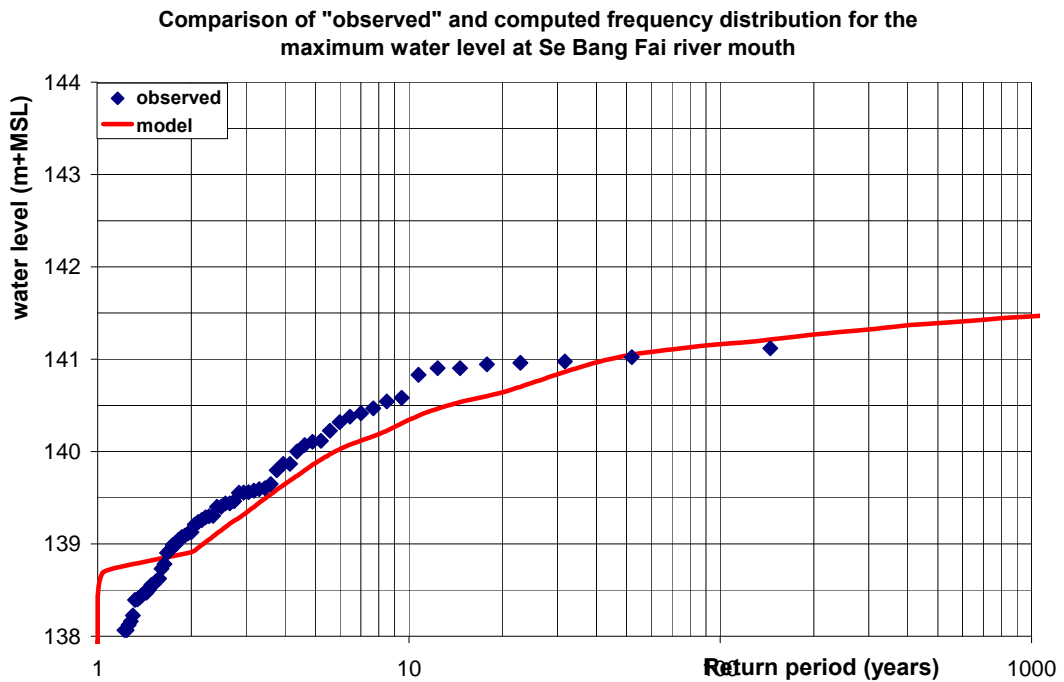


Figure 6.4 Comparison of observed and computed frequency distribution of the water level at the **river mouth**

### Comparison of development cases

Based on the method described above, the 2, 10, 25 and 100-year water levels have been derived for all locations along the lower reach of the Se Bangfai River. Figure 6.5 shows the results for Case 1 (no embankments). The horizontal axis shows the distance along the river to the downstream boundary, i.e. the confluence with the Mekong river. The location on the far right is the upstream boundary of the model, and it is located approximately 3 km upstream of the Mahaxai gauge. The location to the far left is the confluence of the Se Bangfai with the Mekong at That Phanom. Figure 6.6 shows a similar figure for Case 3 (embankments on both sides).



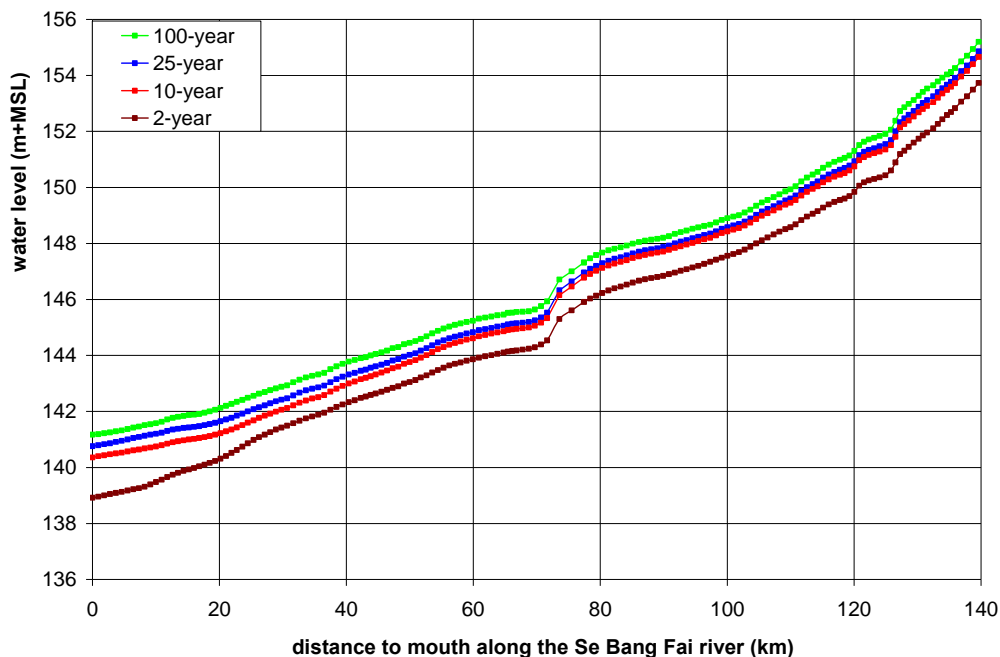


Figure 6.5 Computed 2, 10, 25 and 100-year flood level along the Se Bangfai river for the case with no embankments.

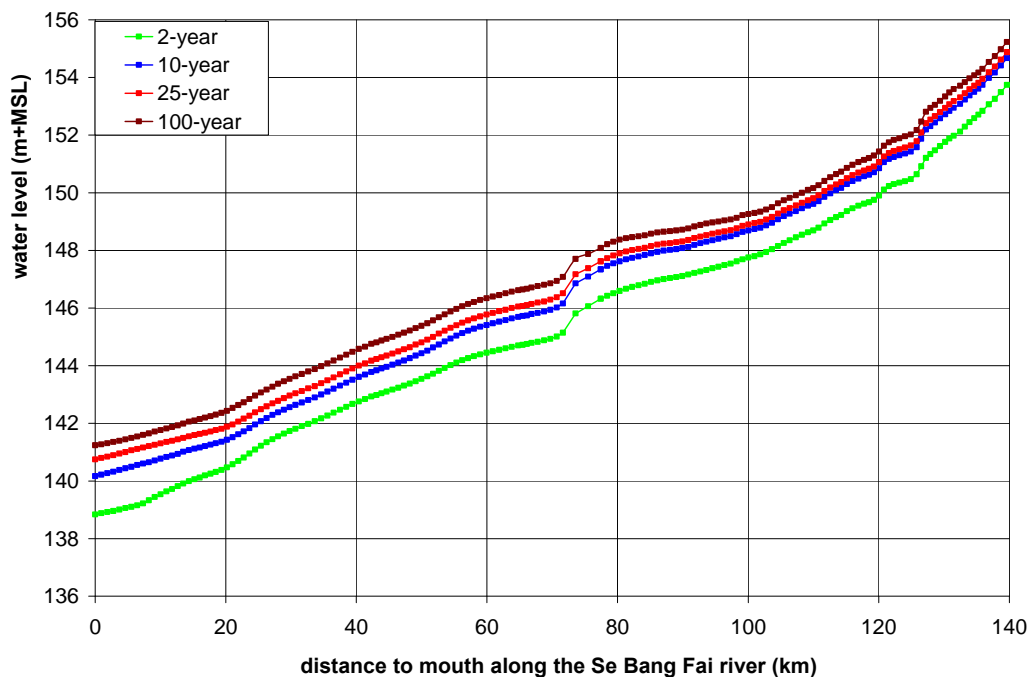


Figure 6.6 Computed 2, 10, 25 and 100-year flood level along the Se Bangfai river for the case with embankments on both sides of the river.

Figure 6.7 shows the results for the three simulated situations of the river. Figure 6.8 shows the mutual differences in 100-year water level between the three cases. From the figures it can be seen that differences are negligible at both the upstream and downstream model boundary. For the upstream boundary this is because it is outside the backwater reach of the location where the embankments begin (at Highway Bridge 13S). At the downstream end differences are small because the flow in the Mekong dominates the water levels and therefore water levels are not influenced by the embankments along the Se Bangfai. Moving

to the middle sections, differences are increasing, being at maximum around 70 kilometres from the river mouth. The embankments cause water to stay in the river and keep the flood plains dry. As a result, water levels in the river rise higher than in case of the situation with no embankments. For the 100-year water level the embankments cause a maximum rise in water level of 1.2 m.

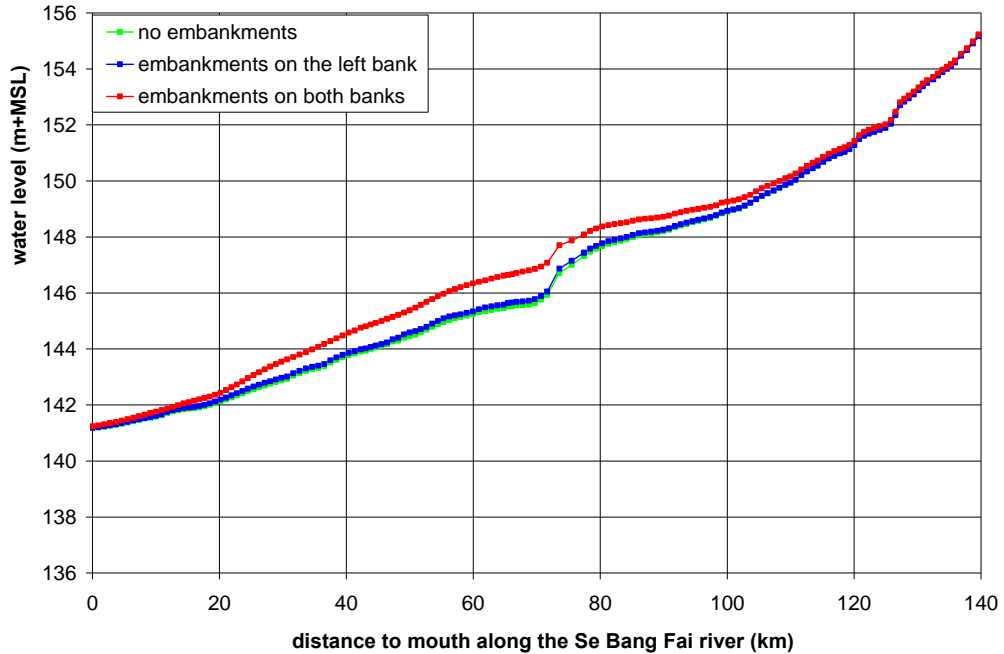


Figure 6.7 Computed **100-year** flood level along the Se Bangfai river for the cases with [a] no embankments [b] embankments along the left bank and [c] embankments along both banks.

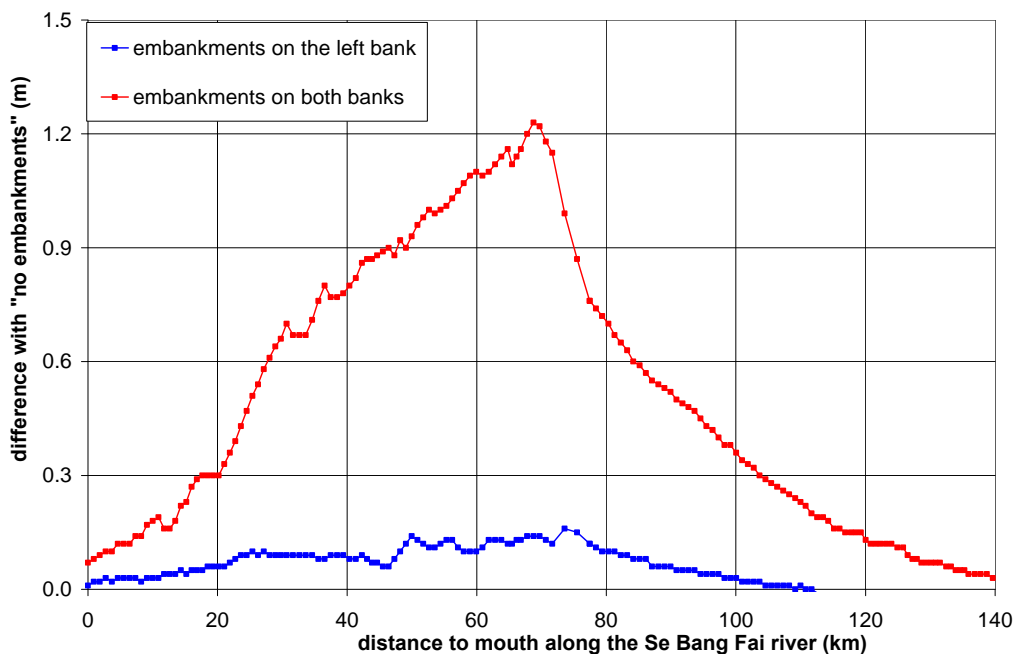


Figure 6.8 Differences in the computed **100-year** flood level along the Se Bangfai river for Cases 2 and 3 relative to case 1, the Base Case.

## 6 Flood hazard assessment

### 6.1 General

The floods in the lower Se Bangfai are classified as combined floods. The hazard assessment procedure for combined floods was outlined in Chapter 2. The flood hazard is derived from the hydrological hazard, described in Chapter 5.

The steps used to derive the flood hazard from the hydrological hazard using the hydraulic model and subsequently applying the Monte Carlo technique is outlined in Sub-section 6.2. The flood hazard will be determined for:

1. the base case, i.e. without embankments along the lower Se Bangfai
2. the situation with embankments dikes along the left bank of the lower Se Bangfai.
3. the situation with embankment along both banks of the lower Se Bangfai.
4. the situation with a diversion canal from the Se bang fai, 25 downstream of ban Se Bangfai, to the Mekong river. The results are presented in Sub-section 6.3. The resulting flood maps are presented in Sub-section 6.4. Finally the effect of a bypass canal from the lower Se Bangfai to the Mekong, which as a shortcut for discharge of floodwater., on the flood levels have been investigated in Sub-section 6.5.

### 6.2 Applied boundary conditions

The procedure used to derive the boundary conditions for the hydraulic model as input to the Monte Carlo method has been:

1. Selection of 5 flood volumes (very low, low, medium, high and very high) at Nakhon Phanom for 6 different peak discharge levels with return periods of  $T = 2, 5, 10, 25, 50$  and 100 years. Use is made of the regression relation between flood volume and peak flow, described Chapter 5, Table 5.3:
  - very low = regression –  $1.96 \times S_e$  ( $S_e$  = standard error about regression)
  - low = regression –  $1 \times S_e$
  - medium = regression
  - high = regression +  $1 \times S_e$
  - very high = regression +  $1.96 \times S_e$ .The standard error about regression for Nakhon Phanom  $S_{eNP} = 19,987$  MCM
2. Selection of discharge hydrographs of the Mekong at Nakhon Phanom with volumes close to those computed in Step 1.
3. Adjustment of selected historical discharge hydrographs to fit into the scheme of step 1.
4. Using equation (5.5), generation of 3 corresponding flood volumes in the Se Bangfai for each selected flood volume at Nakhon Phanom:
  - low = regression –  $1.96 \times S_e$ ,
  - medium = regression, and
  - high = regression +  $1.96 \times S_e$ .The standard error about regression for Mahaxai  $S_{eM} = 1,524$  MCM

5. Selection of hydrographs in the Se Bangfai series with volumes close to those computed in Step 4.

### 6.3.3 Water levels in the floodplains

Similar analyses as in the previous section have been executed for the floodplains adjacent to the Se Bangfai river. In the hydraulic model, nodes are defined to represent different floodplain areas. Each node is modelled as a reservoir. For each node the water levels with return periods 2, 10, 25 and 100 years have been derived, and this is repeated for each of the three cases. Figure 6.9 shows the rivers Se BangFai and Mekong in combination with all the floodplain nodes of the Hydraulic model. The nodes have been divided into four different groups:

- Green points: locations in the right floodplain, downstream of the measures
- Light blue points: locations in the left floodplain, downstream of the measures
- Black points: locations in the right floodplain, upstream of the measures
- Red points: locations in the left floodplain, upstream of the measures

The reason for this division is that the protection measures are mainly designed to protect the areas downstream (i.e. the green and blue location). Furthermore, the measure “left bank” is designed to protect the area on the left (blue locations).

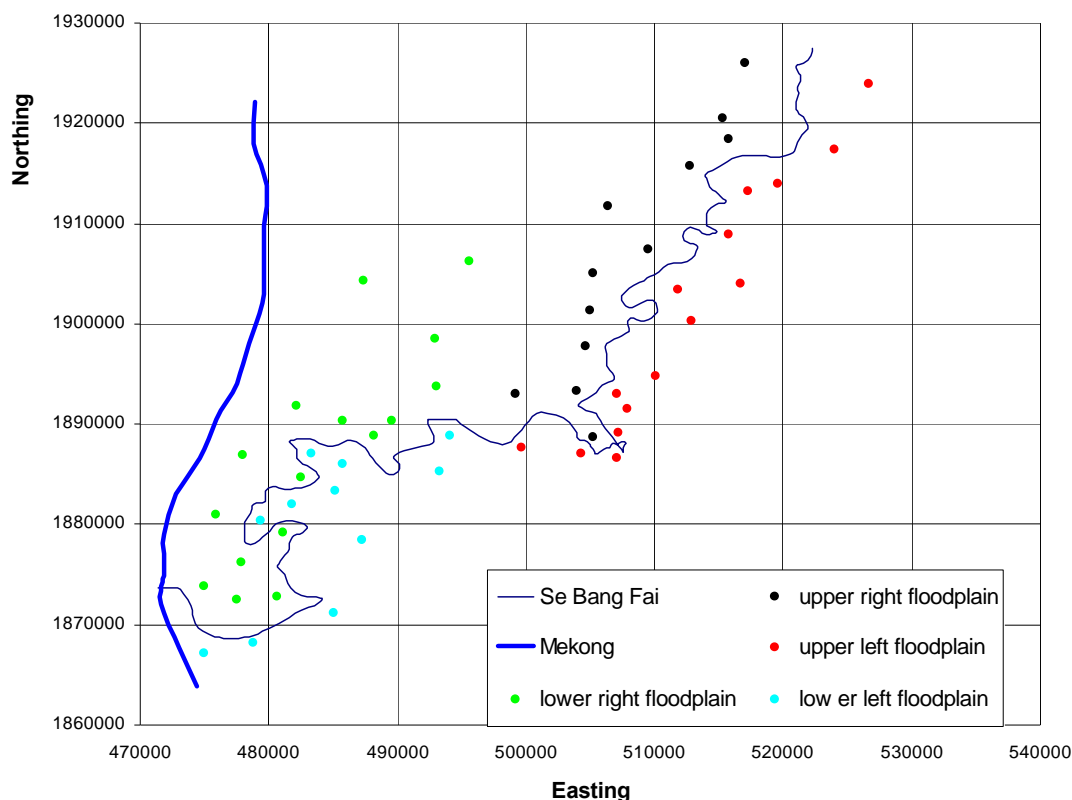


Figure 6.9 Rivers Se BangFai and Mekong and floodplain nodes of the Hydraulic model

Table 6.1 shows [a] the resulting water levels for the situation of no embankments [b] the change in water levels in comparison with situation [a] as result of embankments on the left side and [c] the change in water levels in comparison with situation [a] as result of embankments on both sides. The locations in this table are the ones downstream of the measures (i.e. green and light blue locations of Figure 6.9). Table 6.2 shows similar numbers for the locations upstream of the measures (i.e. red and black locations of Figure 6.9).

The effects of embankments are clearly visible from the results; the embankment protect the downstream floodplains but back up the water further upstream. The situation with only embankments on the left is profitable for the floodplain locations on the left (light blue points) but disadvantageous for locations on the right (green locations).

It is noted that the values presented in the table have to be used with care in view of the uncertainties in the hydraulic model, particularly with respect to the interaction between river and flood-plain. The results are no more then indicative and should not be used for design.

Table 6.1 Water levels and changes in water levels with return periods of 2, 10, 25 and 100 years in the floodplains of the Se Bangfai river basin; locations **downstream** of embankments.

node	no embankments				change in water level as a result of embankments on the left bank				change in water level as a result of embankments on both banks			
	2	10	25	100	2	10	25	100	2	10	25	100
<b>Right bank (green locations of Figure 6.9)</b>												
SP246nD	143.99	144.89	145.10	145.51	-0.21	0.03	0.07	0.13	-1.38	-2.28	-2.49	-2.90
SP202D	144.15	144.92	145.12	145.52	-0.05	0.05	0.08	0.13	-2.66	-3.43	-3.63	-4.03
SP226D	144.01	144.76	144.97	145.37	-0.04	0.05	0.07	0.12	-2.60	-3.35	-3.56	-3.96
SP227D	143.49	144.36	144.59	145.01	-0.05	0.05	0.07	0.12	-2.44	-3.31	-3.54	-3.96
SP245D	142.99	143.72	143.99	144.43	-0.06	0.05	0.07	0.13	-5.20	-5.93	-6.20	-6.64
SP245nD	141.34	141.73	142.30	143.32	0.01	0.10	0.19	0.34	-0.08	-0.47	-1.04	-2.06
SP248D	144.10	144.92	145.12	145.52	-0.05	0.05	0.08	0.13	-2.05	-2.87	-3.07	-3.47
SP261D	142.85	143.56	143.83	144.26	-0.07	0.03	0.05	0.09	-1.80	-2.51	-2.78	-3.21
SP266D	142.10	142.76	143.11	143.60	-0.11	0.02	0.04	0.09	-3.06	-3.72	-4.07	-4.56
SP284U	142.28	142.96	143.28	143.75	-0.12	0.01	0.04	0.09	-1.91	-2.59	-2.91	-3.38
SP295D	141.76	142.39	142.74	143.20	-0.11	0.01	0.03	0.09	-3.75	-4.37	-4.72	-5.18
SP307D	141.16	141.61	141.89	142.29	-0.09	0.01	0.02	0.06	-1.17	-1.62	-1.90	-2.30
SP312U	140.98	141.63	142.00	142.48	-0.08	0.00	0.04	0.08	-0.96	-1.61	-1.98	-2.46
SP343D	139.75	140.92	141.37	141.80	-0.11	-0.07	0.00	0.04	-2.76	-3.93	-4.38	-4.81
SP361D	139.35	140.68	141.13	141.50	-0.07	-0.13	-0.03	0.03	-1.34	-2.67	-3.12	-3.49
SP376D	139.17	140.48	140.93	141.30	-0.02	-0.22	-0.05	0.03	-0.11	-1.42	-1.87	-2.24
<b>Left bank (light blue locations of Figure 6.9)</b>												
SP201D	144.15	144.92	145.12	145.52	-4.16	-4.93	-5.13	-5.53	-4.16	-4.93	-5.13	-5.53
SP219D	143.14	144.57	144.83	145.28	-2.50	-3.93	-4.19	-4.64	-2.50	-3.93	-4.19	-4.64
SP238D	141.22	143.58	144.00	144.66	-2.30	-4.66	-5.08	-5.74	-2.30	-4.66	-5.08	-5.74
SP258D	142.75	143.49	143.76	144.20	-2.70	-3.44	-3.71	-4.15	-2.70	-3.44	-3.71	-4.15
SP277D	136.06	137.66	139.27	141.61	-0.65	-2.25	-3.86	-6.20	-0.65	-2.25	-3.86	-6.20
SP285D	135.42	136.45	137.94	140.22	-0.01	-1.04	-2.53	-4.81	-0.01	-1.04	-2.53	-4.81
SP286D	139.87	140.93	141.56	142.14	-0.21	-1.27	-1.90	-2.48	-0.21	-1.27	-1.90	-2.48
SP300D	137.67	138.02	138.84	140.56	0.00	-0.35	-1.17	-2.89	0.00	-0.35	-1.17	-2.89
SP344D	139.56	140.80	141.38	141.84	-0.07	-1.31	-1.89	-2.35	-0.07	-1.31	-1.89	-2.35
SP362D	138.91	140.34	141.07	141.49	-0.03	-1.46	-2.19	-2.61	-0.03	-1.46	-2.19	-2.61
SP375D	133.80	135.50	137.85	139.90	-0.01	-1.71	-4.06	-6.11	-0.01	-1.71	-4.06	-6.11

Table 6.2 Water levels and changes in water levels with return periods of 2, 10, 25 and 100 years in the floodplains of the Se Bangfai river basin; locations **upstream** of embankments.

node	no embankments				change in water level as a result of embankments on the left bank				change in water level as a result of embankments on both banks			
	2	10	25	100	2	10	25	100	2	10	25	100
<b>Right bank (black locations of Figure 6.9)</b>												
SP109D	147.28	148.15	148.30	148.61	-0.85	-0.03	-0.02	0.05	-0.42	0.29	0.36	0.42
SP131D	146.70	147.59	147.75	148.08	-0.57	-0.02	0.00	0.07	-0.12	0.38	0.47	0.55
SP143D	146.35	147.21	147.39	147.77	-1.07	0.00	0.02	0.10	-0.54	0.49	0.59	0.67
SP188nD	140.01	140.02	140.18	141.25	0.00	0.01	0.25	0.97	0.01	0.95	2.42	4.35
SP41D	141.66	148.67	149.85	151.56	-0.85	-0.91	-0.73	-0.77	0.25	0.28	0.24	0.12
SP434D	143.48	146.09	146.26	146.59	2.35	0.10	0.10	0.16	2.73	0.74	0.86	1.04
SP50D	139.34	145.02	146.51	149.57	-0.81	-1.17	-1.07	-0.59	0.42	0.77	0.82	0.60
SP67D	138.86	143.69	144.82	147.35	-0.94	-0.84	-0.69	-0.32	0.38	0.77	0.93	0.95
SP7D	147.36	151.82	152.57	153.67	-0.37	-0.56	-0.45	-0.46	0.01	0.01	0.03	0.02
SP83D	148.05	149.02	149.17	149.50	-0.81	-0.06	-0.04	0.01	-0.46	0.20	0.25	0.27
SP98D	147.53	148.40	148.55	148.87	-0.14	-0.03	-0.02	0.03	0.17	0.26	0.32	0.36
SP29D	116.20	125.60	128.21	134.56	-1.03	-1.66	-1.52	-0.79	0.24	0.48	0.70	0.85
<b>Left bank (red locations of Figure 6.9)</b>												
SP97D	147.71	148.49	148.64	148.95	-1.20	-0.04	-0.03	0.03	-0.75	0.25	0.30	0.35
SP115D	146.70	148.05	148.20	148.53	-0.93	-0.06	-0.02	0.05	-0.45	0.31	0.38	0.44
SP132D	146.75	147.57	147.72	148.06	-1.16	-0.02	0.01	0.07	-0.70	0.38	0.48	0.56
SP146D	146.45	147.23	147.39	147.76	-1.13	-0.01	0.03	0.10	-0.62	0.46	0.58	0.66
SP162D	138.48	138.49	138.74	139.73	0.00	0.04	0.19	0.44	0.01	0.84	1.68	2.96
SP191D	145.26	145.96	146.13	146.50	-1.38	0.29	0.32	0.38	-0.70	0.89	1.03	1.16
SP30D	151.01	152.26	152.46	152.85	-0.13	-0.10	-0.07	-0.03	0.03	0.05	0.07	0.08
SP40D	143.56	148.96	150.02	151.51	-0.60	-0.79	-0.74	-0.63	0.21	0.27	0.23	0.17
SP416nD	141.65	145.04	145.88	147.13	0.99	0.32	0.17	0.01	2.02	1.75	1.47	0.93
SP424D	139.91	139.92	140.06	140.79	0.00	0.02	0.15	0.50	0.01	0.60	1.55	3.52
SP425D	145.63	146.98	147.23	147.70	-0.29	-0.03	0.00	0.08	0.48	0.64	0.66	0.67
SP51D	145.07	149.70	150.47	151.00	-0.70	-0.27	-0.13	-0.08	0.31	0.24	0.14	0.14
SP68D	143.73	148.56	149.39	150.23	-0.52	-0.30	-0.28	-0.25	0.40	0.35	0.37	0.20
SP84D	148.04	149.01	149.16	149.48	-0.57	-0.06	-0.04	0.01	-0.26	0.19	0.24	0.27
SP8D	147.50	151.95	152.66	153.46	-0.38	-0.29	-0.28	-0.24	0.03	0.04	0.03	0.06

## 6.4 Flood hazard determination

In order to be able to estimate damages from Table 6.1, water depths have been derived from the water levels. This means ground levels of the floodplains are required. These ground levels need to be very precise, since a few extra decimetres water depth can cause severe damage to the crops. Use is made of the DEM available for the Se Bangfai area.

Flood extent and depth as derived from the difference of the computed water levels and the ground elevation from the DEM are shown in Figure 6.10 to Figure 6.13 for the Base Case for return periods  $T = 2, 10, 25$  and 100 year. Such information is basic input for damage calculations. Further refinements can be made relative to the cropping calendar, as the full hydrographs for each location for each simulated year is available from the database. Similar pictures can be made for the cases with embankments along one or both sides. The effectiveness of the measures can directly be assessed from maps showing the differences

between the maximum levels, water depths etc. or damages between the different cases. Reference is made to Annex 3 for application of the results for flood damage assessment.

Comparison of the flood maps with the observed flooding in the year 2000 (see Figure 6.14) learns that qualitatively the flooding extent in the downstream part is well reproduced by the model.

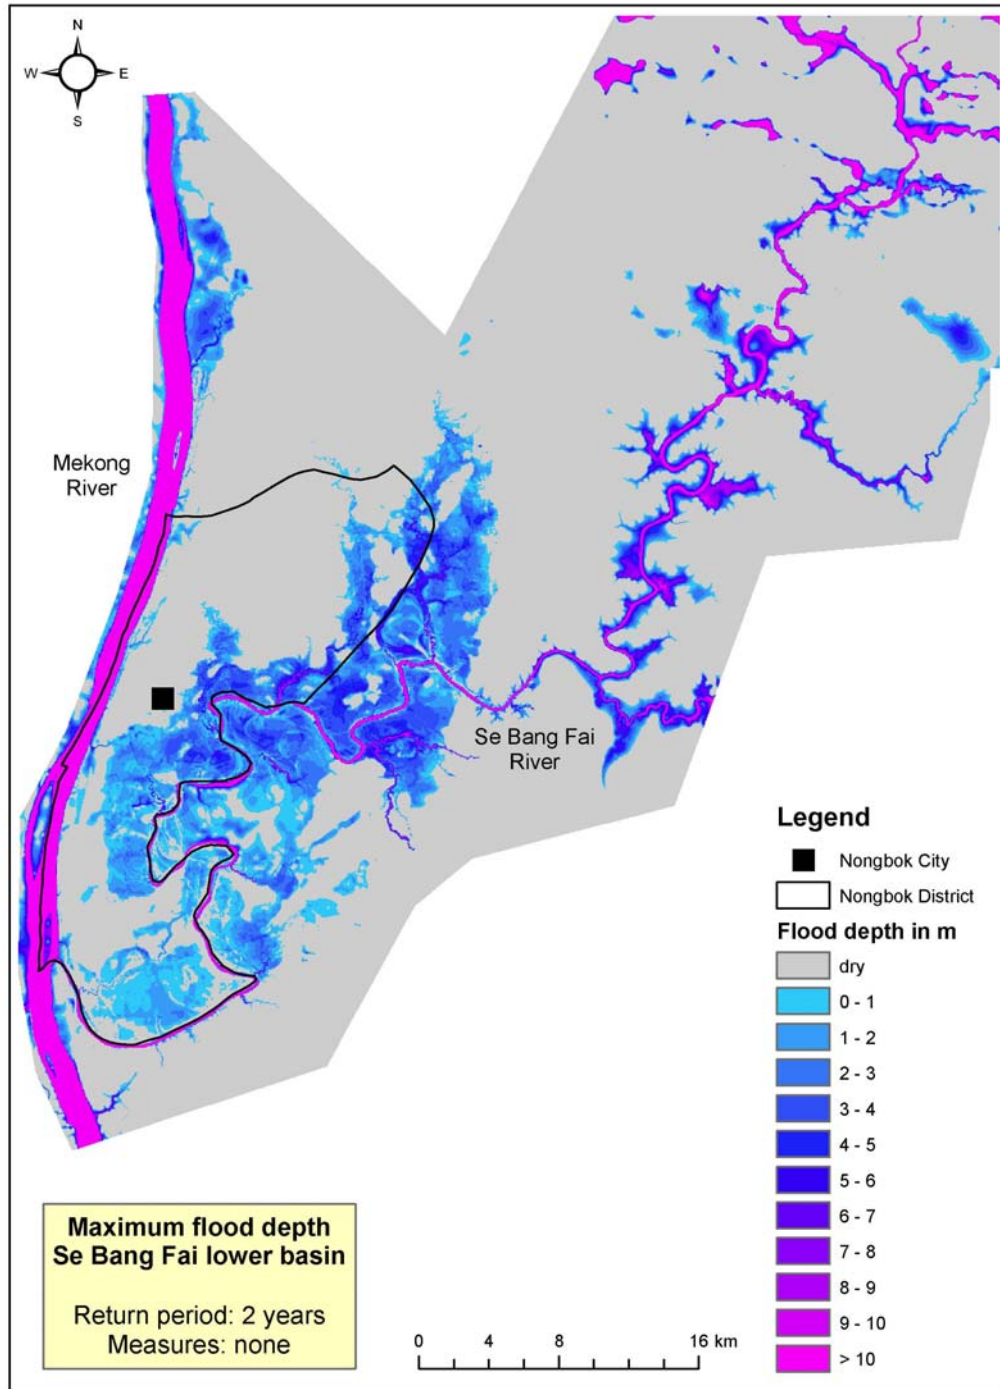


Figure 6.10 Flood depth and extent map Lower Se Bangfai, T= 2 years

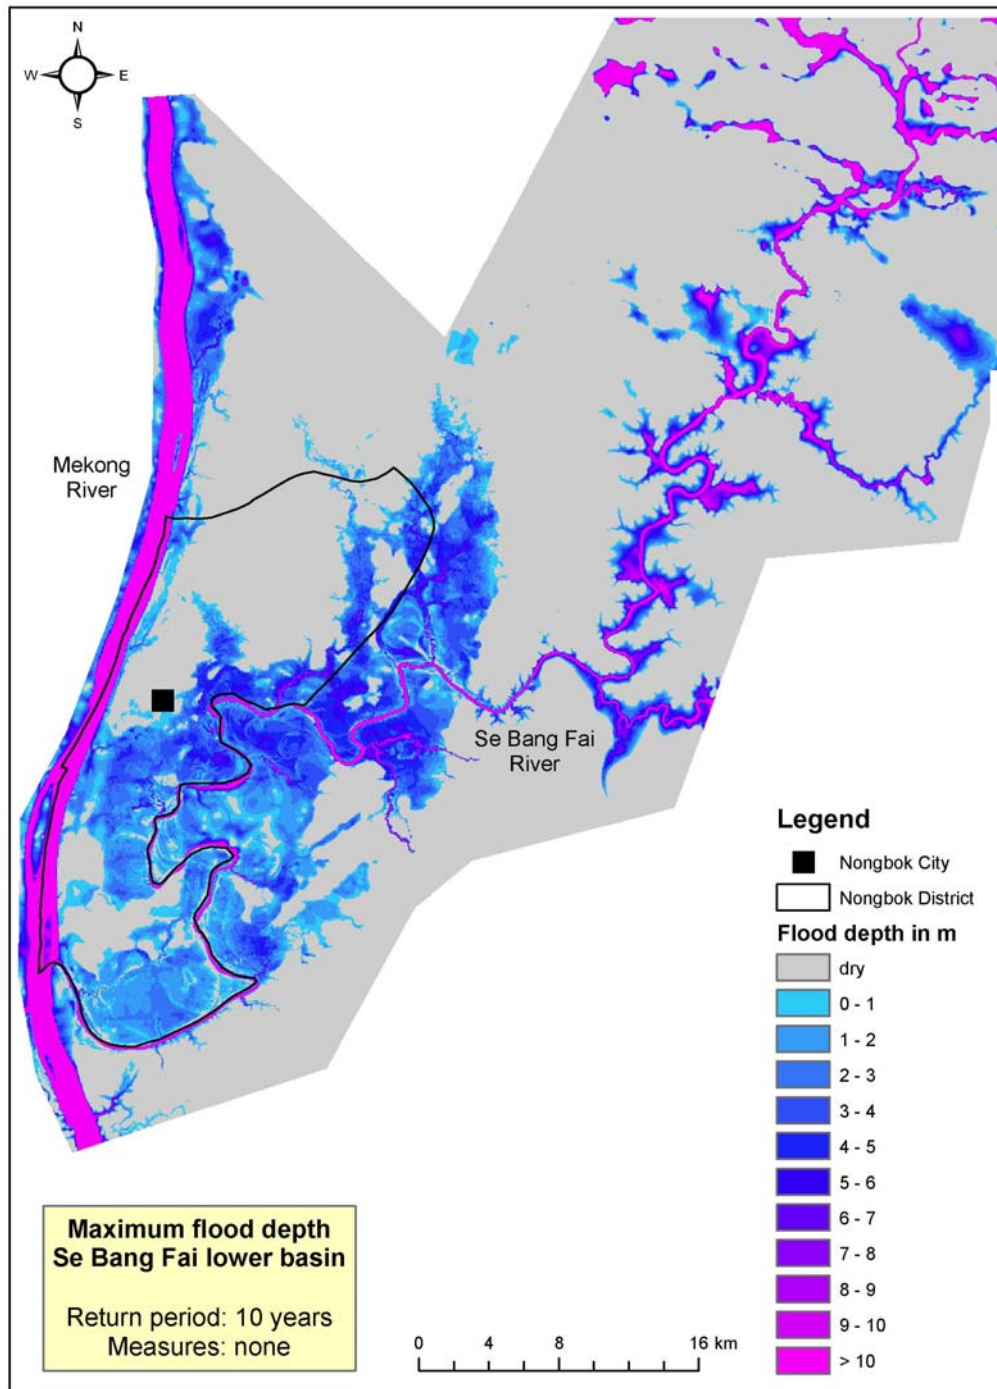


Figure 6.11 Flood depth and extent map Lower Se Bangfai, T= 10 years



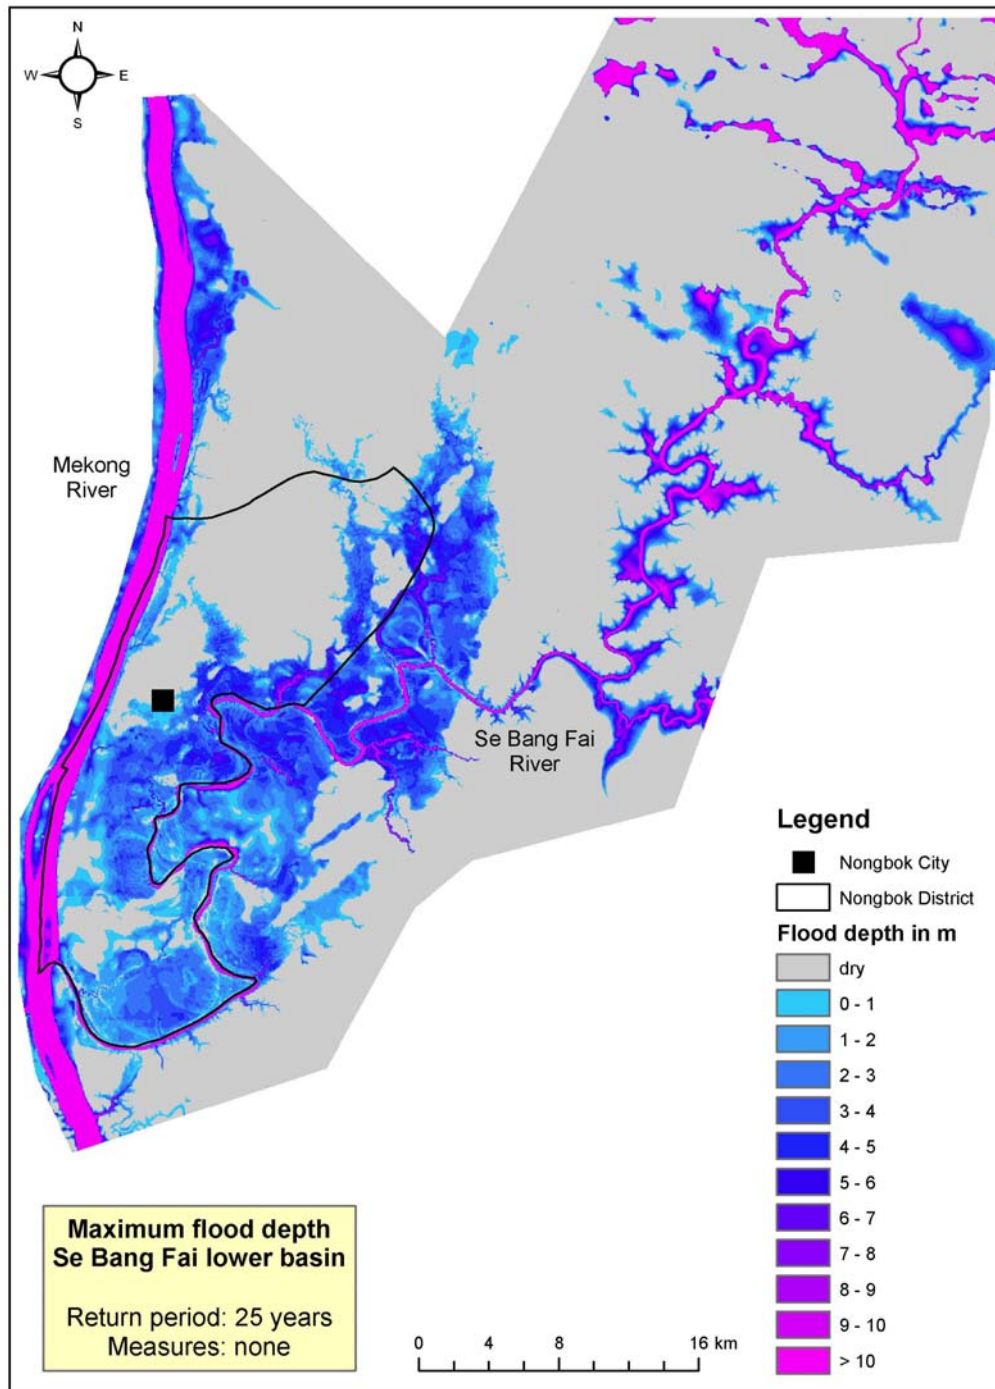


Figure 6.12 Flood depth and extent map Lower Se Bangfai, T= 25 years

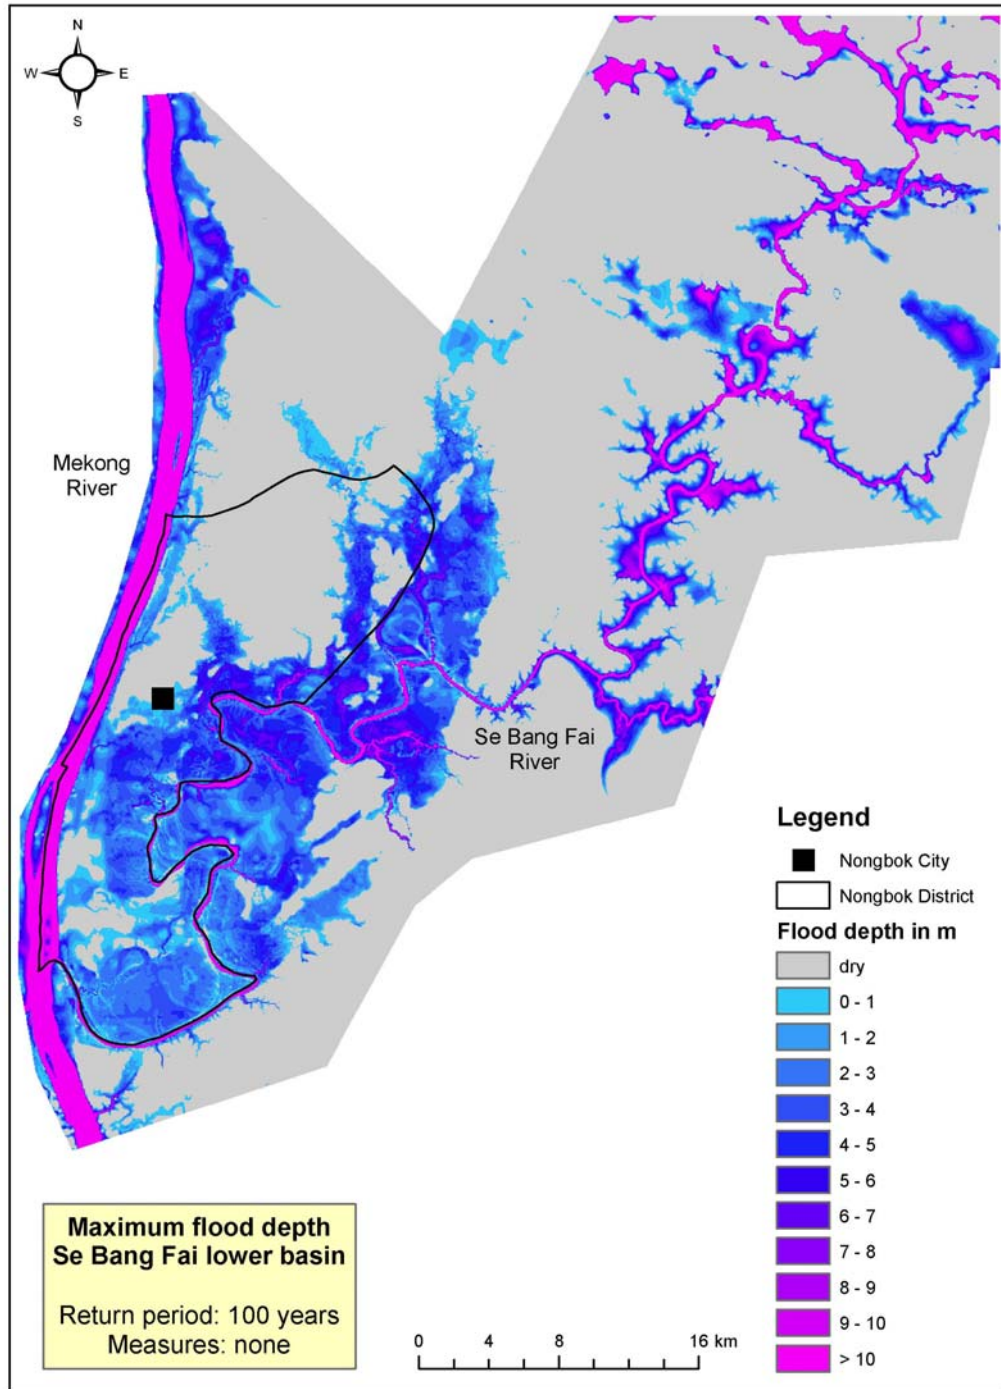


Figure 6.13 Flood depth and extent map Lower Se Bangfai, T= 100 years

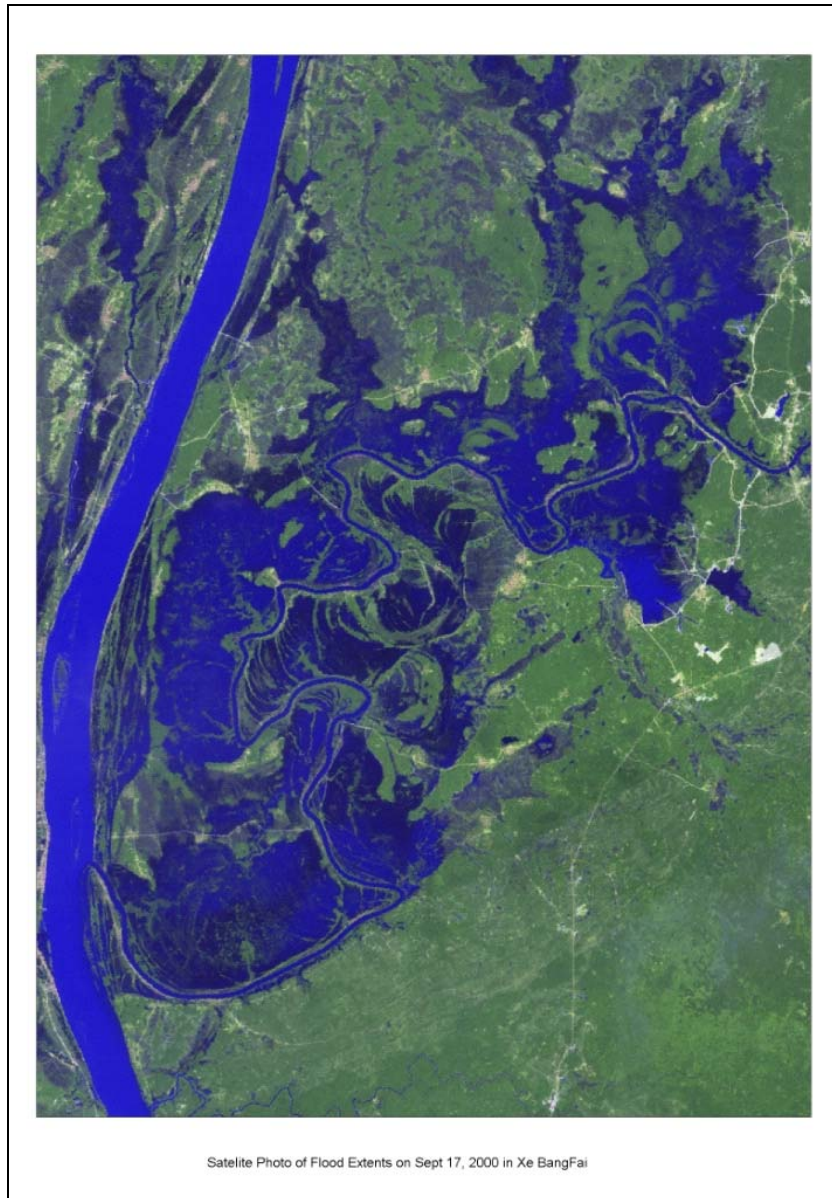


Figure 6.14 Extent of flooding along lower Se Bangfai and Mekong in year 2000

## 6.5 Bypass canal

### 6.5.1 Introduction

As Option 2 for flood risk reduction a bypass canal from the Se Bangfai (see Figure 3.10) has been presented. First, its effect have been assessed for the flood seasons of the years 1995 to 2000 (section 6.5.2). Subsequently a probabilistic analysis was executed (section 6.5.3) for the diversion canal, similar to the analysis in the previous sections.

A 200 m wide bypass, with bed-elevation at 138 masl and side slopes of 1:2 has been assumed, with a hydraulic roughness of  $n = 0.025$ . For this the hydraulic model was extended with the Mekong reach Thakek-That Phanom, see also Chapter 4.

## 6.5.2 Simulations for the years 1995 until 2000

The results of the simulations are presented in the following Figure 6.15 to Figure 6.27. From these figures it is observed that the canal diverts at maximum discharges up to 500 to 1,000 m<sup>3</sup>/s, dependent on the absolute level in the Se Bangfai and the level difference between the level at the off-take and the intake into the Mekong. The effect on the maximum water level in the river at the off-take varies generally from 0.5 to 1.0 m gradually reducing away from the off-take. It implies that a bypass canal will not eliminate the need for improvement of the embankment but rather reduce the required crest level.

The effect of the bypass on the maximum level in the flood plain is of the same order of magnitude as along the river, but as shown in Figure 6.27, its effect on the reduction of the flood duration is also to be taken into account and may be considerable.

For the dry year 1998 the bypass did not function as the level at the off-take hardly exceeded 138 masl.

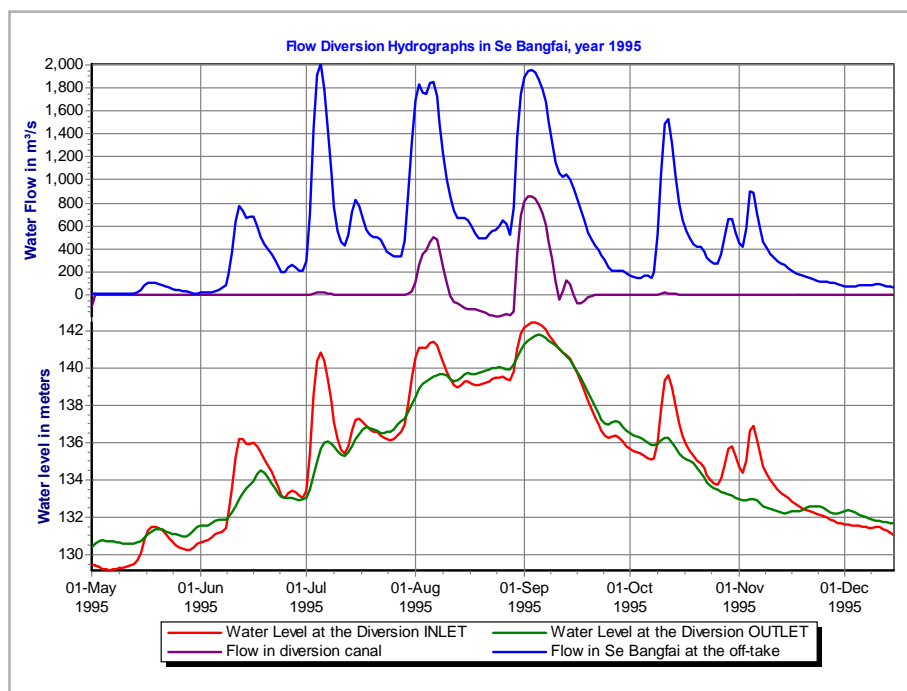


Figure 6.15 Water levels in Se Bangfai and Mekong and discharge in canal and river (20 km d/s offtake), Year 1995

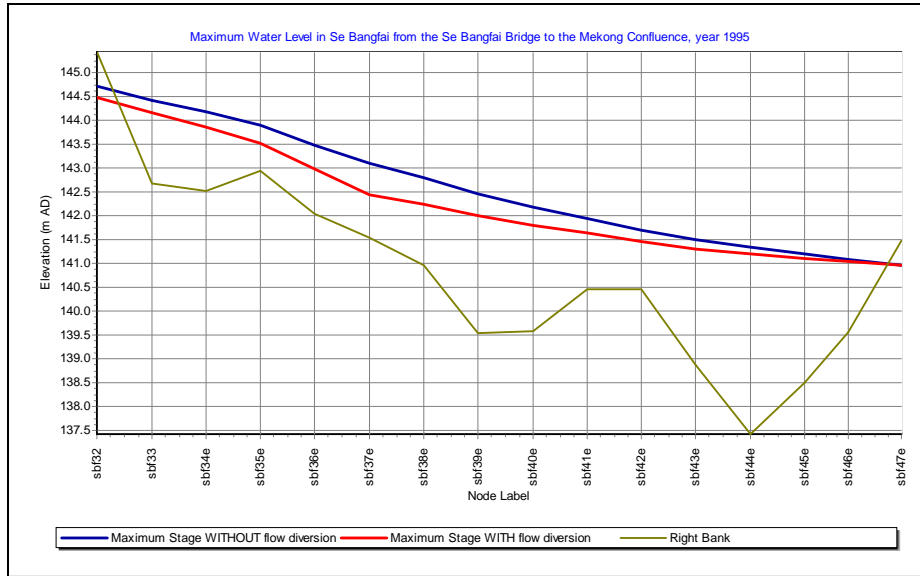


Figure 6.16 Maximum water level along Lower Se Banfai from Highway Bridge to mouth with and without bypass canal, Year 1995

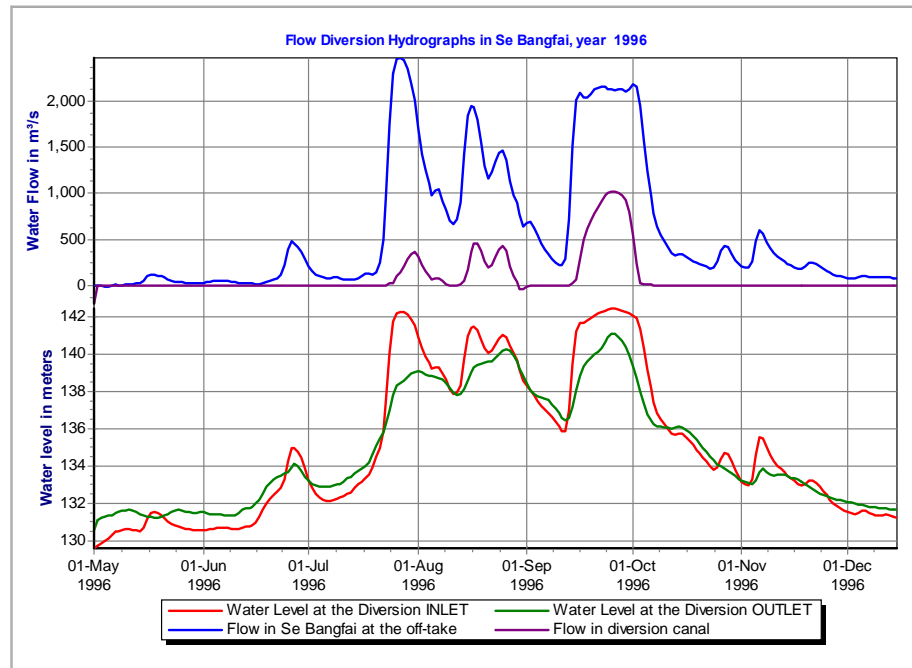


Figure 6.17 Water levels in Se Bangfai and Mekong and discharge in canal and river (20 km d/s offtake), Year 1996



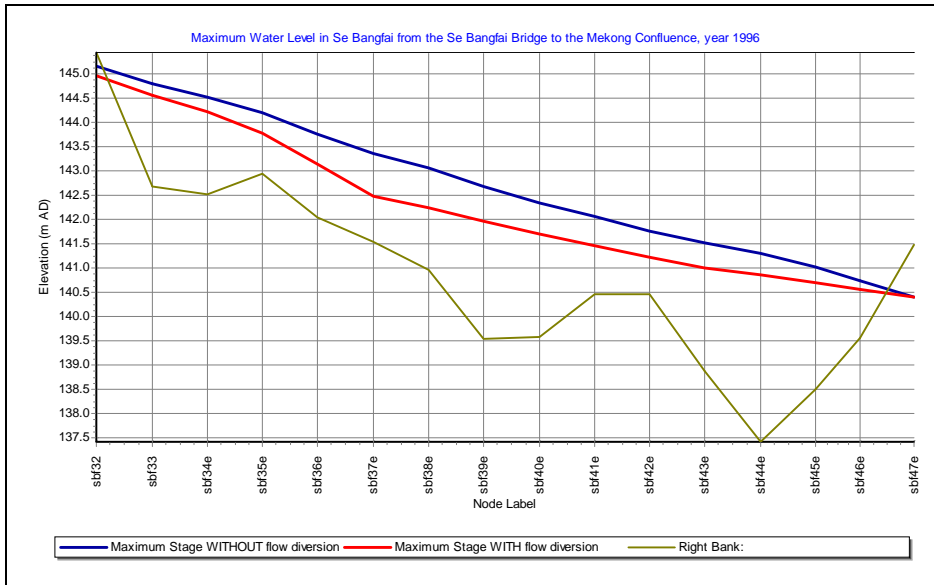


Figure 6.18 Maximum water level along Lower Se Banfai from Highway Bridge to mouth with and without bypass canal, Year 1996

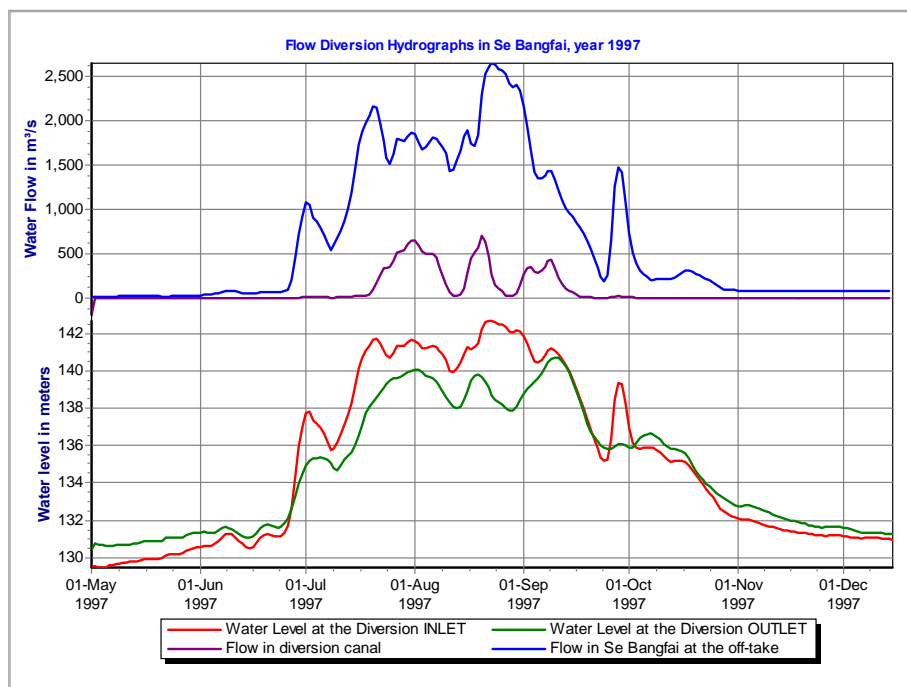


Figure 6.19 Water levels in Se Bangfai and Mekong and discharge in canal and river (20 km d/s offtake), Year 1997

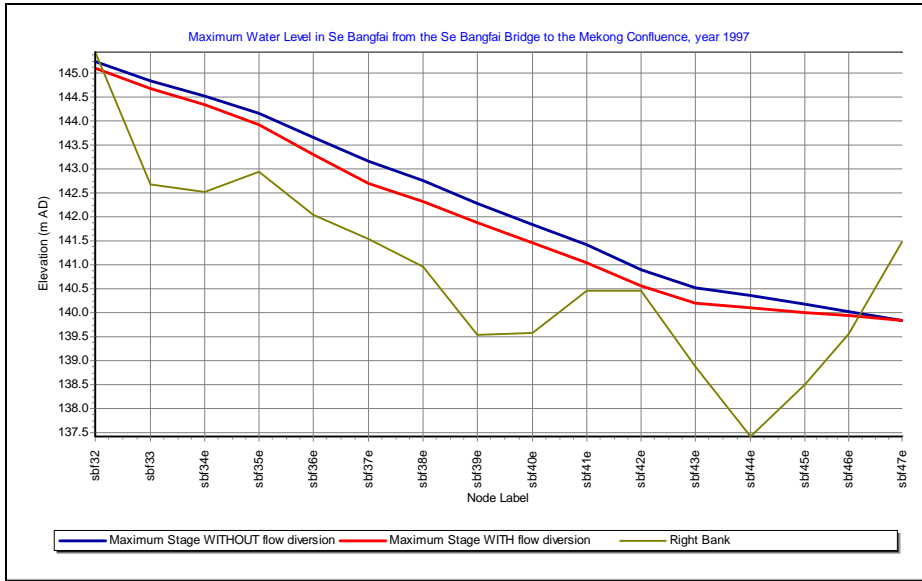


Figure 6.20 Maximum water level along Lower Se Bangfai from Highway Bridge to mouth with and without bypass canal, Year 1997

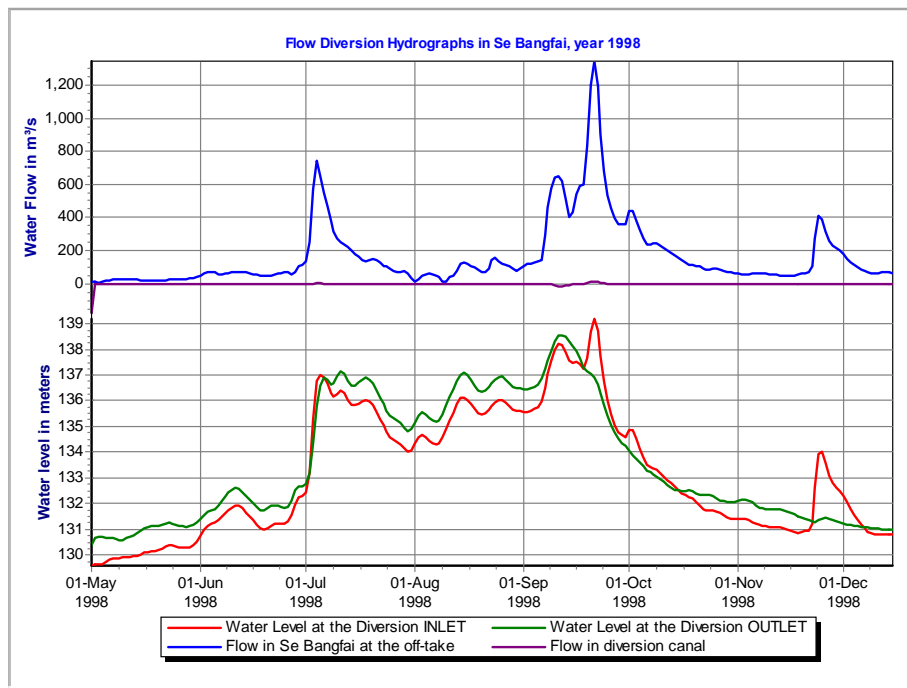


Figure 6.21 Water levels in Se Bangfai and Mekong and discharge in canal and river (20 km d/s offtake), Year 1998

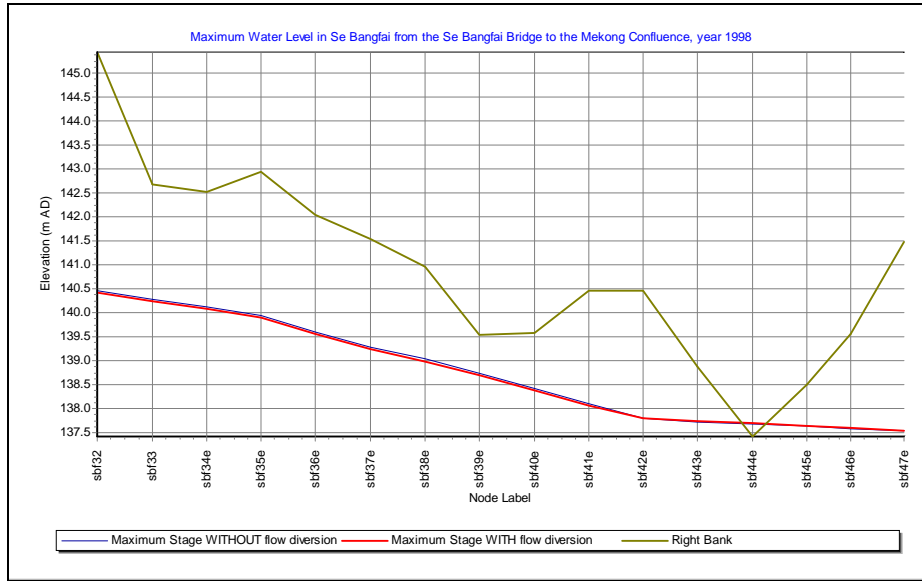


Figure 6.22 Maximum water level along Lower Se Bangfai from Highway Bridge to mouth with and without bypass canal, Year 1998

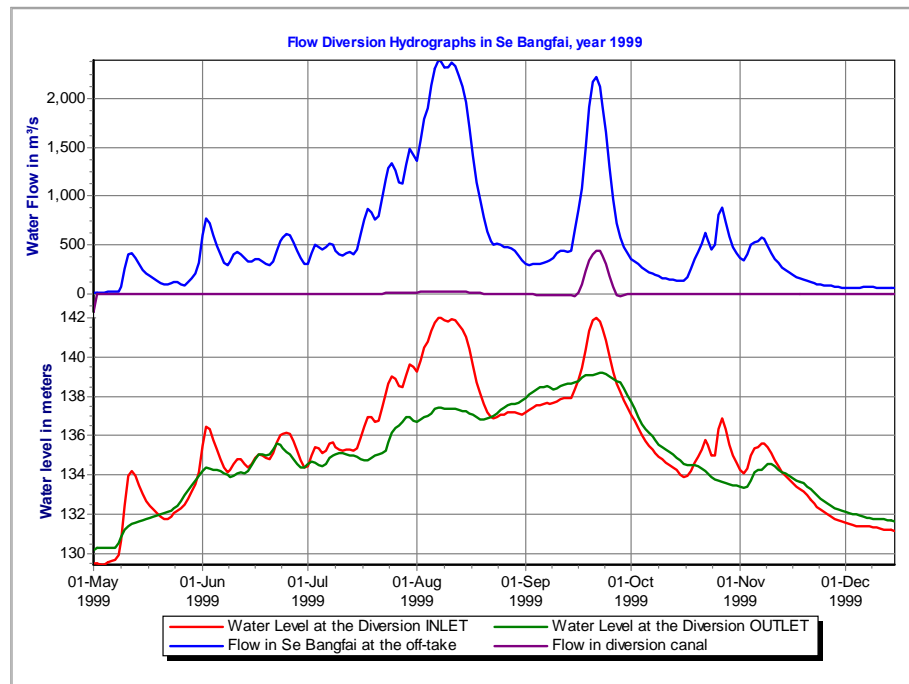


Figure 6.23 Water levels in Se Bangfai and Mekong and discharge in canal and river (20 km d/s offtake), Year 1999



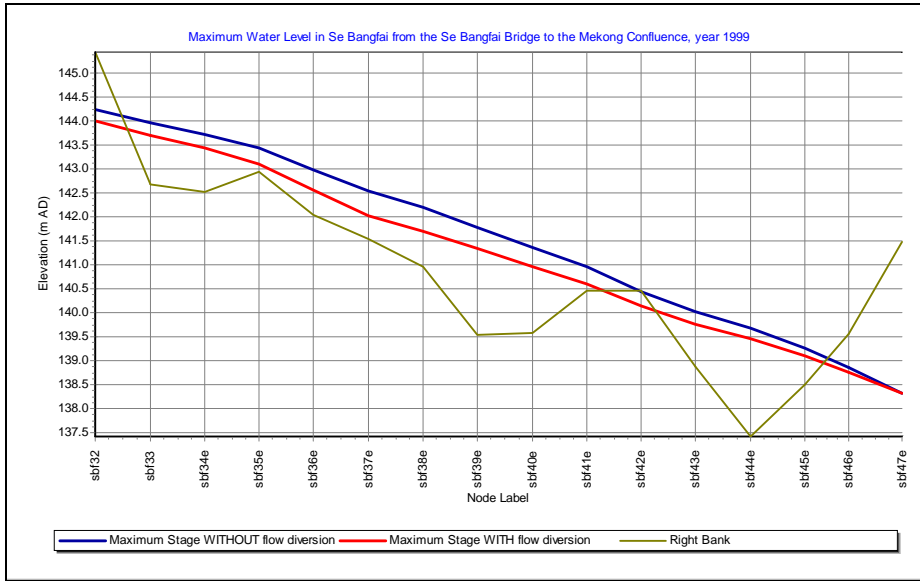


Figure 6.24 Maximum water level along Lower Se Bangfai from Highway Bridge to mouth with and without bypass canal, Year 1999

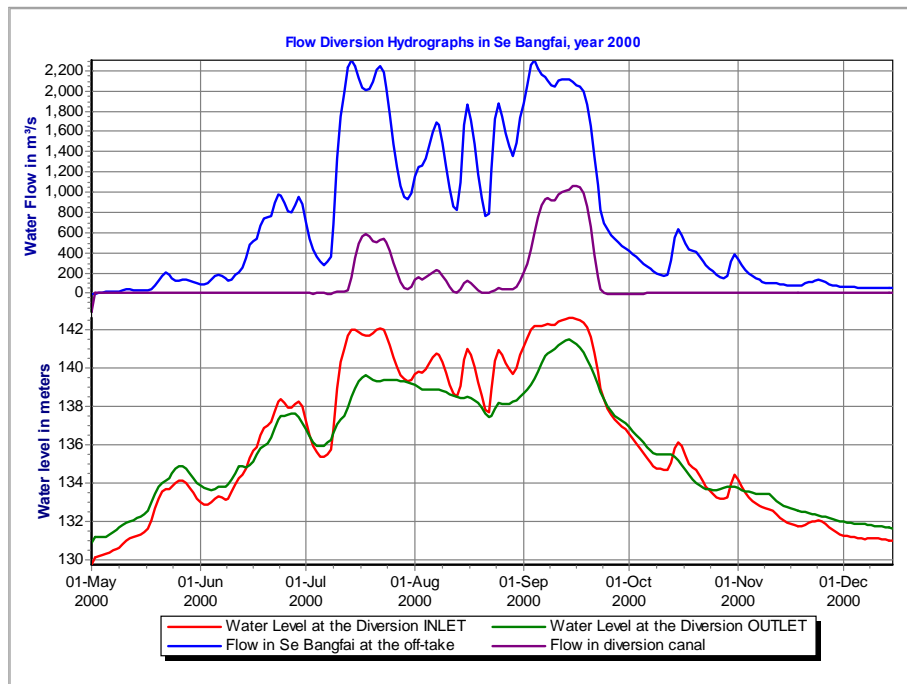


Figure 6.25 Water levels in Se Bangfai and Mekong and discharge in canal and river (20 km d/s offtake) , Year 2000

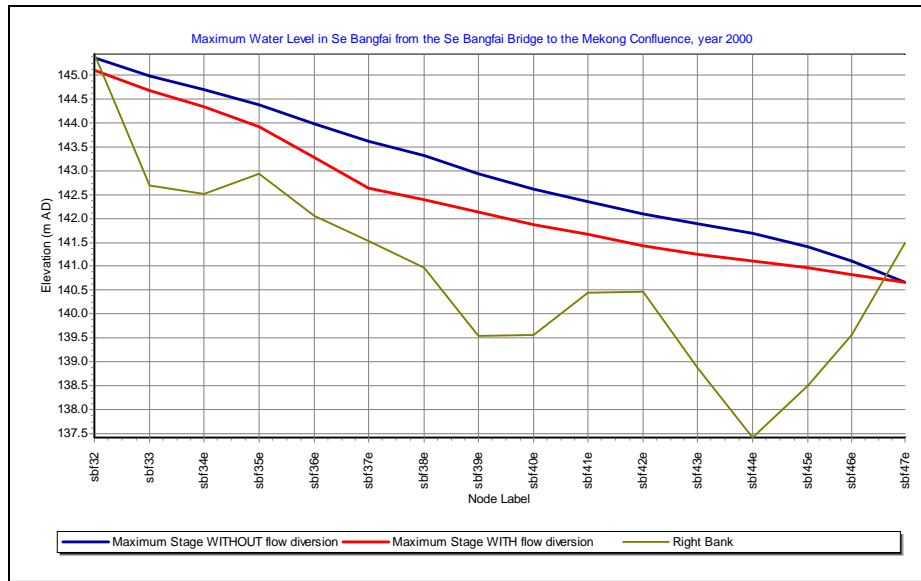


Figure 6.26 Maximum water level along Lower Se Banfai from Highway Bridge to mouth with and without bypass canal, Year 2000

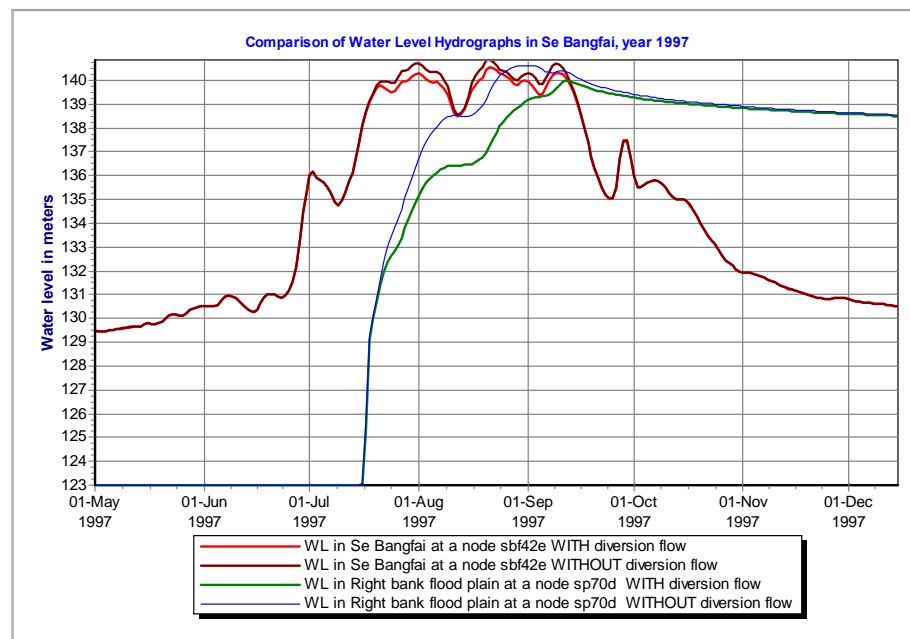


Figure 6.27 Water level in right bank flood plain of Se Bangfai with and without bypass canal, Year 1996

### 6.5.3 Probabilistic analysis for the diversion channel

Based on the method described in section 6.3.2, the 2, 10, 25 and 100-year water levels have been derived for all locations along the lower reach of the Se Bangfai River, assuming the existence of the diversion canal. shows the results for Case 1 (no embankments). Figure 6.28 compares the resulting 100-year water level with the reference situation in which no diversion canal is present (N.B. this is the same reference situation as before, i.e. the case previously described as “no embankments”). Figure 6.29 shows the difference between the two cases. The diversion canal has a maximum reducing effect of almost 2 m on the 100-year water level in the river, approximately 50 km from the river mouth. Similar to section

6.3.2 the reduction reduces to approximately 0 at the upstream and downstream boundaries. For the 100-year water level a maximum reduction (near the off-take) of 1.83 m is observed

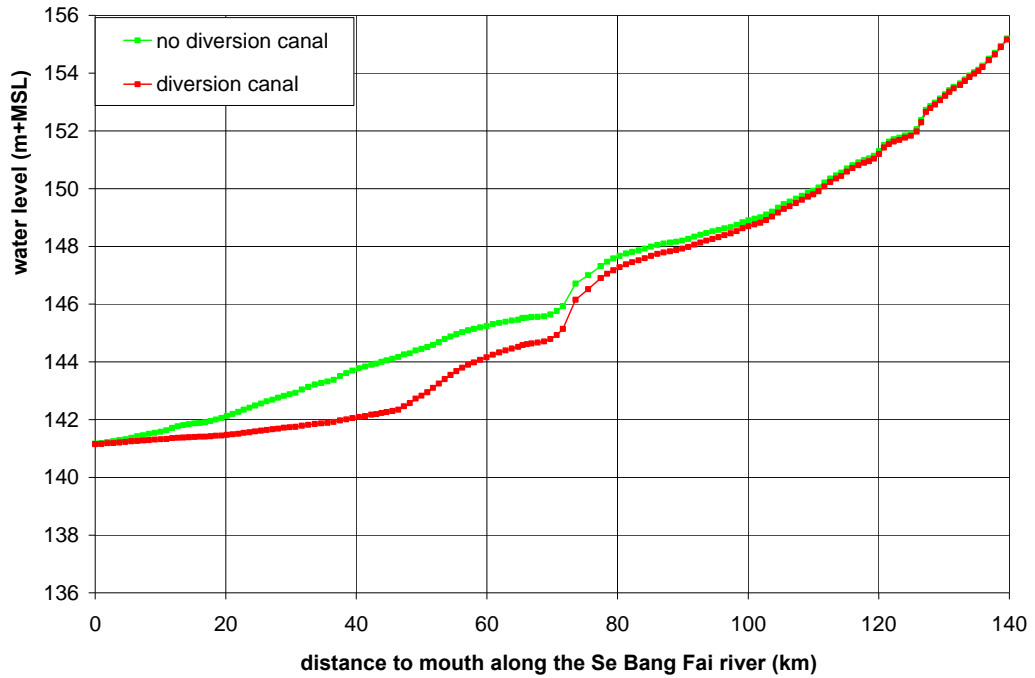


Figure 6.28 Computed **100-year** flood level along the Se Bangfai river for the cases with [a] no diversion canal and [b] diversion canal.

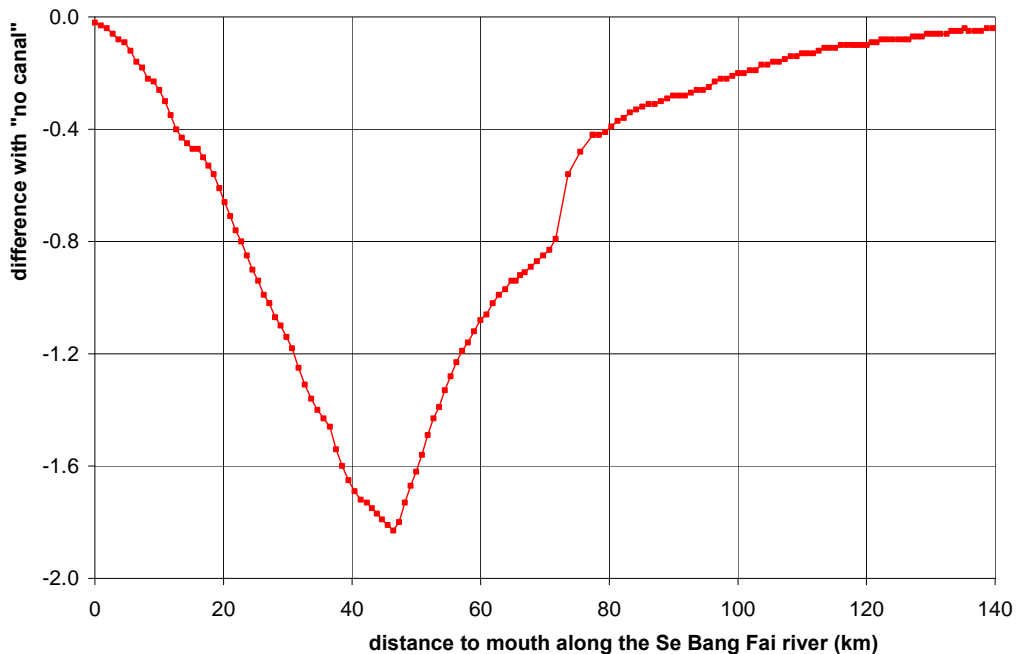


Figure 6.29 Differences in the computed **100-year** flood level along the Se Bangfai river for the case of "diversion canal" relative to the Base Case in which no diversion canal is present.

Table 6.3 and Table 6.4 show the effect of the diversion canals on water levels in the floodplain areas. It can be seen that, in contrast with the embankments, the bypass canal has a reducing effect on water levels for all floodplain locations.

Table 6.3 Water levels and changes in water levels with return periods of 2, 10, 25 and 100 years in the floodplains of the Se Bangfai river basin; locations **downstream** of diversion canal.

node	water levels with no diversion canal				change in water level as a result of the bypass canal			
	2	10	25	100	2	10	25	100
<b>right Bank (green locations of Figure 6.9)</b>								
SP246nD	143.99	144.89	145.10	145.51	-1.14	-1.41	-1.15	-1.01
SP202D	144.15	144.92	145.12	145.52	-0.75	-0.84	-0.85	-0.92
SP226D	144.01	144.76	144.97	145.37	-0.79	-0.88	-0.90	-0.98
SP227D	143.49	144.36	144.59	145.01	-0.97	-1.14	-1.14	-1.23
SP245D	142.99	143.72	143.99	144.43	-1.48	-1.62	-1.61	-1.70
SP245nD	141.34	141.73	142.30	143.32	-0.08	-0.46	-1.03	-1.82
SP248D	144.10	144.92	145.12	145.52	-0.69	-0.84	-0.85	-0.92
SP261D	142.85	143.56	143.83	144.26	-1.36	-1.55	-1.56	-1.67
SP266D	142.10	142.76	143.11	143.60	-1.44	-1.47	-1.47	-1.62
SP284U	142.28	142.96	143.28	143.75	-1.51	-1.58	-1.55	-1.69
SP295D	141.76	142.39	142.74	143.20	-1.31	-1.30	-1.25	-1.36
SP307D	141.16	141.61	141.89	142.29	-0.92	-0.81	-0.73	-0.78
SP312U	140.98	141.63	142.00	142.48	-0.87	-0.88	-0.78	-0.90
SP343D	139.75	140.92	141.37	141.80	-0.58	-0.54	-0.40	-0.42
SP361D	139.35	140.68	141.13	141.50	-0.24	-0.39	-0.25	-0.21
SP376D	139.17	140.48	140.93	141.30	-0.04	-0.31	-0.13	-0.08
<b>left Bank (light blue locations of Figure 6.9)</b>								
SP201D	144.15	144.92	145.12	145.52	-0.75	-0.85	-0.86	-0.93
SP219D	143.14	144.57	144.83	145.28	-1.82	-2.10	-1.65	-1.20
SP238D	141.22	143.58	144.00	144.66	-2.26	-4.09	-3.97	-3.44
SP258D	142.75	143.49	143.76	144.20	-1.80	-1.82	-1.75	-1.83
SP277D	136.06	137.66	139.27	141.61	-0.65	-2.25	-3.85	-6.19
SP285D	135.42	136.45	137.94	140.22	-0.01	-1.04	-2.53	-4.81
SP286D	139.87	140.93	141.56	142.14	-0.20	-0.93	-0.94	-0.86
SP300D	137.67	138.02	138.84	140.56	0.00	-0.35	-1.17	-2.89
SP344D	139.56	140.80	141.38	141.84	-0.06	-0.66	-0.49	-0.46
SP362D	138.91	140.34	141.07	141.49	-0.02	-0.44	-0.21	-0.20
SP375D	133.80	135.50	137.85	139.90	0.00	-0.43	-0.58	-0.15

Table 6.4 Water levels and changes in water levels with return periods of 2, 10, 25 and 100 years in the floodplains of the Se Bangfai river basin; locations **upstream** of diversion canal.

node	water levels with no diversion canal				change in water level as a result of the bypass canal			
	2	10	25	100	2	10	25	100
<b>Right bank (black locations of Figure 6.9)</b>								
SP109D	147.28	148.15	148.30	148.61	-0.18	-0.19	-0.20	-0.22
SP131D	146.70	147.59	147.75	148.08	-0.27	-0.26	-0.27	-0.30
SP143D	146.35	147.21	147.39	147.77	-0.27	-0.34	-0.35	-0.38
SP188nD	140.01	140.02	140.18	141.25	0.00	0.00	-0.16	-1.04
SP41D	141.66	148.67	149.85	151.56	-0.51	-0.55	-0.40	-0.33
SP434D	143.48	146.09	146.26	146.59	-1.50	-0.77	-0.54	-0.52
SP50D	139.34	145.02	146.51	149.57	-0.58	-0.97	-0.92	-0.68
SP67D	138.86	143.69	144.82	147.35	-0.67	-0.86	-0.88	-0.88
SP7D	147.36	151.82	152.57	153.67	-0.14	-0.22	-0.17	-0.13
SP83D	148.05	149.02	149.17	149.50	-0.17	-0.14	-0.14	-0.16
SP98D	147.53	148.40	148.55	148.87	-0.21	-0.18	-0.18	-0.21
SP29D	116.20	125.60	128.21	134.56	-0.58	-0.90	-0.91	-0.95
<b>Left bank (red locations of Figure 6.9)</b>								
SP97D	147.71	148.49	148.64	148.95	-0.15	-0.17	-0.17	-0.19
SP115D	146.70	148.05	148.20	148.53	-0.17	-0.22	-0.21	-0.24
SP132D	146.75	147.57	147.72	148.06	-0.22	-0.27	-0.27	-0.31
SP146D	146.45	147.23	147.39	147.76	-0.25	-0.32	-0.32	-0.36
SP162D	138.48	138.49	138.74	139.73	0.00	0.00	-0.24	-0.87
SP191D	145.26	145.96	146.13	146.50	-0.32	-0.48	-0.49	-0.55
SP30D	151.01	152.26	152.46	152.85	-0.06	-0.06	-0.06	-0.07
SP40D	143.56	148.96	150.02	151.51	-0.38	-0.48	-0.40	-0.28
SP416nD	141.65	145.04	145.88	147.13	-1.07	-2.39	-2.06	-1.40
SP424D	139.91	139.92	140.06	140.79	0.00	0.00	-0.14	-0.67
SP425D	145.63	146.98	147.23	147.70	-0.62	-0.57	-0.56	-0.52
SP51D	145.07	149.70	150.47	151.00	-0.52	-0.30	-0.18	-0.10
SP68D	143.73	148.56	149.39	150.23	-0.49	-0.60	-0.57	-0.20
SP84D	148.04	149.01	149.16	149.48	-0.18	-0.15	-0.14	-0.16
SP8D	147.50	151.95	152.66	153.46	-0.17	-0.18	-0.17	-0.10

## 6.6 Effects of varying bottom levels in the Mekong river

In section 4.3.5 it was noted that the Mekong river in this area is morphologically very active with varying bottom levels as a consequence. At location Mukhdahan the levels for high discharges, based on the year 2000 curve, may be up to 0.75 m off, up and down. A quickscan was executed to assess the effect varying bottom levels (and, consequently, water levels) in the Mekong on water levels in the Se Bangfai. For this purpose, the 90 model were redone twice for the following adapted conditions:

- Situation of lower bottom level: -0.75 m
  - stage discharge relation at Mukhdahan such that it leads to water levels -0.75 m in comparison with the base case of the previous sections
  - Manning coefficient of 0.028 m. (instead of 0.032 in the base case)

- Situation of higher bottom level: +0.75 m
  - stage discharge relation at Mukhdahan such that it leads to water levels +0.75 m in comparison with the base case of the previous sections
  - Maning coefficient of 0.036 m. (instead of 0.032 in the base case)

In the probabilistic analysis, the bottom level is now introduced as an additional random variable. The above two situations (plus and minus 0.75 m) are considered to be the extremes of a uniform distribution function. In other words, if  $h^*$  is the water level at Mukhdahan that follows from discharge  $Q^*$ , using the stage discharge relation based on the year 2000 curve, then the “real” water level at Mukhdahan is uniformly distributed between  $h^*-0.75$  and  $h^*+0.75$  m. This means on average the water level is still  $h^*$ . Nevertheless, applying this distribution increases the probabilities of extreme water levels as a result of the contribution of increased bottom levels.

For instance, with the introduction of the new random variable “bottom level”, the 100-year water level at Mukhdahan increases from 137.81 to 138.07, an increase of 0.26 m. Figure 6.30 shows the effect on 100-year water levels along the lower Se Bangfai. At the river mouth the effect is about 10 cm, and it diminishes 30 km upstream.

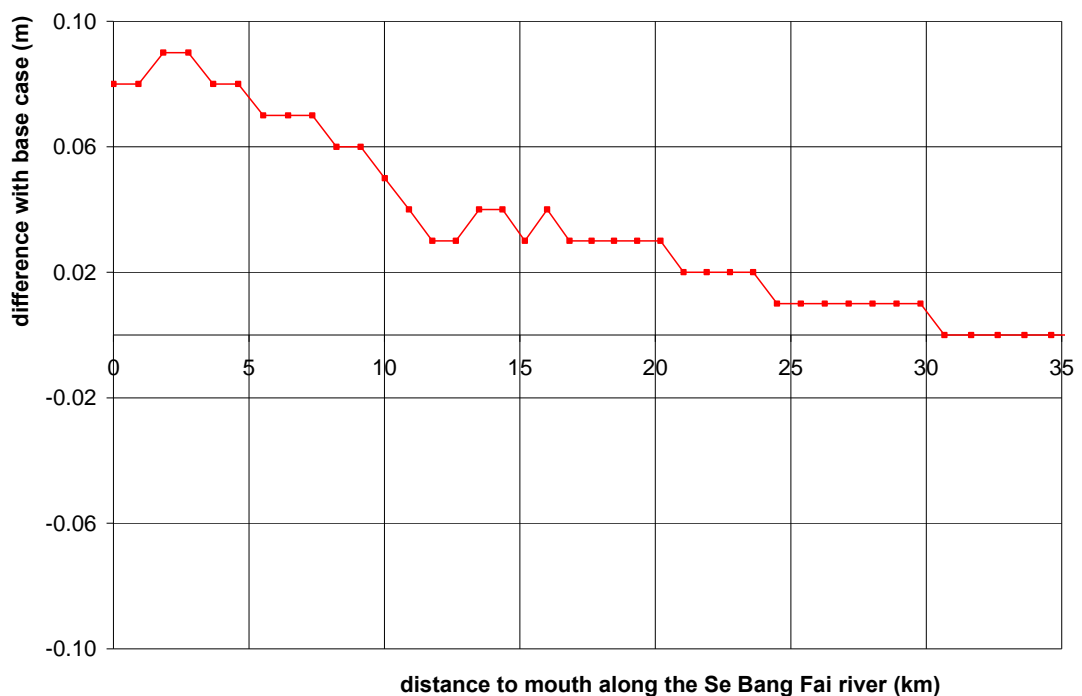


Figure 6.30 Increase of water levels along the Se Bangfai river as a result of the introduction of the varying bottom level as a new random variable.

The reason why the effect at Se Bangfai river mouth is far less than at Mukhdahan is due to the fact that for high discharges the effect of increased (or decreased) water levels at Mukhdahan are almost halved at That Phanom. This is shown in Figure 6.31 and Figure 6.32: for low water levels the differences with the bases case at That Phanom are 0.75 m (similar to Mukhdahan) whereas for high water levels these differences decrease to about 0.40 m. The analysis above provide a good insight in effects of varying bottom depth on the 100-year water level. However, with the assessment of effects of measures like embankments or diversion canals we are mainly interested in relative differences. Therefore, the analyses of the previous sections (without the varying bottom levels as random variable) are sufficient.

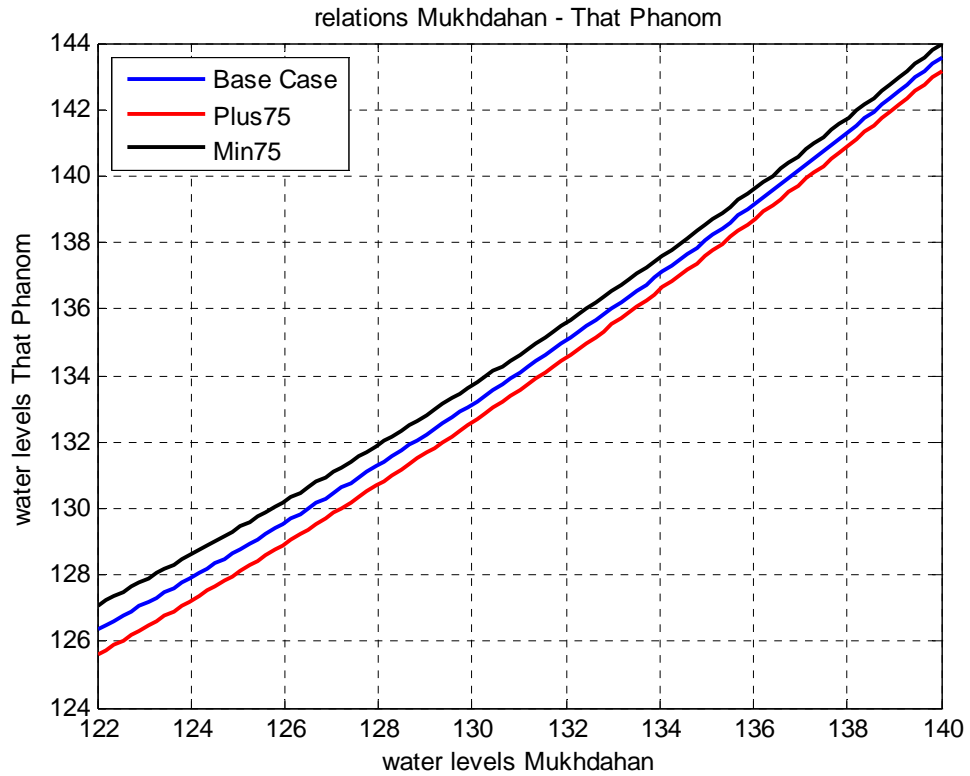


Figure 6.31 Relation between water levels at Mukhdahan and That Phanom for the base case and two additional cases (water level +/- 0.75 m).

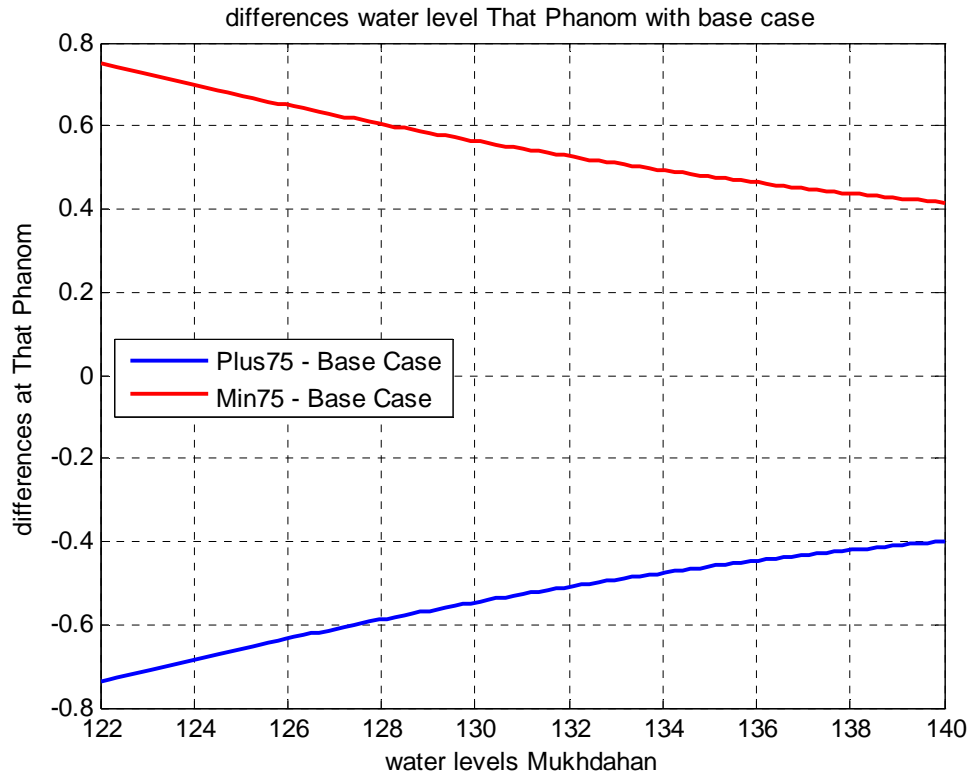


Figure 6.32 Differences in water level at That Phanom between the cases of Figure 6.31.

## 7 Conclusions and recommendations

### 7.1 Conclusions

Based on the analyses presented in the previous chapters the following conclusions can be drawn.

#### **Type of floods and flooded area**

1. Flood prone areas in the Se Bangfai basin are:
  - between the Mekong and Highway 13S, north of Se Bangfai river, creating extensive and of long lasting flooding, and
  - near Road 1F between Mahaxai and Nam Oula with flooding of one week duration per year on average.
2. The flood levels in the lower Se Bangfai are not only due to high river discharges but are also affected by high water levels in the Mekong at the river mouth at That Phanom. The floods in this region are therefore classified as combined floods. Bivariate distributions of Se Bangfai river flows and Mekong water levels are required to describe the phenomenon in statistical terms.

#### **Data availability and validation**

3. Water level series, discharge measurements and discharge series are available for Mahaxai as from 1988 onward. The rating curve is regularly updated. The discharge series are suitable for extreme value analysis
4. Water level series, discharge measurements and discharge series are also available for Se Bangfai Highway Bridge, with a discharge record even from 1960 onward with some gaps. The latter record is not corrected for backwater and therefore not suitable.
5. Discharge measurements at Highway Bridge and flows at Mahaxai do correlate well. A consistent discharge series has been established for Highway Bridge based on regression with Mahaxai. The difference between these series provides an estimate of the lateral inflow between Mahaxai and the flood prone area downstream of Highway Bridge.
6. The water levels at the Se Bangfai river mouth are determined by the combined Mekong discharge recorded at Nakhon Phanom and the Se Bangfai discharge and the conveyance capacity of the Mekong and imposed level conditions in the reach That Phanom – Mukhdahan and beyond, downstream of the confluence.
7. Discharge records for Nakhon Phanom are available since 1924. The series is generally consistent with the flow at Mukhdahan.

#### **Hydrological characteristics**

8. Average annual rainfall in Se Bangfai ranges from about 2,500 mm in the upper reaches to less than 1,600 mm near the mouth. Rainfall occurs mainly from May to September with August as the wettest month on average.



9. Annual potential evapo-transpiration in the lower Se Bangfai amounts some 1,550 to 1,600 mm. The values are highest in the period March-May. Evaporation exceeds rainfall from October till April.
10. Annual average flow at Mahaxai amounts 7,000 MCM. The runoff depth is about 1,650 mm, i.e. higher than the average annual rainfall at mouth. The monthly flow is highest in August followed by September and July.
11. The average annual flow at Highway Bridge is estimated at 12,700 MCM or 1,480 mm.
12. The regime of the Se Bangfai coincides with that of the Mekong, hence floods on both rivers may occur at the same time which will aggravate the flooding.
13. From December 2009 onward the discharge of the Se Bangfai will be augmented with the flow of Nam Theun via the Regulating dam and Downstream Channel of the hydro-power plant. On average the discharge of the Se Bangfai will increase with 220 m<sup>3</sup>/s.

### **Hydrological hazard**

14. The hydrological hazard expressed as extreme discharge and flood volume for selected return periods have been determined for Mahaxai on Se Bangfai and Nakhon Phanom on Mekong. The GEV-distributions fit well to the distributions of both annual maximum discharge and annual flood volume.
15. Flood volumes and to a lesser extent flood peaks on Mekong and Se Bangfai do correlate.
16. The bivariate distribution of annual flood peaks and flood volumes in the Mekong at Nakhon Phanom can be described by regression equations and GEV-distributions for the regression residuals.
17. The discharge rating of the Mekong at Mukhdahan, which acts as downstream boundary in the hydraulic model, varies from year to year. For a fixed high discharge the water level varies +/- 0.75 m about the assumed rating in the hydraulic model. This affects the water level at That Phanom with +/- 4 dm.

### **Flood hazard**

18. The flooding in the lower Se Bangfai is complex and its extent is preferably modelled with a 1D-2D hydraulic model. Such model eliminates subjectivities in the schematization of the interaction between river and flood plain.
19. The 1D hydraulic model of the Se Bangfai as developed and calibrated by LNMC in 2009 leads on average to 7 to 8 dm higher water levels than observed water levels at Highway Bridge. The roughness of the model has subsequently been adjusted to arrive at an on average unbiased result at the Highway Bridge.
20. The quality of the model to correctly simulate floodplain flooding is uncertain, in absence of detailed data on flooding extent.
21. For flood hazard assessment in regions of combined floods use is made of the Monte Carlo procedure, taking into account the joint occurrence of peak flows and flood volumes in Mekong and Se Bangfai.
22. The water levels in Se Bangfai river and floodplains for some 90 combinations of Mekong and Se Bangfai peak flows and flood volumes have been determined with the hydraulic model to create a database the Monte Carlo procedure is drawing from to determine the flood hazard.

23. The flood hazard for the following cases have been determined including preparation of flood depth and flood extent maps:
  - Case 1: situation with no embankments, i.e. the river conditions till 2002;
  - Case 2: situation with embankments along the left bank since 2002;
  - Case 3: situation with embankments on both banks, i.e. the planned layout.
24. The embankment protect the downstream floodplains but back up the water further upstream. The situation with only embankments on the left is profitable for the downstream floodplain locations on the left but disadvantageous for locations on the right.
25. The flood extent derived by the model for the lower reach of the Se Bangfai is qualitatively in line with flood maps of the year 2000.
26. Effects of a bypass channel from Se Bangfai to Mekong to improve the drainage conditions have been investigated. A 200 m wide bypass with bed level at 138 masl conveyed for selected years up to 500 to 1000 m<sup>3</sup>/s, lowering the maximum water levels along the rivers near the off-take with about 0.5 to 1.0 m. Similar values are found for the flood plains with substantially reduced flood duration. For the 100-year water level a maximum reduction (near the off-take) of 1.83 m is observed.

## 7.2 Recommendations

To improve the flood hazard assessment for the lower Se Bangfai the following recommendations are made:

1. Establish a discharge measuring station on the Se Noy and (temporary) water level stations in the river (one additional) and flood plains downstream of Highway Bridge.
2. Carry out a detailed topographic survey of river, floodplain and embankment levels from Mahaxai to river mouth and develop an accurate DEM.
3. Update the land use maps valid for flood and dry seasons.
4. Develop a new 1D/2 D hydraulic model of the lower Se Bangfai including the Mekong from Nakhon Phanom to Mukhdahan. With the availability of the DEM and land use data the development of such a model is much easier than of a 1D-model as the river-floodplain interaction is objectively derived from the DEM.
5. Simulate the water level and flow conditions in the Se Bangfai river and flood plain downstream of Mahaxai for the selected 90 combinations of water levels at That Phanom and discharge hydrographs at Mahaxai under different river and flood plain settings (Cases 1 to 3 and bypass channel).
6. Apply the Monte Carlo procedure to arrive at the water levels for selected return periods.
7. For design purposes always verify your calculations on flood levels with the larger values of two cases:
  - 7.a Case 1: 100 year peak flow at Mahaxai with annual peak level at mouth (derived from annual peak flow at Nakhon Phanom),
  - 7.b Case 2: annual peak flow at Mahaxai and 100 year peak level at mouth (derived from annual peak flow at Nakhon Phanom).In both cases the maximum effect of bed level changes on the discharge rating at Mukhdahan should be taken into consideration, as well as effects of extreme winds (speed and direction) during typhoons.

## 8 Literature

ADB (2004)

Summary Environmental and Social Impact Assessment Nam Theun 2 Hydroelectric Project in Lao People's Democratic Republic.

Asian Development Bank, November, 2004.

Malone, Terry (2007)

URBS Calibration Report – Basin 32. Se Bangfai.

MRC, May, 2007

MRC (2007)

Review of the hydraulic Study for Discharges from the NT2 Regulating Pond and Impacts on the Xe Bang Fai.

Mekong River Commission Secretariat, November, 2007.

Mekong Secretariat (1981)

The Se Ban Fai Plain, Lao PDR. Feasibility study of floodway and small structures.

Interim Progress Report. MKG/R314, May 1981

Verger, Robert (2006)

“Surplus or no surplus” of water in the Se Bangfai river?

MSc thesis University of Twente, Department of Civil Engineering, Enschede, The Netherlands, March-June 2006



## **Appendix 2 Flood Damage Assessment and Flood Risk Assessment**

## Lower Se Bangfai, Mapping flood levels, flood depths, flood damages and flood risks

### SUMMARY AND CONCLUSIONS

- *The Best Practise Guidelines for Flood Risk Assessment in the Lower Mekong Basin* gives the methodology to produce maps of flood levels, flood depths, flood damages and flood risks. These have been applied for the Xe Bang Fai area following the absolute damages assessment approach for combined flooding (tributary and mainstream flooding).
- The Flood hazard has been assessed with the aid of the ISIS model for four situations
  1. No measures (embankment, diversion) along the Se Bang Fai/ Se Noy;
  2. A left embankment on the downstream part of the Se Bang Fai;
  3. A left and right embankment on the downstream part of the Se Bang Fai;
  4. A diversion canal creating a shortcut from the Se Bang Fai to the Mekong.
- The embankments prevent water flowing out of the SBF (left side or both sides), but upstream and downstream of the embankment water can still inundate the surrounding areas and flow partially behind the embankment. The diversion canal alternative, as currently schematised, does not evacuate water from the surrounding areas; it only links the SBF with the Mekong.
- Sixteen water level maps are the result (combinations of return periods 2, 10, 25 and 100 years, and 'no embankment', 'left embankment', 'left and right embankment', 'diversion canal'). By subtracting the Digital Elevation Model values from the water levels the water depth maps are produced.
- Based on the damage inventories, graphs have been constructed giving the relationship between a certain type of damage and the water level at a point in or near the affected area. Damage figures for certain flood return periods are extracted from this curve.

The damages for housing, agriculture and infrastructure/ relief are in the following table:

Damage type	Damage (10 <sup>6</sup> US\$) 2 year r.p.	Damage (10 <sup>6</sup> US\$) 10 year r.p.	Damage (10 <sup>6</sup> US\$) 25 year r.p.	Damage (10 <sup>6</sup> US\$) 100 year r.p.
Housing	0.01	0.05	0.08	0.12
Agriculture	1.91	6.83	9.64	13.88
Infrastructure	0.28	0.89	1.24	1.77
Total	2.20	7.77	10.96	15.77

- From the return period and the damage as given by the above table the probability – damage curve is produced. The expected damage or risk can be determined by calculating the area under the curve. For the Nong Bok district the expected annual risks are:

Damage type	Risk (10 <sup>6</sup> US\$/yr)
Housing	0.014
Agriculture	2.605
Infrastructure	0.362
Total	2.981



## **Mapping flood levels, flood depths, flood damages and flood risks in the Se Bangfai lower catchment area, Lao PDR**

### Introduction

The '*Draft Best Practise Guidelines for Flood Risk Assessment in the Lower Mekong Basin*' gives the methodology to produce maps of flood levels, flood depths, flood damages and flood risks for the Cambodian and Vietnamese transboundary area in the delta of the Lower Mekong. This methodology is, in general, also applied for the lower Se Bang Fai catchment area in Laos. The differences are due to the limited number of hydraulic modelling nodes in Se Bang Fai, the hilly terrain (compared to the flat delta areas), and the proposed measures. Below the steps to come to the different types of maps are briefly explained, indicating the differences with the methodology described in the Guidelines mentioned above. In the Final version of the Guidelines the assessment approach for combined flooding as experienced in the Se Bangfai area will be incorporated.

### Damage and risk calculations

As is described in detail in the '*Draft Best Practise Guidelines for Flood Risk Assessment in the Lower Mekong Basin*', two approaches for damage and risk calculations may be applied: the absolute approach and the relative approach. The FMMP-C2 looks at damages and risks for housing, agriculture and infrastructure/ relief. For the absolute approach, damage data at district level are available from Governmental institutes, for the relative approach detailed land use maps must be available. For the Se Bang Fai area only limited information is available within the FMMP-C2 on village locations, giving an indication on housing (based on household figures). The other two damage categories considered in the project, agriculture and infrastructure/ relief, are not (yet) on hand. Therefore, at this stage, the absolute approach has to be followed, using the damage reports from the district authorities as collected in Stage 1 of FMMP-C2.

### Geographic Information System (GIS) data

To create flood level, flood depth, flood damage and flood risk maps several digital data sets need to be available: see the FRA Guidelines. The maps are created with ArcGIS (ArcMap/ArcInfo). The map layers need all to have the same datum and projection in order to be able to combine them. The standard at the MRC for the datum is Indian 1954, while the standard MRC projection for Lao PDR is UTM zone 48 North. As the data sets from the hydraulic model use another datum, they were converted to Indian 54.

### Flood level and flood depth maps

The water level calculations in the hydraulic model ISIS are based on the levels of both the rivers Mekong and the Se Bang Fai/ Se Noy. Different combinations of water levels in the two rivers, together with various return periods, have been calculated by ISIS. In addition three measure scenarios are modelled with ISIS (giving a total of 90 combinations):





- 1) No measures (embankment, diversion) along the Se Bang Fai/ Se Noy;
- 2) A left embankment on the downstream part of the Se Bang Fai;
- 3) A left and right embankment on the downstream part of the Se Bang Fai;
- 4) A diversion canal creating a shortcut from the Se Bang Fai to the Mekong.

The embankments prevent water flowing out of the SBF (left side or both sides), but upstream and downstream of the embankment water can still inundate the surrounding areas and flow partially behind the embankment. The diversion canal, as currently schematised, does not evacuate water from the surrounding areas; it only links the SBF with the Mekong.

The new schematisation in ISIS for the Se Bang Fai/ Se Noy catchments resulted in water levels for 264 nodes (cross-section nodes and reservoir nodes) in the Se Bang Fai, Se Noy and the Mekong. In addition, connected to each (central) cross-section node in the Mekong, coordinates of 50 to 90 cross-section points are available, covering a width up to 2 km perpendicular to the Mekong flow. These additional points are assumed to have the same water level as the central node. Also additional cross-section data is available for the Se Bang Fai, but without coordinates and covering only a few hundred meters wide. These have not been used.

Most of the flat areas in the Se Bang Fai catchment are schematized in the ISIS model with reservoirs. ISIS assumes a horizontal water level in each reservoir, represented by one node per reservoir. The reservoir limits follow more or less the isohypses, but according to the DEM the terrains in most reservoirs seem to have a slope, in particular the ones further away from the Mekong. Therefore the reservoirs are not used in the interpolations for creating the water level maps; only their hydraulic node.

With MatLab (also a spreadsheet could be used) the annual maximum water levels for the return periods of 2, 10, 25 and 100 years are distilled from the ISIS data. In Access these maximum levels for the four return periods and for each of the four scenarios (so 16 datasets in total) are merged into one table and linked to the 264 nodes in the GIS and to the Mekong cross-section points (27 central cross-section points linked with 1902 'lateral' cross-section points).

X	Y	Node_Label	Node_Type	River	NoB_002	NoB_010	NoB_025	NoB_100	LB_002	LB_010	LB_025	LB_100	LRB_002	LRB_010	LRB_025	LRB_100	Div_002	Div_010	Div_025	Div_100
481291.724	1876908.485	XBFI2-22329	RIVER_SECTION	XBF	140.32	141.23	141.65	142.12	140.17	141.2	141.67	142.19	140.47	141.43	141.87	142.42	139.34	140.5	141.07	141.47
480916.696	1876322.662	XBFI2-23184	RIVER_SECTION	XBF	140.23	141.17	141.6	142.06	140.09	141.14	141.61	142.12	140.38	141.36	141.81	142.34	139.31	140.48	141.05	141.45
480666.367	1875735.252	XBFI2-24040	RIVER_SECTION	XBF	140.16	141.12	141.55	142	140.03	141.09	141.57	142.06	140.31	141.31	141.76	142.29	139.29	140.47	141.04	141.44
481244.71	1875018.265	XBFI2-24863	RIVER_SECTION	XBF	140.1	141.08	141.51	141.95	139.97	141.04	141.52	142.01	140.25	141.26	141.71	142.23	139.27	140.45	141.02	141.42
481511.727	1874088.645	XBFI2-25698	RIVER_SECTION	XBF	140.04	141.05	141.47	141.91	139.91	141	141.49	141.97	140.18	141.21	141.67	142.18	139.26	140.44	141.01	141.41
482081.438	1873181.614	XBFI2-26510	RIVER_SECTION	XBF	139.98	141.02	141.45	141.88	139.86	140.97	141.46	141.94	140.12	141.16	141.62	142.13	139.24	140.43	141	141.41
482979.165	1872827.44	XBFI2-27333	RIVER_SECTION	XBF	139.93	141	141.43	141.87	139.82	140.94	141.44	141.92	140.05	141.12	141.58	142.09	139.23	140.42	141	141.4
484092.691	1872602.841	XBFI2-28157	RIVER_SECTION	XBF	139.88	140.98	141.41	141.84	139.77	140.92	141.42	141.9	139.99	141.07	141.54	142.04	139.22	140.41	140.99	141.39
483566.14	1871851.301	XBFI2-29019	RIVER_SECTION	XBF	139.82	140.94	141.38	141.81	139.71	140.88	141.39	141.86	139.91	141.01	141.49	141.98	139.12	140.39	140.98	141.38
482522.102	1871378.787	XBFI2-29882	RIVER_SECTION	XBF	139.74	140.9	141.35	141.77	139.64	140.84	141.36	141.82	139.82	140.94	141.43	141.91	139.18	140.38	140.96	141.37
481641.61	1870628.386	XBFI2-30745	RIVER_SECTION	XBF	139.66	140.85	141.3	141.7	139.56	140.78	141.3	141.75	139.72	140.88	141.38	141.85	139.17	140.36	140.95	141.36
480749.646	1870092.812	XBFI2-31608	RIVER_SECTION	XBF	139.56	140.79	141.24	141.62	139.47	140.71	141.23	141.67	139.64	140.83	141.34	141.8	139.15	140.34	140.92	141.33
480192.56	1869671.857	XBFI2-32500	RIVER_SECTION	XBF	139.48	140.75	141.2	141.58	139.4	140.65	141.19	141.62	139.54	140.77	141.29	141.74	139.13	140.32	140.91	141.32
479452.346	1869327.785	XBFI2-33392	RIVER_SECTION	XBF	139.39	140.71	141.16	141.54	139.32	140.6	141.15	141.58	139.44	140.71	141.24	141.68	139.11	140.3	140.89	141.31
478786.053	1868977.185	XBFI2-34285	RIVER_SECTION	XBF	139.31	140.68	141.13	141.51	139.23	140.56	141.11	141.55	139.33	140.66	141.2	141.64	139.09	140.28	140.88	141.29
478121.307	1868704.357	XBFI2-35177	RIVER_SECTION	XBF	139.26	140.64	141.09	141.46	139.14	140.5	141.06	141.5	139.22	140.59	141.15	141.58	139.07	140.27	140.86	141.28
477223.58	1868617.973	XBFI2-36070	RIVER_SECTION	XBF	139.22	140.61	141.05	141.41	139.09	140.45	141.01	141.46	139.15	140.54	141.1	141.53	139.06	140.25	140.85	141.26
475750.589	1868729.22	XBFI2-36991	RIVER_SECTION	XBF	139.18	140.56	141	141.36	139.05	140.39	140.96	141.4	139.1	140.48	141.05	141.48	139.04	140.23	140.82	141.25
474852.097	1869401.986	XBFI2-37912	RIVER_SECTION	XBF	139.13	140.53	140.95	141.32	139.01	140.33	140.91	141.36	139.06	140.42	140.99	141.43	139.01	140.2	140.81	141.23
474239.226	1870162.165	XBFI2-38833	RIVER_SECTION	XBF	139.09	140.49	140.91	141.28	138.97	140.27	140.86	141.32	139.01	140.37	140.94	141.38	138.99	140.18	140.79	141.21
474058.526	1871045.014	XBFI2-39754	RIVER_SECTION	XBF	139.05	140.45	140.86	141.25	138.93	140.21	140.81	141.28	138.96	140.31	140.88	141.34	138.97	140.16	140.77	141.19
473340.943	1871894.544	XBFI2-40676	RIVER_SECTION	XBF	139	140.42	140.82	141.22	138.89	140.16	140.76	141.25	138.92	140.25	140.83	141.3	138.95	140.14	140.75	141.18
473324.279	1873023.381	XBFI2-41596	RIVER_SECTION	XBF	138.96	140.39	140.79	141.19	138.85	140.11	140.71	141.21	138.88	140.2	140.79	141.26	138.93	140.12	140.73	141.16
472902.944	1873663.654	XBFI2-42518	RIVER_SECTION	XBF	138.92	140.35	140.75	141.16	138.82	140.06	140.68	141.19	138.84	140.15	140.74	141.23	138.91	140.1	140.72	141.15
504961.698	1901292.09	SP109D	RESERVOIR	XBF	147.28	148.15	148.29	148.6	146.44	148.28	148.65	148.65	148.65	148.65	148.65	148.65	147.1	147.96	148.1	148.39
512905.016	1900274.02	SP116D	RESERVOIR	XBF	146.7	148.05	148.2	148.52	145.79	147.99	148.17	148.57	146.24	148.35	148.57	148.96	146.53	147.93	147.99	148.29
504672.271	1897764.966	SP131D	RESERVOIR	XBF	146.7	147.59	147.74	148.07	146.14	147.57	147.75	148.14	146.58	147.97	148.21	148.62	146.43	147.33	147.48	147.78
510065.47	1894848.69	SP132D	RESERVOIR	XBF	146.75	147.57	147.71	148.05	145.62	147.55	147.72	148.12	146.04	147.95	148.18	148.6	146.53	147.3	147.45	147.75
503957.305	1893311.387	SP143D	RESERVOIR	XBF	146.35	147.21	147.38	147.76	145.3	147.21	147.41	147.86	145.8	147.7	147.96	148.42	146.08	146.87	147.04	147.39
507061.81	1893065.788	SP146D	RESERVOIR	XBF	146.45	147.23	147.39	147.74	145.32	147.22	147.42	147.85	145.82	147.69	147.95	148.41	146.2	146.91	147.07	147.4
507067.594	1886595.996	SP162D	RESERVOIR	XBF	138.48	138.49	138.75	139.73	138.48	138.53	138.94	140.17	138.49	139.32	140.42	142.61	138.48	138.49	138.5	138.86

To create a water level map with the water level info attached to the ISIS nodes in the GIS (264 + 1902), an interpolation needs to be done. There are many methods to create

a continuous surface based on spatial points with values. The type of data, the spatial distribution of the points, the range in the values etc. determine the appropriate method. A few methods have been considered for creating the Se Bang Fai water level maps (IDW, Spline, Kriging, Natural Neighbours). Although no in-depth analysis has been done, the Inverse Distance Weighting (IDW) method seemed to be the most suitable. It has the option to include 'barriers' or 'linear discontinuities', which suits the inclusion of embankments or canals in the interpolation. Details on the IDW interpolation can be found on Internet.

The IDW parameters set in ArcGIS are: power = 1, number of points to include = 12, distance to search for points = variable, output grid cell size = 50 m.

Sixteen water level maps are the result (combinations of return periods 2, 10, 25 and 100 years, and 'no embankment', 'left embankment', 'left and right embankment', 'diversion canal').

By subtracting the Digital Elevation Model values from the water levels the water depth maps are produced (also 16).

### Flood damage maps

The Se Bang Fai (Nong Bok) flood damage data in the 'absolute approach' originate from Lao Government institutes, who inventories damages after each major flood. Based on these inventories graphs can be constructed giving the relationship between a certain type of damage (e.g. housing, agriculture, infrastructure) and the water level at a point in or near the affected area (gauging station, hydraulic modelling node). The damage curves are linked to the long-term flood levels from the same gauge station, resulting in a damage probability curve. Damage figures for certain flood return periods are extracted from this curve.

The damages for housing, agriculture and infrastructure/ relief are summarised in the following table:

Damage type	Damage (10 <sup>6</sup> US\$) 2 year r.p.	Damage (10 <sup>6</sup> US\$) 10 year r.p.	Damage (10 <sup>6</sup> US\$) 25 year r.p.	Damage (10 <sup>6</sup> US\$) 100 year r.p.
Housing	0.01	0.05	0.08	0.12
Agriculture	1.91	6.83	9.64	13.88
Infrastructure	0.28	0.89	1.24	1.77
Total	2.20	7.77	10.96	15.77

### Flood risk maps

The relationship between the return period and the damage as given by the above table can be plotted in a graph (probability – damage curve). The expected damage or risk can be determined by calculating the area under the curve.

For the Nong Bok district the expected annual damage or risks are:

Damage type	Risk (10 <sup>6</sup> US\$/yr)
Housing	0.014
Agriculture	2.605
Infrastructure	0.362
Total	2.981

### Mapping results

The interpolation of the point water levels is based on only a few points in the areas further away from the rivers. The error, in particular vertically, is considerable and increases with the distant to a hydraulic node. The interpolation result is far less detailed than the DEM, so when the DEM values are subtracted from the (interpolated) water levels, the resulting water depth will reflect the details of the DEM. In the case of the embankment scenarios, when no or little water is assumed to get behind the dikes, the maps will still show inundated areas because of the inaccuracies in the interpolation.

The vertical accuracy of the DEM is estimated at  $\pm 1$  m; that of the ISIS water levels  $\pm$  ?? m.

There is only one way to improve the interpolation accuracy: by getting more points with water levels (hydraulic nodes). As an alternative: if it is known that the areas behind an embankment stay dry during high water levels, the water depths of these areas can artificially be set to zero with the GIS, or these are can be 'masked'.

The flood depths maps and flood risk maps are presented in the following pages.

- 0 - 0 - 0 -

## Appendix 3 Socio-economics and agriculture



## CONTENTS

1	INTRODUCTION	3
2	PROJECT AREA	3
2.1	Location and area	3
2.2	Population and living conditions	5
2.2.1	<i>Community characteristic</i>	5
2.2.2	<i>Household characteristics</i>	5
2.2.3	<i>Housing, structures and other assets</i>	6
2.2.4	<i>Occupation and income</i>	8
2.2.5	<i>Access to water, sanitation and electricity</i>	9
2.2.6	<i>Access to health care</i>	9
2.3	Land use	9
2.4	Existing agriculture	10
2.4.1	<i>Rice cropping</i>	11
2.4.2	<i>River bank vegetables</i>	13
2.4.3	<i>Upland crops</i>	13
2.4.4	<i>Use of agrochemicals and fertilizers</i>	13
2.5	Crop benefits	14
2.6	Fisheries	15
2.7	Aquaculture	17
2.8	Livestock and animal husbandry	17
3	FUTURE AGRICULTURAL DEVELOPMENT	18
3.1	Crops and crop calendar	18
3.1.1	<i>Staple rice</i>	18
3.1.2	<i>Commercial rice</i>	19
3.1.3	<i>Sugarcane</i>	20
3.1.4	<i>Cotton</i>	20
3.1.5	<i>Crop calendar</i>	21
3.2	Future without project	21
3.3	Future with flood protection project	22
3.4	Future with flood protection and irrigation project	22
4	EXPECTED AGRICULTURAL NET BENEFITS	23
4.1	Future with flood protection measures	23
4.2	Future with flood protection and irrigation development	23
4.2.1	<i>Nongbok district</i>	23
4.2.2	<i>Xaybouly district</i>	23

## FIGURES

<i>Figure 2.1</i>	<i>Location of the Xe Bangfai project area</i>	4
<i>Figure 2.2</i>	<i>Location of the project area in the Nongbok District, Laos</i>	4
<i>Figure 2.3</i>	<i>Monthly rainfall statistics of station That Phanom, Period 1966-2005</i>	12

## TABLES

<i>Table 2.1</i>	<i>Existing agricultural land use, 2009</i>	11
<i>Table 2.2</i>	<i>Net benefit of selected crops</i>	15
<i>Table 2.3</i>	<i>Percentage of fish catch caught at different locations</i>	16
<i>Table 3.1</i>	<i>Possible farming calendar for the Lower Xe Bangfai area</i>	21
<i>Table 3.2</i>	<i>Future agricultural land use</i>	23





## 1 INTRODUCTION

In the Stage 1 Workshop of the Component 2 of the Flood Management and Mitigation Program (FMMP-C2), held in Ho Chi Minh City on 25 September, 2008, it was agreed that the preparation of an Integrated Flood Risk Management Plan for the Lower Se Bang Fai in Lao PDR will be one of the Demonstration Projects (DP) during the Stage 2 Implementation of the FMMP-C2.

The scope of this project was presented in the Workshop as follows:

1. The strategic directions as formulated under Stage 1 will be translated into IFRM plans. For this planning exercise the input of BDP is required for the formulation of land use and water resources development scenarios in these areas.
2. The plan will consist of a number of sub projects which will be formulated.
3. Terms of References will be prepared for the preparation of priority projects of the IFRM plan

The Demonstration Projects are also meant to apply best practice guidelines that are developed under the FMMP-C2. The following best practice guidelines are intended to be used in the implementation of this Demonstration Project:

1. Guidelines for IFRM Planning and Impact Evaluation;
2. Guidelines for the Development and Design of Structural Measures.

The Demonstration Project is an extension of the activities that were carried out during the Stage 1 regarding the flood risk assessment and development of strategic directions in the SE Bang Fai focal area.

## 2 PROJECT AREA

### 2.1 Location and area

The Xe Bangfai flows mainly through Khammoune Province in the central part of Lao PDR. The Upper Xe Bangfai originates in Boualapha District, before flowing into Mahaxai District. The river then flows through Xe Bangfai District before entering the Lower Xe Bangfai flood plain in which it forms the southern border of Nongbok District, Khammoune Province, and the northern border of Xaybouli District, Savannakhet Province.

The Lower Xe Bangfai project area is located in the MRC Basin Development Plan (BDP) Sub-area 4L. The Figure 2.1 and Figure 2.2 show the location of the project area in Lao.



**Figure 2.1** Location of the Xe Bangfai project area

**Source:** Nam Theun-2 Power Company, 2005b

The project area is the flood-prone area located along the Lower Xe Bangfai River, downstream of the crossing with the National Road Nr 13. To the west the area is bounded by the Mekong River and is part of the Khammoune province. To the east, in the Savannakhet Province, the Road nr 13 forms the boundary.

The area covers the whole area of Nongbok district and some villages of the Middle Xe Bangfai district on the right bank of Xe Bangfai River, and part of the Xayboully District on the left bank of the river. See Map in **Error! Reference source not found.**



**Figure 2.2** Location of the project area in the Nongbok District, Laos

The flood protection for the area is mainly establishment of dyke on the right and left banks of the river and partly along the Mekong to control flood water. The development of Xe Bangfai irrigation schemes may go beyond the flood prone areas. These areas are to be included in the overall evaluation of the water resources development and management in the Lower Xe Bangfai.

## 2.2 Population and living conditions

### 2.2.1 Community characteristic

According to the Nongbok District statistics, the population in 2006 was about 41,000 people with 7,600 households. Average household size was 5.41 persons and the average annual population growth rate during the period of 2001-2006 was 0.49%. Sex distribution was as 49% for male and 51% for female in almost all age groups except group more than 65 years old.

Ethnicity in Nongbok district is mainly Lao (71%) and it is followed by Phouthyai (25%), Mangkong (3%) and King (1%). Most of household are headed by male occupying 95% of the total families in the district.

The communities are culturally and linguistically homogenous. This contributes to effective social and community networks that are important assets for the collective actions around flood planning and management.

<b>Household Characteristics Xe Bangfai Focal Area, Lao PDR</b>			
<i>Indicator</i>		<i>Unit</i>	<i>District</i>
HH size (aver.)		Pers.	5.4
HH head	Male	%	95.0
	Female	%	5.0
Male/female ratio		ratio	1.02
Children < 15 years		%	35.5
Dependency ratio		ratio	0.71
<i>Source: District Flood Vulnerability Database, Lao PDR</i>			

The implications for social vulnerability include:

- (i) The large proportion of children in Nongbok tends to increase vulnerability to the impacts of flooding. Children are often at risk of physical injury and drowning during floods. They may be more susceptible to becoming sick, for instance, if there is no safe drinking water or proper sanitation during floods. If flooding damages schools, children's education will be disrupted. Moreover, the high dependency ratio places extra burdens on parents and other adults to provide for children's needs for food, shelter, etc.

### 2.2.2 Household characteristics

Households in Nongbok have, on average, 5.4 persons. The majority (95%) are headed by men who slightly outnumber women in the district population. However, more than one-third of the population (35%) is under the age of 15 years. This high proportion of children in combination with elderly people living in the district results in an age dependency ratio of 0.71. This means that every working-age person in the district must produce enough to support his or her own needs plus 70% of the needs of another, dependent person.

<b>Household Characteristics Xe Bangfai Focal Area, Lao PDR</b>		
<i>Indicator</i>	<i>Unit</i>	<i>District</i>
HH size (aver.)	Pers.	5.4
HH head	Male	95.0
	Female	5.0
Male/female ratio	ratio	1.02
Children < 15 years	%	35.5
Dependency ratio	ratio	0.71
<i>Source: District Flood Vulnerability Database, Lao PDR</i>		

The implications for social vulnerability include: The large proportion of children in Nongbok tends to increase vulnerability to the impacts of flooding. Children are often at risk of physical injury and drowning during floods. They may be more susceptible to becoming sick, for instance, if there is no safe drinking water or proper sanitation during floods. If flooding damages schools, children's education will be disrupted. Moreover, the high dependency ratio places extra burdens on parents and other adults to provide for children's needs for food, shelter, etc.

### 2.2.3 Housing, structures and other assets

<b>Structures Xe Bangfai Focal Area, Lao PDR</b>		
<i>Indicator</i>	<i>Unit</i>	<i>District</i>
Main structures – total	No.	9,030
Residential - % total	%	88.4
<i>Permanent</i>	%	20.0
<i>Semi-permanent</i>	%	70.0
<i>Temporary</i>	%	10.0
<i>HH owns structure</i>	%	100.0
Commercial - % total	%	10.6
<i>Permanent</i>	%	20.6
<i>Semi-permanent</i>	%	79.4
<i>HH/business owns structure</i>	%	100.0
Industrial - % total	%	0.2
<i>Semi-permanent</i>	%	100.0
Institution - % total	%	0.9
<i>Permanent</i>	%	40.5
<i>Temporary</i>	%	59.5
<i>Source: District Flood Vulnerability Database, Lao PDR</i>		

Residential and separate commercial structures account for, respectively, 88% and 11% of the main structures in the district; however, many business activities are accommodated in spaces that are attached directly to residential structures. These types of structures are generally owned by their occupants. Industrial and institutional structures make up about 1% of the total.

Permanent structures made from brick and/or concrete account for 20% of these structures; 70% are semi-permanent construction, generally wood; and, the remainder are constructed of thatch, bamboo and other temporary materials. Based on data provided by surveyed households, permanent and semi-permanent house structures tend to have similar areas and value.

Flood risks are a major factor in the sitting and design of housing in the focal area. In raised safe areas, people will construct one-story brick houses. However, in most areas, the traditional coping mechanisms include:

Housing Area & Value Xe Banfai Focal Area, Lao PDR		% HH	Area	Value
			m <sup>2</sup>	Kip million
Average			67	40.1
By house type	Permanent	84.3	66	39.8
	Semi-permanent	15.7	70	42.2
<i>Source: Household surveys, Lao PDR</i>				

- (i) Houses are raised 2.5-3 m on concrete poles to protect them against annual floods. The concrete poles have replaced wood poles that were traditionally used as they are more resistant to water logging.
- (ii) Retail shops, repair garages/workshops and other commercial structures are generally not raised. However, the foundation will be made stronger to withstand potential damage from flood waters.
- (iii) Within commercial structures, people frequently make provisions for temporary storage of inventory and equipment above the normal flood level that may occur within the structure. For commercial activities located in structures adjacent or attached to houses, the inventory and equipment will often be moved and stored within the raised house.
- (iv) Other industries such as rice mills will often be located on higher ground within the community to provide protection during floods.

There are also numerous small agricultural structures such as rice huts and animal shelters (the number is nearly equal to the number of main structures). These are all temporary structures.

In terms of household assets, people in Nongbok rely on motorbikes as their principal means of transport; less than 1% of district households own a car or truck. Although the district is bounded by the Se Bang Fai and Mekong rivers, only 2% of households own small boats (without motors); an even small proportion (0.5%) own larger, motorized boats. More than a third of households own a hand tractor, but very few if any households own other types of productive equipment such as mechanized tractors, water pumps, diesel generators, rice mills.

The implications for assessing the vulnerability of households to flood damages are as follows:

- (i) The traditional house form reduces the risks of flood damages to people's housing. In most years in Nongbok, there are no flood-affected houses; even in the serious floods in 2001 and 2005, there were on 2-3 damaged houses.
- (ii) The establishment of safe areas and/or the sitting of non-residential structures on higher ground help to minimize flood damages.
- (iii) However, the low proportion of households that own small or larger boats will be reflected in the lack of access that many people have during floods to health care and other services outside their immediate village. The lack of boats may also constrain local emergency response activities.

#### 2.2.4 Occupation and income

Main occupation in the district is in agricultural production including crops, fishery and working as hired labour in agriculture (68% of the population). 25 % of the population works as hired labour in Thailand, particularly in factories. Very few people do business, trading or offer services. This indicates that the population is directly depending on its immediate environment.

<b>Occupations, Economically Active Population Xe Bangfai Focal Area, Lao PDR</b>		
<i>Indicator</i>	<i>Unit</i>	<i>District</i>
Number of persons 18-60 yrs.	No.	24,098
Agriculture	%	63.5
Fishery	%	1.5
Agricultural labour	%	3.7
Construction labour	%	0.9
Other labour – Thailand	%	24.9
Business owner	%	1.9
Employee – private sector	%	0.8
Employee – government	%	2.8
<i>Source: District Flood Vulnerability Database, Lao PDR</i>		

- (i) Vulnerability to economic losses due to flooding is directly related to the proportion of people engaged in agricultural activities.
- (ii) The incidence of working people who migrate to Thailand reflects better job prospects and wages that are available to people living in Nongbok, as well as possible constraints on economic activities in the district (e.g., lack of agricultural land, non-farm employment). The higher wages contribute to the low poverty levels in the district. At the same time, however, the absence of younger family members during a flood event may increase household vulnerability. In addition, a greater burden is placed on women when adult men are absent from the household.

<b>Agricultural Production &amp; Income Xe Bangfai Focal Area, Lao PDR</b>		<i>Paddy Area</i>	<i>Prod. Sold</i>	<i>Annual Income</i>
		<i>ha</i>	<i>%</i>	<i>Kip million</i>
Overall	Average	2.2	39.6	20.1
By house type	Permanent	2.3	38.1	18.3
	Semi-permanent	1.5	47.3	29.7
<i>Source: Household surveys, Lao PDR</i>				

Each household has, on average, 2.2 ha of rice land. People living in semi-permanent structures have an average of 1.5 ha per household; that is, they have about 30% less productive land than households in permanent structures. Average annual income was 20.1 million Kip (2,365 US\$/year). Given the average size of household of 5.4 persons, it is equivalent to 36 US\$/capita/month.

### 2.2.5 Access to water, sanitation and electricity

Only about 1,000 households in the district (14%) is actually connected to piped water in the district town, most of family takes water from well and river. During floods people rely on rainwater, purchased water for washing and bathing.

There is no wastewater collection or treatment system in the district. There are 52% of total households having their own toilet/latrine, in most instances water-sealed. The remaining households have no facilities.

There is a high rate of households connected to national power grid (95%).

The implications for the assessment of social vulnerability to flooding include the following:

- (i) Due to inadequate supplies of safe drinking water and, particularly, poor sanitation conditions (defecation in the open and in paddy fields), there is a high risk of diarrhoea and dysentery.
- (ii) Bathing and washing clothes in flood waters increases the incidence of skin rashes and infections due to contamination of the water.

### 2.2.6 Access to health care

Floods in Nongbok are associated with a variety of health problems: diarrhoea and dysentery; malaria and dengue fever; colds; and, skin and eye infections.

In Nongbok district, the health care facilities include: 1 district hospital with 15 beds, 2 clinics and 10 dispensaries. The 2 clinics provide services for the 72 villages in the district, with a ratio of 3,797 households per clinic. There is one dispensary for each village cluster, or a district-wide ratio of 759 households per dispensary. Due to the lack of adequate medical facilities and the difficulties of travel during the flood season, many households rely on traditional herbal medicines to treat diarrhoea, dysentery and the various types of skin and eye infections. The implications for social vulnerability due to flooding include:

- (i) The inadequate (and often ill-equipped) health care facilities are a major source of people's vulnerability when they are injured and/or become ill during or following the flood.
- (ii) Due to the lack of adequate health care and/or the need to travel to obtain health care, there is a higher risk of extraordinary health care costs that strain the resources of households, particularly poor households.

## 2.3 Land use

<b>Land Uses, Xe Bangfai Focal Area, Lao PDR</b>				
<i>Indicator</i>	<i>Unit</i>	<i>District</i>	<i>Unit</i>	<i>District</i>
District area	%	100	ha	31,300
Rice land – rainfed	%	33.7	ha	10,548
Rice land – irrigated (originally)	%	7.3	ha	2,285
Upland crop land	%	5.5	ha	1,722
Plantation land	%	0.3	ha	94
Rural residential (gardens)	%	1.6	ha	501
Urban land	%	0.4	ha	125
Lakes, ponds & wetlands	%	8.7	ha	2,723
Forest - dry Dipterocarpus	%	30.0	ha	9,390
Forest - non-productive	%	11.3	ha	3,537
Communal	%	1.2	ha	376
<i>Source: District Flood Vulnerability Database, Lao PDR, 2006</i>				

Almost the entire territory of Nongbok district is land that contributes to the rural livelihoods of people living in the district. Cultivated land encompasses more than 45% of the district area and includes irrigated paddy (7%), rainfed paddy (34%) and other land such as upland crops land and residential gardens (6-7%). In addition, people rely on riverbanks, wetlands and forests to grow and/or harvest food crops, as well as for other productive uses such as building materials, medicines, etc.; together, these resources account for nearly 40% of the district area.

Legal title to agricultural land in Lao PDR generally takes the form of a land certificate issued by local authorities. In Nongbok district, the ratio of land certificates to households is 0.95, meaning that nearly all households have secure tenure to their productive land. Landless households account for 1.7% of all people in the district. All households in the district also have a land certificate for their residential land. The issues of social vulnerability to the impacts of flooding include:

- (i) The reliance of livelihoods on land and natural resources increases the direct and indirect costs of flooding. Household expenditures for food and other basic needs will increase if people are unable to cultivate vegetables in riverbank gardens or harvest forest or wetlands products they normally use for different purposes.
- (ii) Secure land tenure as well as house ownership (see section below) provide households with collateral that will facilitate their ability to obtain loans and other assistance to rehabilitate property damaged during a flood or to meet other households needs (health care, new agricultural inputs, etc.). This an important and positive point with regard to future development in a flood secure area, because it will allow access to micro-credit.
- (iii) People without productive land are at risk during a flood because, in most instances, they work as agricultural labour on other people's land. They lose this source of income if land is inundated for extended periods and/or the rice crop is damaged or destroyed. As they are generally poor, they have few alternative resources to meet basic or flood-induced needs (e.g., health care). In Nongbok, the needs of the small number of landless people may be effectively met through the strong family and social networks that exist.

## **2.4 Existing agriculture**

Rice cropping and vegetables growing are the main agricultural activities in the project area. Agriculture is the area's largest sector of employment. Vegetables and other crops are grown by residents on the somewhat elevated Xe Bang Fai river banks, as well as in the flood plains around natural lakes as water recedes. Lowland wet rice is cultivated in the lower lying areas.

In Nongbok district, 10,535ha of wet season rice of which is 50% for staple rice and the remain for commercial rice. The dry season rice was only 1,880ha under irrigation and 1,230ha of non-rice crops on river bank slopes cultivated after rainy season using residual soil moisture and flood recession. The existing cropping intensity was 97%. There would be a potential for irrigation development in the area to increase cropped area in dry season.

In Xaybouly district, where irrigation exists, wet season rice was 8,617ha and dry irrigated rice was 8,520ha. Beside rice cultivation in a low land, there was 2,884ha sugarcane on a highland, where flooding has no impact. The cropping intensity in the area was 165%. There would be no room for new irrigation development in the area except improving and/or modernizing existing irrigation schemes. See Table 2.1.



**Table 2.1 Existing agricultural land use, 2009**


Items	Nongbok	Xaybouly
<b>Gross area</b>	<b>31,300</b>	<b>NA</b>
<b>Non-agricultural land</b>	<b>17,150</b>	<b>NA</b>
<b>Agricultural land</b>	<b>14,150</b>	<b>14,500</b>
<b>Cultivated crop area</b>	<b>13,794</b>	<b>23,934</b>
<b>Cropping intensity</b>	<b>97%</b>	<b>165%</b>
<b>I Wet season cultivated land</b>	<b>10,684</b>	<b>11,772</b>
<b>A. Cultivated rice</b>	<b>10,535</b>	<b>8,617</b>
1. Staple Rice	5,268	8,617
2. Commercial rice	5,267	-
<b>B. Cultivated non-rice</b>	<b>149</b>	<b>3,155</b>
1. Chilly	-	9
2. Sweet corn	149	80
3. Sugarcane	-	2,884
4. Other crops	-	182
<b>II Dry season cultivated land</b>	<b>3,110</b>	<b>12,162</b>
<b>A. Cultivated rice</b>	<b>1,880</b>	<b>8,520</b>
1. Staple Rice	-	-
2. Commercial rice	1,880	8,520
<b>B. Cultivated non-rice</b>	<b>1,230</b>	<b>3,642</b>
1. Tobacco	35	112
2. Chilly	170	63
3. Sweet corn	53	94
4. Sugarcane	-	2,884
5. Other crops	746	489

Source: FMMP\_C2: Secondary data collection, April-June 2009

#### 2.4.1 Rice cropping

The Xe Bangfai plain is one of the 4 main rice production areas in central Lao. Success or failure of lowland rice is closely link to the natural flood cycle and every year part of the crop is damage by the flood. In the project area, there are two main types of rice production: rain-fed lowland (wet season from June till November) rice and irrigated lowland (dry season from December to April) rice.

The rainy season in the area maintains a duration of 5 months (May-September) occupying 87% of total annual rainfall. It plays an important role in wet season crop cultivation as cultivated area and cropping calendar. The dry season lasts 7 month (October-April), especially there is almost no rain in November-January. See Figure 2.3.

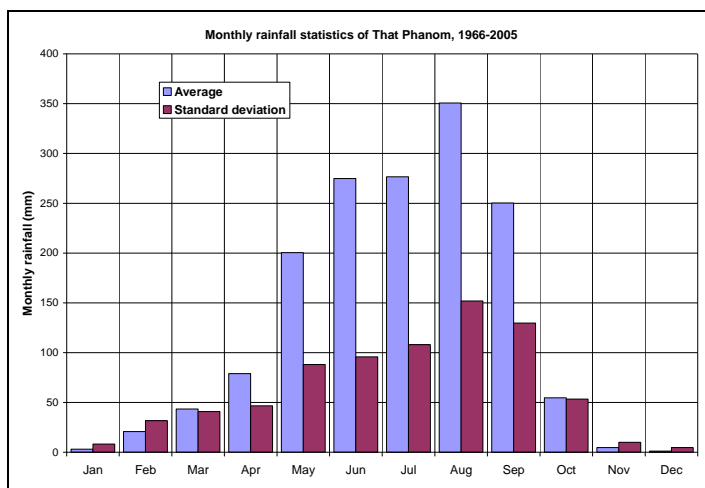

**Figure 2.3 Monthly rainfall statistics of station That Phanom, Period 1966-2005**

### Wet season rice

The rain-fed rice requires sometimes supplemental irrigation water by a diversity of small-scale irrigation systems. In the wet season 10,535 ha are cropped with a yield of 4.3 tons/ha.

Rice is the staple food for all households. More than half of the rice production is required to meet basic household consumption needs. However, sale of surplus rice in Thai markets is an important source of income for households in this district.

In years of heavy flooding, such as occurred in the rainy season of 2000, a large percentage of the cultivated area was damaged. Farmers report that rice production is very sensitive with flooding in the region (slightly higher or of longer duration than normal can make the difference between having a large or small harvest).

### Dry season rice

In dry season, the cultivated area is only 1,880 ha. It is irrigated by several small irrigation schemes. The average yield is 6.2 tons/ha for that period, much higher than in the wet season. Ideally the dry season paddy should provide supplementary rice to farmers, both for consumption and for sale on the local markets. However, the dry season cropping has not been as successful as envisaged. Most villagers see dry season rice cultivation as a potential supplement — not as a replacement — to the main rice crop grown during the rainy season.

The expansion of pump-based irrigation, and the economic rationale for this expansion, is increasingly problematic and questionable. This is due in part to (i) high water conveyance losses of the canal system; (ii) the loss of value of the Lao currency, the kip, making imports of fuel and chemical fertilizer more expensive; (iii) high price of electricity.

The market price for rice, however, remains relatively low. Installed about 10 years ago, all of the diesel-powered pumps along the Xe Bangfai River are not in operation, most having been used for a single season. The economics for the electric pumps are better but still marginal at best. Farmers are being told to repay the costs of these government-provided irrigation systems. This added expense is contributing to disillusionment and frustration felt by many farmers regarding dry season rice cultivation. This negative experience works against the setting-up of any collective action for flood management and development of the area in partnership with government representatives

Farmers have also encountered other major problems with dry season rice farming including pest infestation. Continued use of the electrical pumps appears to be dependent on large government subsidies and the strong encouragement of district officials. While local officials continue to report an expansion of the area of dry season rice farming, villagers report that in fact it is declining.

Even though the cash generation of dry season rice appears to be higher than the wet season rice, the farmers don't find it attractive to crop. The inputs appear to be much higher. The benefit is related to the input-output market prices. All in this results in a higher risk taking. The problem farmers might encounter could be the cash-flow for this more risky venture. This ought to be confirmed by more detailed investigations.

Although food security appears not to be an issue in the area, the Government has embarked on a major program of irrigation development along the Xe Bangfai; most villages along the Xe Bangfai now have irrigation pumps. Originally there were 9 gated-sluices and 25 pumping stations in the district serving the command area of 1,750ha.

The water to be discharged by the Nam Theung-2 dam provides an opportunity for increasing agricultural production during the dry season. A number of large irrigation scheme have been made and are being planned for the Xe Bangfai area, but recent experiences are reason for caution.

#### *2.4.2 River bank vegetables*

Cultivation of vegetables is done mainly by women, and it is an important activity which provides food and income to the families. About 25% of villagers are involved in riverbank gardening in the Nongbok and Xaibouly Districts in the lower Xe Bangfai region. The average size of riverside crop fields is 0.15 ha/household.

Vegetables are grown in 2 periods: September-December and December-February. The first crops are onion, yam, water melon, long bean, cucumber etc. These are grown in the moist fertile soil on the river banks and tributary banks.

The second vegetables are planted down the river bank as water recedes further. They are of shorter duration and must be harvested by February-March. Main crops are lettuce, garlic, chilly and eggplants.

#### *2.4.3 Upland crops*

Other upland crops and fruit trees represent a small proportion of agricultural activities in the district. Crops such as tobacco, corn and beans are grown where rice cannot be grown. According to 2009 statistics, there was 149ha of corn cultivated in wet season and total 1,230ha of non-rice crops cultivated in dry season. See **Error! Reference source not found.**

Part of the production is sold on local markets and tobacco forms the largest single source of cash income. Tobacco is sold not only on the provincial markets, but also in Vientiane and across the border in Thailand. The choice and volume of these crops is determined by market demands in Lao PDR and in Thailand.

#### *2.4.4 Use of agrochemicals and fertilizers*

In 2003, the FAO conducted a case study on pesticide use in Lao. The study found that pesticide use is relatively low compared to other countries of the region, and that active promotion of pesticides is not widespread. However, the study also found that pesticides

are widely available, and that most of those for sale are highly toxic. Folidol, a class 1a pesticide, was found to be the most widely available and used pesticide, even though it is officially banned. It was also reported that a clear trend toward increasing use of pesticides is noted, particularly by farmers producing for urban markets. Although these farmers are aware of the dangers, they repeatedly stated that they know of no other way to meet the demands of the market, consumers and middlemen, other than to use more pesticides. The study concluded that merely not promoting pesticides is not enough, and that more concerted policies, strategies, and action are urgently needed.

In general, pest attack on rice crops is low in Lao PDR. Although there is a range of pests mentioned both by farmers, officials and in the literature, these are rarely of economic importance. Consequently pesticide use per unit area of rice is low. A recent survey indicated that in Savannakhet Province 50% of farmers sprayed rice one or more times per year, with 25% sprayed once and 25% sprayed more than once. In general pesticide use is higher in irrigated areas, partly to protect the extra investment in the dry season irrigated crop, but partly because double cropping leads to an increase in the number and intensity of pests attacking the crop. Rice diseases are rarely treated with chemicals (e.g. fungicides), weed control with herbicides is also very rare.

Pesticide use for vegetable growing is believed to be significant. The number of treatments applied is apparently not excessive, but every farmer treats his vegetables with insecticides. There has been no analysis of pesticide residues in fresh produce in Lao PDR, since there are no laboratory facilities for this.

Inorganic fertilizers are used predominately on the dry season rice crop, but increasingly also in the wet season. The type of usage varies according to the recommendations of extension workers and local availability. Farmers mentioned using an NPK 16-20-0 compound fertilizer to "prime" the land at around 200 – 350 kg/ha followed by Urea 46-0-0 at around 50 kg/ha. These fertilizers contain no K, making the rice susceptible to diseases such as brown spot disease in K deficient conditions. Farmers and officials in the Xe Bangfai plain indicated that inorganic fertilizer use appears to follow no particular guidelines with respect to soil analyses or the analysis and usefulness of organic fertilizer. Some inorganic compound fertilizers appear to be used on the basis of availability from donors rather than on need. In the Xe Bangfai plain organic fertilizer, mainly manure, is used in combination with inorganic fertilizer at around 250 kg/ha; a relative low rate, but beneficial if applied annually.

## 2.5 Crop benefits

Representative crop-budgets for the project area were collected in April-June 2009 under framework of the FMMP\_C2 activities. The standard crop-budget forms were developed and the Lao Consulting Groups carried out the data collection at the field.

Economic benefit of crops were derived from financial benefit by applying conversion factors<sup>1</sup> (CF) to remove transfer-payments (taxes, tariffs, and loan interest). The CF was 70% for unskilled labour, 80% for fertilizers, 200% for electricity tariff<sup>2</sup> applied for agriculture and irrigation; and 90% for other cost items as seed, mechanical equipments.

For a rain-fed crops, high economic net benefit was found in commercial rice (690 US\$/ha) and it is followed by wet season cotton (407 US\$/ha), wet staple rice and sugarcane (383-384 US\$/ha).

---

<sup>1</sup> ADB Bac Hung Hai irrigation improvement project, Vietnam. Royal Haskoning 2009 and consultant estimates

<sup>2</sup> Electricity tariff for irrigation and agriculture was 295 Kip/kWh which is about half of average tariff applied for Industry and Government office

For irrigated crops, high economic net benefit was found in commercial rice (936 US\$/ha). It is followed by sugarcane (599 US\$/ha), corn (522 US\$/ha), and staple rice (504 US\$/ha). They are summarized in Table 2.2 and details are in Attachment 1 and 2.

**Table 2.2 Net benefit of selected crops**

No	Crops	Production (kg)	Revenue US\$	Total Inputs US\$	Physical input US\$	Financial NB US\$	Economic NB US\$
1	Wet Rice	4,300	759	516	223	243	384
2	Dry Rice (irrigated)	6,200	1,094	721	416	373	504
3	Wet Cotton	1,500	618	280	178	338	407
4	Dry Cotton	800	329	178	112	151	192
5	Wet Commercial rice	4,500	1,059	509	217	550	690
6	Dry commercial rice irrigated)	6,500	1,529	726	421	803	936
7	Rain-fed Sugarcane	45,000	794	546	340	248	383
8	Irrigated Sugarcane	65,000	1,147	647	434	500	599
9	Irrigated Corn	8,000	941	525	321	416	522
10	Rain-fed Corn	5,000	588	475	273	113	238

Source: FMMP\_C2: Survey data, April-June 2009

## 2.6 Fisheries

Next to rice cropping, fisheries are one of the most important livelihood activities in the Xe Bangfai basin, and many villagers devote much of their time and energy to fishing. Fishing activities in the mainstream Xe Bangfai River are most prevalent in the dry season, while people generally fish in wetlands, streams and inundated rice fields during the rainy season.

There are a wide variety of fishing methods and fishing gears utilized by villagers in the Xe Bangfai basin including nylon monofilament gill nets, spears, hook and line, cast nets, scoop nets and many types of trap, but also explosives and, poisonous plants. Drift and gillnets are the most important gear in terms of the size of fish landings made by fisherman from the Xe Bangfai

Seasonal fish migrations between the Mekong and Xe Bangfai rivers, and through the Xe Bangfai River and its tributaries, are an important characteristic of the river basin and are essential to the fisheries and livelihood security of the communities living in the Xe Bangfai basin. The first major fish migration of the year commences at the beginning of the monsoon season. When the rains begin in May or early June, seasonal streams begin flowing, and the water level and flow volume of the Xe Bangfai River begin to rise.

At that time, according to villagers, a large number of fish species begin migrating up the Xe Bangfai River from the Mekong River, while other fish species are believed to move from deep-water pools in the Xe Bangfai River. At around the same time that fish move up the Xe Bangfai River, they also begin to migrate up its larger tributaries.

After the fish migrations at the beginning of the rainy season have taken place, there is considerable fishing activity in wetlands for the duration of the rainy season, and no important fisheries in the large rivers during this time of the year. In October, as the rainy season ends, an important fishery based on migrating fishes of the cyprinid family takes place.

When the water recedes, many villagers make barrier traps (*tone*) at the edges of rice fields and on streams to catch fish, and in some cases large quantities of fish are caught. Fishing in ox bow lakes, natural depressions and streams is extremely important for people living in the Xe Bangfai basin, particularly for those communities situated away from the Xe Bangfai River and other major rivers as it is only during this period that many of these fish can be caught in locations away from the major rivers.

Ethnic Lao villagers have a number of traditional practices for catching fish including the trapping of wild fish in ponds when flood waters recede (*nong sa*) and communal taking of fish in wetland areas (*pha nong*). These systems are dependent on the seasonal flood cycle of the Xe Bangfai river system.

Wild capture fisheries are clearly one of the most important livelihood resources in the Xe Bangfai basin. While fisheries have always been important to local people, their relative importance to society may actually be increasing. In areas where rice production does not provide families with a supply of rice sufficient for an entire year, wild capture are their main means for getting rice — either through direct barter trade with other villages or through selling fish and using the money to buy rice.

After rice, fish is the most important item on the diet for all ethnic groups in the area. Fish are a significant component of the local economy. Fish traders from Khoua Xe (the trading centre at the Route 13 bridge crossing the Xe Bangfai River) and other population centres travel to riverside villages to buy fish on a regular basis, some villages selling tens of kilograms or more per day. In some areas, villagers sell their own fish at district centres. Marketing patterns differ from place to place. The sale of fish on local markets adds considerably to the income of most households.

Besides fish, many other living aquatic resources are gathered from rivers and wetlands by villagers. These aquatic resources include shrimp, snails, earthworms (used for fish bait), frogs, crabs and aquatic insects. These resources are especially important in villages with a small area of wet rice fields or fields that are particularly vulnerable to flooding. While many non-fish living aquatic resources are utilized as food within individual households, some people realize substantial income from their sale. Women and children often play the major role in the collection of these resources.

**Table 2.3 Percentage of fish catch caught at different locations**

From	Percentage of catch caught at different locations
Xe Bangfai River	54%
Xe Bangfai Tributaries	3%
Paddy fields	14%
Other small bodies of water	10%
Back swamps and natural ponds	19%
Total	100%

Source: Nam Theun-2 Power Company, 2005b

Families in the lower reach of Xe Bangfai catch on average 168 kg fish/HH/year, sufficient for daily consumption and the production of 2 - 8 jars (= 22 kg) of 'Padek' /HH/year. Padek, salted fermented fish, is the second staple food in Laos, after rice. The remaining catch, on average 20% or some 35 kg/HH/y, is sold on the market. Anecdotal information suggests that production has declined over the last 10-15 years. Average fish size and the number of species caught have also declined. The reason for the decline is thought to be over-fishing and use of small mesh monofilament gillnets.

Results from focus group discussions held in focal areas<sup>3</sup> showed in the Nongbok district 70-80% of the households fish for sale, and the remaining households only fishes for their daily consumption. The duration of fishing is reported to be 10-20 days. According to the group discussion, benefits from natural fishing for people living in flooded areas vary from 150-3,200 US\$/household in normal flood years to US\$ 290-6,400 for big flood years. The fishing is mainly from river and creeks, the amount of catch from rice field is only 14% of total catch as indicated in Table 2.3.

According to the MRC-Technical Paper<sup>4</sup> on fish yields, the data for typical yields of fish in paddy fields in Lao is limited. However, it is reasonable to expect that the fish yield in Lao would be lower than in the Cambodian and Vietnamese flood plains. The lower limits of natural fish in Cambodia and Vietnam were 55-80 kg/ha. The flood plain in Xe Bangfai is under rainy seasonal paddy from June-October, with much shorter flooding duration compared to flood plains in Cambodia and Vietnam. It is estimated that the fish yield would be about 20 kg/ha, resulting in the value of 6 US\$/ha.

## **2.7 Aquaculture**

The level of aquaculture activity in the Xe Bangfai is low, with less than 3% of households involved. Backyard ponds, rice field fish culture, and village swamp fish culture are the most important types of fish culture. Net cages are least important. No production estimates are available for aquaculture activity in the Project area.

One reason for the low level of aquaculture might be the relative abundance of fish within the river and adjacent wetlands. Lack of infrastructure and well-developed market systems or transport services are other valid explanations, as well as lack of knowledge about fish culturing techniques. However, aquaculture is becoming more common in the lower Xe Bangfai zone, in part due to population pressure and in part due to availability of irrigation waters which are also used in aquaculture.

Natural and man-made fish ponds are stocked in the late spring and early summer for harvests 9-10 months later. The yields vary from 0.5 ton/ha for 6,000 ha of natural ponds and 1.2 ton/ha for 3,000 ha of man-made ponds. During a field mission in 2009, a fishpond farm was visited exploiting 6 ponds of 10 by 4m. A net return on investment of 100 USD/month was estimated.

## **2.8 Livestock and animal husbandry**

In many villages, livestock is a major source of income. Water buffaloes, cows and pigs act as de facto 'banks' for many families; animals are raised and can be sold for cash during times of particular need, such as during rice shortages or illness of a family member, or to pay the costs of wedding and funeral ceremonies.

Livestock are frequently to be found along, and in, the rivers of the basin. Along the Xe Bangfai River, pigs forage for worms along the riverbanks, water buffaloes wallow in the river and eat large amounts of algae and other water plants, ducks swim and feed in the river, and chickens, goats and cows drink from the river and forage vegetation along its banks. These 'free' services provided by the Xe Bangfai reduce the amount of resources

---

<sup>3</sup> See Annex 2 of the Stage-1 Report for detailed analysis of the focal group discussions

<sup>4</sup> MRC-Technical Paper, No:16, October 2007:Consumption and the yield of fish and other aquatic animals from the Lower Mekong Basin

that the owners of livestock would otherwise need to provide to these animals, reducing people's workloads and making the raising of livestock an efficient economic activity.

In the Lower Xe Bangfai area every household has on average 1 - 2 head of cattle, 0 - 1 pig and some 10 chicken. Buffalo's are still an important source of draft power for land preparation, although power tillers are becoming more common, particularly in the larger and more prosperous villages.

### **3 FUTURE AGRICULTURAL DEVELOPMENT**

The proposed project is provision of dyke system and flood control structures for (i) the area of Nongbok district by right bank embankment of the Xe Bangfai river and; (ii) part of Xaibouly district by left bank embankment of the Xe bangfai river. Irrigation development in the project area could be seen as independent activities, there would be a little link between flood protection measures and irrigation in dry season. Future agricultural development is investigating potential increase cultivated crop area and/or land use change due to the project in a case of (i) flood protection measures; and (ii) flood protection combined with irrigation development.

#### **3.1 Crops and crop calendar**

##### *3.1.1 Staple rice*

Actually, the main rice season is rain fed, seeded in June and transplanted in July. It is harvested in October or November, depending on the lasting of the raining season. Due to the long raining season, and as harvesting of a majority of the crops are to take place in dry periods, a combination of 2 crops will for sure be possible with additional irrigation.

As mentioned earlier in this report, the first priority of the local farmers is to provide enough rice to their household. As such and as already expressed by the local farmers in public participation sessions, they want to carry on cropping common rice for household consumption in the flood-protected area. This is based on their experiences of farming in a flood prone area and it is part of their risk management strategies. After having secured food, the farmers will consider growing a second crop to generate cash.

At a later stage, when the farmers consider that rice as staple crop can be secured on smaller land surface or by buying it on the market, larger areas for cash crop production will become available.

The farmer's choice to grow a second particular crop will depend on a series of different parameters:

1. The proposed cash production must be more productive than the usual sticky rice, in relation to the local limiting factor: labour. The farmer expects a higher earning per working day.
2. The market of that particular crop must be secured.
3. The higher return on investment will have to be demonstrated
4. The required investments must remain within his resources and land exploitation capacities.



5. The farmers must have acquired knowledge for growing that particular crop
6. The farmer must have the required capacities to crop and many other parameters that only local farmers perceive as important based on their situation, experience and collective history.

Based on the existing agricultural experience in Laos a number of crops can be envisaged. In terms of tons of agricultural production, the top 5 crops in Laos in order of importance are rice, vegetables and beans, sugarcane, starchy roots, and tobacco.

Since 1990, among these 5 leading crops, production of vegetables and beans has grown the fastest in percentage terms, followed by sugarcane. In the decade since 1990 rice production has increased 47.9 percent. Among agricultural products often produced as cash crops are mung-beans, soybeans, peanuts, tobacco, cotton, sugarcane.

This chapter resumes some crops that might have market option in the Lower Xe Bangfai project area. Commercial rice, long cotton and sugarcane have been identified as potential cash crop. The choice was made on the consultant's perception of possible market development, and on the existing Laotian cropping experience.

Considering the efforts of the World Health Organisation to control tobacco, (WHO Framework Convention on Tobacco Control FCTC), intensively growing tobacco in the Lower Xe Bangfai area was not considered as an option in this assessment, even if it was raised during the Public Participation activities, and even if marketing opportunities exist in Savannakhet.

The cropping calendar in **Error! Reference source not found.** provides an overview of the possible cropping combinations with the rainy seasonal paddy rice grown from July till November.

### 3.1.2 Commercial rice

Cropping a commercial rice variety would take advantage of growing demand for rice to supply inputs for noodle production and brewing. A pilot programme has been launched in the Khammounane province to promote the cultivation of polished rice, following a study showing that the demand for high-quality products remains high.

Also called "Polished rice", commercial rice attracts a higher price compared to sticky rice, of which the country currently has a surplus. However, not more than 20 percent of commercial rice used in Lao factories is produced by local farmers while the rest is imported<sup>5</sup>.

In order to open up and create market for these commercial rice, the coordinated chain between farmers, rice purchasing agencies and financial institutions is to be strengthened. Development of contract farming would as such be endeavoured.

During local field visits (July 2009), local farmers have expressed an interest in growing these commercial rice strains, because the study showed that growing commercial rice brings considerably more profit.

---

<sup>5</sup> Study done by Provincial Agriculture and Forestry Department and SNV (Netherlands Development Organisation)

### 3.1.3 *Sugarcane*

A market opportunity for extensively produced sugarcane exist since Khone Kaen Sugar Industry public Ltd , Thailand's fifth largest sugar manufacturer, plans to invest up to 300 million baht (about 86,000 US\$) to establish an ethanol production plant in Laos, expanding its investment in the country. The plant, scheduled to begin production in Savannakhet in 2010, is the second phase of the investment in Laos for Khon Kaen Sugar Industry Plc (KSL).

A joint-venture agreement was signed with Ban Pong Inter-trade Ltd (BPI) and the Laotian government to develop a 10,000 Ha sugarcane plantation and sugar mill in Savannakhet province. KSL and BPI agreed to establish the Savannakhet Sugar Corporation to execute the project, which is worth around US\$ 11 million US\$. The company plans to produce 600,000 tonnes of sugarcane over the next four years, but additional sugarcane for KSL's mill will come from other Laotian plantations, operated by firms including Mitr Phol Co, Thailand's largest sugar business, which two years ago invested US\$22 million in a 6,000 ha plantation. KSL will export most of its Laotian output to the EU with some going to local clients, he added.

In Vientiane Municipally, sugarcane is mainly supplied to PakSap Sugar Factory. This is a small factory, but their demand for sugar cane carry on rising. They are still under their maximum processing limit. National wise, the government of Lao imports the sugar from Thailand. This means that, next to the huge KSL ethanol project, the national market for sugar remains an option.

The waste from sugarcane, bagasse, has also the potential to feed the energy production sector using biomass. (Bouatthep Malaykham, Ministry of Energy and Mines, Department of Electricity, Brief Report of Biomass in LAO PDR)

### 3.1.4 *Cotton*

Cotton is most commonly found as an intercrop in Lao, with several hundred square metres of cultivation being sufficient to satisfy the weaving needs of one household. Local cotton varieties yield 200 - 800 kg of seed cotton/ha and have ginning outturns of between 20 and 33%. The short coarse fibres provide a rough-textured cloth for everyday use.

In the south of Lao, farmers sow cotton as an off-season flood-plain crop. Where lowland rice is the major crop, the most common association is groundnut–cotton in order to have a smooth work schedule for farmers. It is not common practice to use organic fertilisers or to apply pest control for cropping cotton in Lao.

Long fibre cotton has higher economical value that the local short fibre strains. Of all varieties tested in Lao, only S 295 and SRI F4 (cultivated in Chad) and G 31 9-1 6 (Côte d'Ivoire) adapt well to Laotian ecosystems. But the Indian cotton variety G. Hirsutum (known as Kham Khao 1 in Laos) - which is extremely hairy and behaves very well in the field-offers the best results (about 2,500 kg/ha of seed-cotton with intensive crop protection).

Laos has the possibility of opening its rather restrictive national market towards Thailand, and perhaps Vietnam, on condition that it develops production of the medium long fibre varieties demanded by cotton manufacturers. To illustrate the potential in these outlets, Thailand processed 377,000 tonnes of lint, including almost 90% imported fibre, in 1991, while Vietnam, consumes 70,000 tonnes of lint annually.

The current socioeconomic climate is favourable for the expansion of cotton cultivation. National and international markets appears to exist and farmers appear to be receptive.

A national coordination of the production appears to be essential to coordinate production input procurement, and purchase of smallholders' harvests. A rural cotton research base and a ginning unit presently exist in Savannakhet

Aiming at the establishment of a sustainable cotton sector, a fair-trade approach might be considered, respecting labour and environment. The international "fare-trade" market is growing.

### 3.1.5 Crop calendar

Most annual crops are planting during the rainy season, starting from June, and harvesting in dry season. Vegetables are mainly cultivated after rainy season and/or flood recession period taking advantage of soil moisture after the wet season. See Table 3.1.

**Table 3.1 Possible farming calendar for the Lower Xe Bangfai area**

	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.	Jan.	Feb.	Mar.	Apr.	May
	6	7	8	9	10	11	12	1	2	3	4	5
<b>INTENSIVE CASH CROP</b>												
Rainy Seasonal Paddy rice												
Dry season irrigated paddy rice												
Suger cane												
Rainy season cotton												
Dry season cotton												
<b>CROP FOR PERSONNAL CONSUMPTION or SMALL CASH</b>												
Onion												
Green Onion												
Chilly												
Corn												
Dry seasonal tobacco												
Groundnut												

## 3.2 Future without project

Promoting new crops requires sound thinking and progressive research in on-farm conditions. A new crop cannot be a sustainable answer, especially in term of risks for farmers, but must be considered into existing farming systems, always mixed between many plants and animals productions. Introducing a new cropping system is not obvious. It is possible only if the farmers take it over. However, the local farmers are risk averting and presently not ready to reduce their staple food cropping, which is wet season rice. Presently, farmers perceive a land-use change as taking risks.

In the project area, there exist several small scale irrigation schemes. Future without project, some irrigation scheme may be improved to increase irrigated area. However, it is assumed that the area increased by new developments would counter balance the existing irrigation scheme deteriorated. Therefore, it is expected that future irrigated area would be the same as current irrigated one.

Future agricultural land use in case of without project would be the same as current land use.

### 3.3 Future with flood protection project

It is expected that the proposed project would remove (i) annual flood damage to agriculture; (ii) flooding constrains on agricultural development in the area. It has a potential for expansion of cultivated area in the wet season and/or replacing short-duration crops by longer-duration ones which generate more benefit.

Under full flood protection for crops, it would be possible to change annual crops (rice, and non-rice crops into perennial crops such as sugarcane if it is more profitable.

Financial and economic net benefit of crops presented in section 2-5 showed that commercial rice has high return compared to other crops in the same cultivated conditions (rain-fed and/or irrigated). Expansion of commercial rice cultivation in the project area would not depend on flood protection measures, but depend on market and production contract between farmer and business. Replacing the rice by sugarcane is not economically justified, since the net benefit from rice (cultivated in wet season) is higher than that from sugarcane (cultivated through the year-round).

In general, flood protection measures can remove the potential flood damages but can not increase cultivated crop area neither in the dry season nor in the wet season, since it is currently full crop cultivation already in the wet season. It is therefore, agricultural land use in future with flood protection would likely be the same as the agricultural land use in future without project.

### 3.4 Future with flood protection and irrigation project

As mentioned above, irrigation schemes has been developed for Xaybouly district. There are some small irrigation schemes in Nongbok with irrigated area of 1,880ha out of 10,355ha. The potential crop cultivation with new irrigation schemes would increase dry irrigated crop from existing low level to full level of 10,355ha. Other non-rice crops such as vegetables, corn, beans etc are assumed to be the same as future without project. The cropping intensity in Nongbok district would be increased from 96% to 157%.

In short, future agriculture land use in Nongbok district under flood control and irrigation development would mainly change dry season rice from 1,880ha to 10,535ha. See **Error! Reference source not found.**

**Table 3.2 Future agricultural land use**

Items	Future Without Project		Future With Project	
	Nongbok	Xaybouly	Nongbok	Xaybouly
<b>Gross area</b>	<b>31,300</b>	<b>NA</b>	<b>31,300</b>	<b>NA</b>
<b>Non-agricultural land</b>	<b>17,150</b>	<b>NA</b>	<b>17,150</b>	<b>NA</b>
<b>Agricultural land</b>	<b>14,150</b>	<b>14,500</b>	<b>14,150</b>	<b>14,500</b>
<b>Cultivated crop area</b>	<b>13,794</b>	<b>23,934</b>	<b>13,794</b>	<b>23,934</b>
<b>Cropping intensity</b>	<b>97%</b>	<b>165%</b>	<b>157%</b>	<b>165%</b>
<b>I Wet season cultivated land</b>	<b>10,684</b>	<b>11,772</b>	<b>10,684</b>	<b>11,772</b>
<b>A. Cultivated rice</b>	<b>10,535</b>	<b>8,617</b>	<b>10,535</b>	<b>8,617</b>
1. Staple Rice	5,268	8,617	5,268	8,617
2. Commercial rice	5,267	-	5,267	-
<b>B. Cultivated non-rice</b>	<b>149</b>	<b>3,155</b>	<b>149</b>	<b>3,155</b>
1. Chilly	-	9	-	9
2. Sweet corn	149	80	149	80
3. Sugarcane	-	2,884	-	2,884
4. Other crops	-	182	-	182
<b>II Dry season cultivated land</b>	<b>3,110</b>	<b>12,162</b>	<b>3,110</b>	<b>12,162</b>
<b>A. Cultivated rice</b>	<b>1,880</b>	<b>8,520</b>	<b>10,535</b>	<b>8,520</b>
1. Staple Rice	-	-	-	-
2. Commercial rice	1,880	8,520	10,535	8,520
<b>B. Cultivated non-rice</b>	<b>1,230</b>	<b>3,642</b>	<b>1,230</b>	<b>3,642</b>
1. Tobacco	35	112	35	112
2. Chilly	170	63	170	63
3. Sweet corn	53	94	53	94
4. Sugarcane	-	2,884	-	2,884
5. Other crops	746	489	746	489

Source: Consultant estimates

## 4 EXPECTED AGRICULTURAL NET BENEFITS

### 4.1 Future with flood protection measures

There would be no incremental net benefit from crop cultivation due to the proposed project.

### 4.2 Future with flood protection and irrigation development

#### 4.2.1 Nongbok district

With provision of irrigation facilities in Nongbok district, it would bring dry irrigated rice from 1,880ha to 10,535ha for commercial rice. Economic net benefit of irrigated commercial rice would be 936 US\$/ha, resulting in incremental net benefit of 8.1 million US\$/year.

#### 4.2.2 Xaybouly district

Since the area is under irrigation, there would be no new irrigation development and therefore it is expected that incremental net benefit would be zero.

## Attachment 1

### Summary of crop benefits

No	Crops	Production (kg)	Revenue Kip	Total Inputs Kip	Physical input Kip	Financial NB Kip	Economic NB Kip
1	Wet Rice	4,300	6,450,000	4,382,661	1,896,451	2,067,339	3,261,794
2	Dry_Rice (irrigated)	6,200	9,300,000	6,129,261	3,536,451	3,170,739	4,285,394
3	Wet_Cotton	1,500	5,250,000	2,378,331	1,514,451	2,871,669	3,457,194
4	Dry_Cotton	800	2,800,000	1,515,681	954,451	1,284,319	1,630,194
5	Wet_Commercial rice	4,500	9,000,000	4,323,021	1,840,451	4,676,979	5,862,194
6	Dry_commercial rice (irrigated)	6,500	13,000,000	6,171,861	3,576,451	6,828,139	7,953,394
7	Rainfed_Sugarcane	45,000	6,750,000	4,644,651	2,892,451	2,105,349	3,254,794
8	Irrigated_Sugarcane	65,000	9,750,000	5,496,651	3,692,451	4,253,349	5,094,794
9	Irrigated_Corn	8,000	8,000,000	4,465,731	2,724,451	3,534,269	4,439,194
10	Rainfed_Corn	5,000	5,000,000	4,039,731	2,324,451	960,269	2,019,194

No	Crops	Production (kg)	Revenue US\$	Total Inputs US\$	Physical input US\$	Financial NB US\$	Economic NB US\$
1	Wet Rice	4,300	759	516	223	243	384
2	Dry_Rice (irrigated)	6,200	1,094	721	416	373	504
3	Wet_Cotton	1,500	618	280	178	338	407
4	Dry_Cotton	800	329	178	112	151	192
5	Wet_Commercial rice	4,500	1,059	509	217	550	690
6	Dry_commercial rice (irrigated)	6,500	1,529	726	421	803	936
7	Rainfed_Sugarcane	45,000	794	546	340	248	383
8	Irrigated_Sugarcane	65,000	1,147	647	434	500	599
9	Irrigated_Corn	8,000	941	525	321	416	522
10	Rainfed_Corn	5,000	588	475	273	113	238

## Attachment 2-1

### Financial crop-budget (wet season staple rice)

1 US \$ = 8,500 KIP

		Yield /ha	Selling price KIP /kg	revenue KIP /ha
<b>1 Gross income</b>	seeds (kg)	4,300	1,500	<b>6,450,000</b>

		Input amount /ha	Cost price KIP /unit	revenue KIP /ha
<b>2 Input</b>	Seeds (kg)	80	5,600	448,000
	Salaried Labour (ploughing, harrowing, weeding, harvesting) (days)	90	25,000	2,250,000
	Fertilizers (kg)	200	4,500	900,000
	Insecticides (kg)	1	36,000	36,000
	Irrigation electricity (lumpsum)	n/a		0
	Irrigation maintenance cost (lumpsum)	n/a		0
	<b>TOTAL</b>			<b>3,634,000</b>

		Purchase price KIP	depreciation time years	Capital cost per year
<b>3 Equipment</b>	Purchase of Equipment (Hand tractor and accessories)	16,000,000	5	<b>202,334</b>
	Fuel (KIP/ha)	300,000	n/a	<b>300,000</b>
	Equipment maintenance cost (5% per year)	n/a	n/a	<b>10,117</b>

		Loan required capital	Interest rate % per year	Credit cost KIP /ha
<b>4 Credit</b>	6 month loan for input	3,634,000	13	236,210
	loan for equipment			
	<b>TOTAL</b>			<b>236,210</b>

<b>5 Net margin (1-2-3-4)</b>		KIP/ha	<b>2,067,339</b>
		Financial NB (US \$/ha)	243
		Economic NB (US \$/ha)	384

## Attachment 2-2

### Financial crop-budget (dry season staple rice irrigated)

1 US \$ = 8,500 KIP

		Yield /ha	Selling price KIP /kg	revenue KIP /ha
<b>1 Gross income</b>	seeds (kg)	6,200	1,500	<b>9,300,000</b>

		Input amount /ha	Cost price KIP /unit	revenue KIP /ha
<b>2 Input</b>	Seeds (kg)	70	5,600	392,000
	Salaried Labour (ploughing, harrowing, weeding, harvesting) (days)	90	25,000	2,250,000
	Fertilizers (kg)	400	4,400	1,760,000
	Insecticides (kg)	2	36,000	72,000
	Irrigation electricity (lumpsum)	1	400,000	400,000
	Irrigation maintenance cost (lumpsum)	1	400,000	400,000
	<b>TOTAL</b>			<b>5,274,000</b>

		Purchase price KIP	depreciation time years	Capital cost per year
<b>3 Equipment</b>	Purchase of Equipment (Hand tractor and accessories)	16,000,000	5	<b>202,334</b>
	Fuel (KIP/ha)	300,000	n/a	<b>300,000</b>
	Equipment maintenance cost (5% per year)	n/a	n/a	<b>10,117</b>

		Loan required capital	Interest rate % per year	Credit cost KIP /ha
<b>4 Credit</b>	6 month loan for input	5,274,000	13	342,810
	loan for equipment			
	<b>TOTAL</b>			<b>342,810</b>

<b>5 Net margin (1-2-3-4)</b>		KIP /ha	<b>3,170,739</b>
	Financial NB (US \$/ha)		373
	Economic NB (US \$/ha)		504



## Attachment 2-3

### Financial crop-budget (long fibre cotton rainfed)

long fibre cotton are cotton flowers producing fibres of 27 - 30 mm, such as Kham Khao 1 (Indian cotton)

The economic study considers 1 crop during dry season

1 US \$ = 8,500 KIP

		Yield /ha	Selling price KIP /kg cottonseeds	revenue KIP /ha
<b>1 Gross income</b>	<i>Cottonseeds (kg)</i>	1,500	3,500	<b>5,250,000</b>

		Input amount /ha	Cost price KIP /unit	revenue KIP /ha
<b>2 Input</b>	<i>Seeds (kg)</i>	25	2,000	50,000
	<i>Salaried Labour (ploughing, harrowing, weeding, harvesting) (days)</i>	30	25,000	750,000
	<i>Fertilizers (kg)</i>	200	4,400	880,000
	<i>Insecticides (kg)</i>	2	36,000	72,000
	<i>Irrigation electricity (lumpsum)</i>	n/a		0
	<i>Irrigation maintenance cost (lumpsum)</i>	n/a		0
	<b>TOTAL</b>			<b>1,752,000</b>

		Purchase price KIP	depreciation time years	Capital cost per year
<b>3 Equipment</b>	<i>Purchase of Equipment (Hand tractor and accessories)</i>	16,000,000	5	<b>202,334</b>
	<i>Fuel (KIP/ha)</i>	300,000	n/a	<b>300,000</b>
	<i>Equipment maintenance cost (5% per year)</i>	n/a	n/a	<b>10,117</b>

		Loan required capital	Interest rate % per year	Credit cost KIP /ha
<b>4 Credit</b>	<i>6 month loan for input</i>	1,752,000	13	113,880
	<i>loan for equipment</i>			
	<b>TOTAL</b>			<b>113,880</b>

<b>5 Net margin (1-2-3-4)</b>		KIP/ha	<b>2,871,669</b>
		Financial NB (US \$/ha)	338
		Economic NB (US \$/ha)	407

## Attachment 2-4

### Financial crop-budget (long fibre cotton\_Dry season no irrigation)

long fibre cotton are cotton flowers producing fibres of 27 - 30 mm, such as Kham Khao 1 (Indian cotton)

The economic study considers 1 crop during dry season

1 US \$ = 8,500 KIP

		Yield /ha	Selling price KIP /kg cottonseeds	revenue KIP /ha
<b>1 Gross income</b>	<i>Cottonseeds (kg)</i>	800	3,500	<b>2,800,000</b>

		Input amount /ha	Cost price KIP /unit	revenue KIP /ha
<b>2 Input</b>	<i>Seeds (kg)</i>	25	2,000	50,000
	<i>Salaried Labour (ploughing, harrowing, weeding, harvesting) (days)</i>	20	25,000	500,000
	<i>Fertilizers (kg)</i>	160	2,000	320,000
	<i>Insecticides (kg)</i>	2	36,000	72,000
	<i>Irrigation electricity (lumpsum)</i>	n/a		0
	<i>Irrigation maintenance cost (lumpsum)</i>	n/a		0
	<b>TOTAL</b>			<b>942,000</b>

		Purchase price KIP	depreciation time years	Capital cost per year
<b>3 Equipment</b>	<i>Purchase of Equipment (Hand tractor and accessories)</i>	16,000,000	5	<b>202,334</b>
	<i>Fuel (KIP/ha)</i>	300,000	n/a	<b>300,000</b>
	<i>Equipment maintenance cost (5% per year)</i>	n/a	n/a	<b>10,117</b>

		Loan required capital	Interest rate % per year	Credit cost KIP /ha
<b>4 Credit</b>	<i>6 month loan for input</i>	942,000	13	61,230
	<i>loan for equipment</i>			
	<b>TOTAL</b>			<b>61,230</b>

<b>5 Net margin (1-2-3-4)</b>		KIP/ha	<b>1,284,319</b>
		Financial NB (US \$/ha)	151
		Economic NB (US \$/ha)	192

## Attachment 2-5

### Financial crop-budget (Wet season commercial rice)

1 US \$ = 8,500 KIP

		Yield /ha	Selling price KIP /kg	revenue KIP /ha
<b>1 Gross income</b>	seeds (kg)	4,500	2,000	<b>9,000,000</b>

		Input amount /ha	Cost price KIP /unit	revenue KIP /ha
<b>2 Input</b>	Seeds (kg)	70	5,600	392,000
	Salaried Labour (ploughing, harrowing, weeding, harvesting) (days)	90	25,000	2,250,000
	Fertilizers (kg)	200	4,500	900,000
	Insecticides (kg)	1	36,000	36,000
	Irrigation electricity (lumpsum)	n/a		
	Irrigation maintenance cost (lumpsum)	n/a		0
	<b>TOTAL</b>			<b>3,578,000</b>

		Purchase price KIP	depreciation time years	Capital cost per year
<b>3 Equipment</b>	Purchase of Equipment (Hand tractor and accessories)	16,000,000	5	<b>202,334</b>
	Fuel (KIP/ha)	300,000	n/a	<b>300,000</b>
	Equipment maintenance cost (5% per year)	n/a	n/a	<b>10,117</b>

		Loan required capital	Interest rate % per year	Credit cost KIP /ha
<b>4 Credit</b>	6 month loan for input	3,578,000	13	232,570
	loan for equipment			
	<b>TOTAL</b>			<b>232,570</b>

<b>5 Net margin (1-2-3-4)</b>		KIP/ha	<b>4,676,979</b>
		Financial NB (US \$/ha)	550
		Economic NB (US \$/ha)	690

## Attachment 2-6

### Financial crop-budget (dry season commercial rice - irrigated)

1 US \$ =

8,500 KIP

		Yield /ha	Selling price KIP /kg	revenue KIP /ha
<b>1 Gross income</b>	seeds (kg)	6,500	2,000	<b>13,000,000</b>

		Input amount /ha	Cost price KIP /unit	revenue KIP /ha
<b>2 Input</b>	Seeds (kg)	70	5,600	392,000
	Salaried Labour (ploughing, harrowing, weeding, harvesting) (days)	90	25,000	2,250,000
	Fertilizers (kg)	400	4,500	1,800,000
	Insecticides (kg)	2	36,000	72,000
	Irrigation electricity (lumpsum)	n/a	400,000	400,000
	Irrigation maintenance cost (lumpsum)	n/a	400,000	400,000
	<b>TOTAL</b>			<b>5,314,000</b>

		Purchase price KIP	depreciation time years	Capital cost per year
<b>3 Equipment</b>	Purchase of Equipment (Hand tractor and accessories)	16,000,000	5	<b>202,334</b>
	Fuel (KIP/ha)	300,000	n/a	<b>300,000</b>
	Equipment maintenance cost (5% per year)	n/a	n/a	<b>10,117</b>

		Loan required capital	Interest rate % per year	Credit cost KIP /ha
<b>4 Credit</b>	6 month loan for input	5,314,000	13	345,410
	loan for equipment			
	<b>TOTAL</b>			<b>345,410</b>

<b>5 Net margin (1-2-3-4)</b>			KIP /ha	<b>6,828,139</b>
			Financial NB (US \$/ha)	803
			Economic NB (US \$/ha)	936

## Attachment 2-7

### Financial crop-budget (Rainfed Sugarcane)

1 US \$ =

8,500 KIP

		Yield /ha	Selling price KIP /kg	revenue KIP /ha
<b>1 Gross income</b>	<i>seeds (kg)</i>	45,000	150	<b>6,750,000</b>

		Input amount /ha	Cost price KIP /unit	revenue KIP /ha
<b>2 Input</b>	<i>Seeds (kg)</i>	4,000	200	800,000
	<i>Salaried Labour (ploughing, harrowing, weeding, harvesting) (days)</i>	60	25,000	1,500,000
	<i>Fertilizers (kg)</i>	200	4,400	880,000
	<i>Insecticides (kg)</i>	2	350,000	700,000
	<i>Irrigation electricity (lumpsum)</i>	n/a		0
	<i>Irrigation maintenance cost (lumpsum)</i>	n/a		0
	<b>TOTAL</b>			<b>3,880,000</b>

		Purchase price KIP	depreciation tim years	Capital cost per year
<b>3 Equipment</b>	<i>Purchase of Equipment (Hand tractor and accessories)</i>	16,000,000	5	<b>202,334</b>
	<i>Fuel (KIP/ha)</i>	300,000	n/a	<b>300,000</b>
	<i>Equipment maintenance cost (5% per year)</i>	n/a	n/a	<b>10,117</b>

		Loan required capital	Interest rate % per year	Credit cost KIP /ha
<b>4 Credit</b>	<i>6 month loan for input</i>	3,880,000	13	252,200
	<i>loan for equipment</i>			
	<b>TOTAL</b>			<b>252,200</b>

<b>5 Net margin (1-2-3-4)</b>		KIP /ha	<b>2,105,349</b>
	Financial NB (US \$/ha)		248
	Economic NB (US \$/ha)		383

## Attachment 2-8

### Financial crop-budget (Irrigated Sugarcane)

1 US \$ =

8,500 KIP

		Yield /ha	Selling price KIP /kg	revenue KIP /ha
<b>1 Gross income</b>	<i>seeds (kg)</i>	65,000	150	<b>9,750,000</b>

		Input amount /ha	Cost price KIP /unit	revenue KIP /ha
<b>2 Input</b>	<i>Seeds (kg)</i>	4,000	200	800,000
	<i>Salaried Labour (ploughing, harrowing, weeding, harvesting) (days)</i>	60	25,000	1,500,000
	<i>Fertilizers (kg)</i>	200	4,400	880,000
	<i>Insecticides (kg)</i>	2	350,000	700,000
	<i>Irrigation electricity (lumpsum)</i>	n/a	400,000	400,000
	<i>Irrigation maintenance cost (lumpsum)</i>	n/a	400,000	400,000
	<b>TOTAL</b>			<b>4,680,000</b>

		Purchase price KIP	depreciation tim years	Capital cost per year
<b>3 Equipment</b>	<i>Purchase of Equipment (Hand tractor and accessories)</i>	16,000,000	5	<b>202,334</b>
	<i>Fuel (KIP/ha)</i>	300,000	n/a	<b>300,000</b>
	<i>Equipment maintenance cost (5% per year)</i>	n/a	n/a	<b>10,117</b>

		Loan required capital	Interest rate % per year	Credit cost KIP /ha
<b>4 Credit</b>	<i>6 month loan for input</i>	4,680,000	13	304,200
	<i>loan for equipment</i>			
	<b>TOTAL</b>			<b>304,200</b>

<b>5 Net margin (1-2-3-4)</b>		KIP /ha	<b>4,253,349</b>
	Financial NB (US \$/ha)		500
	Economic NB (US \$/ha)		599

## Attachment 2-9

### Financial crop-budget (Irrigated Corn)

1 US \$ = 8,500 KIP

		Yield /ha	Selling price KIP /kg	revenue KIP /ha
<b>1 Gross income</b>	seeds (kg)	8,000	1,000	<b>8,000,000</b>

		Input amount /ha	Cost price KIP /unit	revenue KIP /ha
<b>2 Input</b>	Seeds (kg)	20	10,000	200,000
	Salaried Labour (ploughing, harrowing, weeding, harvesting) (days)	60	25,000	1,500,000
	Fertilizers (kg)	350	4,400	1,540,000
	Insecticides (kg)	2	36,000	72,000
	Irrigation electricity (lumpsum)	n/a	200,000	200,000
	Irrigation maintenance cost (lumpsum)	n/a	200,000	200,000
	<b>TOTAL</b>			<b>3,712,000</b>

		Purchase price KIP	depreciation time years	Capital cost per year
<b>3 Equipment</b>	Purchase of Equipment (Hand tractor and accessories)	16,000,000	5	<b>202,334</b>
	Fuel (KIP/ha)	300,000	n/a	<b>300,000</b>
	Equipment maintenance cost (5% per year)	n/a	n/a	<b>10,117</b>

		Loan required capital	Interest rate % per year	Credit cost KIP /ha
<b>4 Credit</b>	6 month loan for input	3,712,000	13	241,280
	loan for equipment			
	<b>TOTAL</b>			<b>241,280</b>

<b>5 Net margin (1-2-3-4)</b>		KIP /ha	<b>3,534,269</b>
	Financial NB (US \$/ha)		416
	Economic NB (US \$/ha)		522

## Attachment 2-10

### Financial crop-budget (Rainfed Corn)

1 US \$ = 8,500 KIP

		Yield /ha	Selling price KIP /kg	revenue KIP /ha
<b>1 Gross income</b>	seeds (kg)	5,000	1,000	<b>5,000,000</b>

		Input amount /ha	Cost price KIP /unit	revenue KIP /ha
<b>2 Input</b>	Seeds (kg)	20	10,000	200,000
	Salaried Labour (ploughing, harrowing, weeding, harvesting) (days)	60	25,000	1,500,000
	Fertilizers (kg)	350	4,400	1,540,000
	Insecticides (kg)	2	36,000	72,000
	Irrigation electricity (lumpsum)	n/a		0
	Irrigation maintenance cost (lumpsum)	n/a		0
<b>TOTAL</b>				<b>3,312,000</b>

		Purchase price KIP	depreciation time years	Capital cost per year
<b>3 Equipment</b>	Purchase of Equipment (Hand tractor and accessories)	16,000,000	5	<b>202,334</b>
	Fuel (KIP/ha)	300,000	n/a	<b>300,000</b>
	Equipment maintenance cost (5% per year)	n/a	n/a	<b>10,117</b>

		Loan required capital	Interest rate % per year	Credit cost KIP /ha
<b>4 Credit</b>	6 month loan for input	3,312,000	13	215,280
	loan for equipment			
<b>TOTAL</b>				<b>215,280</b>

<b>5 Net margin (1-2-3-4)</b>		KIP /ha	<b>960,269</b>
	Financial NB (US \$/ha)		113
	Economic NB (US \$/ha)		238



## Appendix 4 Public Participation Plan



## CONTENTS

	Page
1 INTRODUCTION	1
2 OBJECTIVE OF PUBLIC PARTICIPATION IN COMPONENT 2	1
3 PRELIMINARY STAKEHOLDER CONSULTATION	2
3.1 Specific Purpose of preliminary exploratory stakeholders' consultations	2
3.2 Se Bangfai, Lao PDR	3
3.2.1 Stakeholders consulted in Se Bang Fai, Laos PDR	3
3.2.2 Highlights of Stakeholder Consultation in Se Bang Fai	4
4 PUBLIC PARTICIPATION PROCESS SUMMARY	6

## LIST OF APPENDIXES

**Appendix 1: Public Participation Plan for Structural Flood Protection Measures**

**Appendix 2: Stakeholder Consultation**



## 1 INTRODUCTION

The MRC is aware that stakeholder involvement in decision-making is fundamental to achieving feasible, equitable and lasting solutions in water management and that the quality of decisions can be improved by the inclusion of a broad range of stakeholders who can bring important local knowledge and relevant perspectives to the process<sup>1</sup>. The MRC further recognizes both internal stakeholders (Government bodies in MRC structure such as MRC Council, Joint Committees, NMCs and Line agencies in each country) and external stakeholders (non-state bodies such as NGOs, implementing partners, civil society organizations, policy advocates, media or any other who have stake to lose or gain). MRC emphasizes that for the participation to be genuine, all relevant stakeholders should have an opportunity to directly or indirectly influence project design, implementation and effects. Participation should be also inclusive of women, elderly, young people and minority groups.

Information on the benefits of public participation, forms of public participation and how they need to be facilitated at various stages is already available in the MRC system.

The FMMP-C2 Stage 1 Evaluation Report provides an outline of the need for public participation in the demonstration projects based on the public participation principles recognized at MRC.

In Stage 2 of FMMP-C2, five demonstration project areas have been selected for e.g. planning structural measures for flood protection or flood risk assessment. Apart from reducing the risk of damage to houses, property, and creating better living conditions for the people, they will bring economic benefits to the people mainly through better land use and agriculture. A concrete public participation plan is crucial to ensure that the needs of community and stakeholders supporting the community are incorporated in the design of the demonstration project and support systems are put in place to adapt to these changes.

## 2 OBJECTIVE OF PUBLIC PARTICIPATION IN COMPONENT 2

The objectives of Public Participation Strategy in stage 2 planning of the structural flood protection measures demonstration project are to:

1. Develop Public Participation Plan for the structural flood protection measures demonstration projects to ensure inputs from stakeholders are incorporated in the design and that any potential negative impact on stakeholders is minimized;
2. Prepare Best Practice Guidelines to help the facilitators in conducting Public consultation exercises;
3. Training of NMC and Line Agencies in facilitating public participation during the implementation of the demonstration project.

---

<sup>1</sup> MRC – Public Participation in Lower Mekong Basin

### 3 PRELIMINARY STAKEHOLDER CONSULTATION

The Lower Mekong Basin Development Plan has defined broad groups of key stakeholders. In conducting a preliminary stakeholders' analysis in February and March 2009 by the Public Participation Specialist, the list of stakeholders defined by the BDP was used. From this list, the MRC, NMC, Water Resources Department, Agriculture Department, and fisheries administration are identified as the key internal stakeholders. Community groups, Water User's Association, Commune committees and Civil Society Organizations such as NGOs are identified as key external stakeholders.

This list provided a basis for conducting a preliminary consultation with these stakeholders to understand the issues that are important for different stakeholders in the Se Bang Fai Demonstration project area in Lao PDR. Appendix 3 provides the detailed schedule implemented during this mission

#### 3.1 Specific Purpose of preliminary exploratory stakeholders' consultations

1. Assess existing participatory processes in place;
2. Identify stakeholders that should be engaged at various stages of the project planning and implementation;
3. Understand the type of public participation activities that would be feasible;
4. Gather information at community level on the problems due to flooding and to understand the need for integrating support systems to capitalize on the benefits of structural flood protection measures;
5. Get a preliminary feedback on the proposed structural measures for flood protection.

Appendix 2 highlights the summary of consultations with the key stakeholders. The key highlights are related to problems due to flooding in the two areas, present livelihoods options, any existing structural flood protection measures and the extent of public participation and a preliminary feedback on the demonstration project ideas.

In Se Bang Fai, the preliminary consultations were conducted together with National the Consultant's Social Sector Specialist, and Provincial and District Social Welfare Council representative with the permission from LNMC coordinators as they were not available to join during the period of these visits.


Since this was a preliminary consultation, the stakeholder groups were consulted individually to gain in-depth understanding of the problems, issues and opportunities. The consultation process involved first understanding the existing situation with floods, coping mechanisms, community profile, vulnerability analysis, existing agriculture and fisheries practices and sharing the FMMP-C2 structural measures project design and objective to get a preliminary feedback.

The information gathered from these consultations will help in preparing the best practice guidelines for public participation and developing a training plan for the NMC, Line agencies and Civil Society Organizations who would potentially be involved in conducting or facilitating the actual consultations.

### 3.2 Se Bangfai, Lao PDR

The project area refers primarily to the flood prone area of the Se Bang Fai downstream of the crossing with the National Road Nr 13. The location of the area is shown in the following figure:

The development of Se Bang Fai irrigation schemes may go beyond the flood prone areas. These areas are to be included in the overall evaluation of the water resources development and management in the Lower Se Bang Fai. For the evaluation of flood protection schemes, though, these areas are not taken into account.

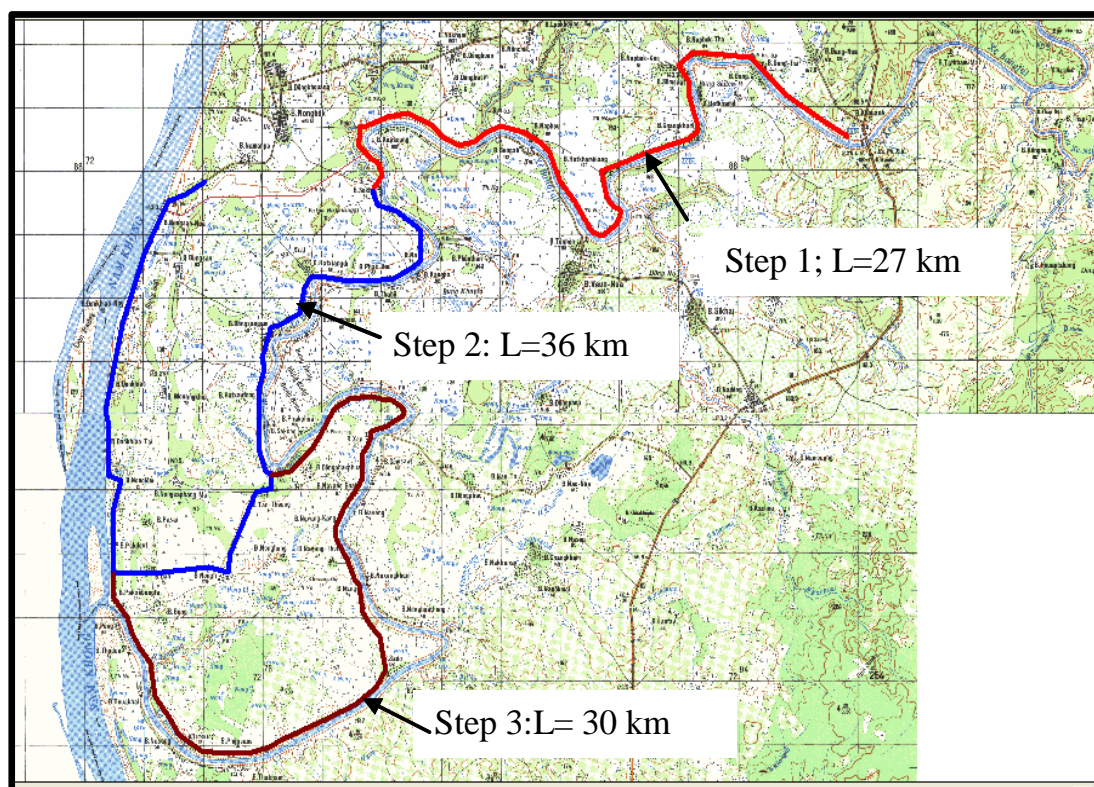

#### 3.2.1 Stakeholders consulted in Se Bang Fai, Laos PDR

1. Stakeholders' consulted in a group at LNMC
  - a. Department of Irrigation
  - b. Department of hydrology & Meteorology
  - c. Department of Water Resources
  - d. National Disaster Management Organization
  - e. LNMC
  - f. Department of Land use
  - g. Water Resource and Environment Research Institute (Newly formed)
  - h. Department of water ways
  - i. National Disaster Management Committee
2. Social Welfare Council, Takhekh and Nongbok
3. Community at Sok boe and Hatsai Phong village
4. Water user association vice chief at Tan Theung village

### 3.2.2 Highlights of Stakeholder Consultation in Se Bang Fai

#### Problem due to flooding

The flood in this area come quickly and lasts for a short period of about 30 to 45 days. Since it's more of a combined flood, the damage to properties and assets are considerable. It also impacts the water quality causing health problems. The main damage to the crop is to wet season paddy.

#### Existing Structures

- Dikes and flood water control gates can be seen at many places along the Se Bang Fai River. The Government is already investing in these infrastructure as and when resource are mobilized;



- Pumping stations and irrigation channels can be seen along Se Bang Fai;



- Dry season rice crop is grown with irrigation;





### Feedback on Demonstration Project

- Farmer groups, SWC, Dept. of water resources and land use all see the benefit of the project.
- Flood protection measures in this area will help in growing the wet season rice. Farmers will likely allocate more area under rice during the flood season when flood protection measures are implemented as the cost of cultivation is low. It is expensive to cultivate dry season rice and the farmers don't earn more than \$ 100/ha. Farmers are likely to reduce area under dry season rice after the project is implemented. It costs \$ 400 to cultivate dry season rice, which includes cost of seed, transplanting, other labour, fertilizer and pest management. In addition to this, farmers pay \$ 60 as electricity fee (which includes tax) to the commune for maintaining the irrigation pumping stations
- People in this area hate flood as they are for short period and destroys their crops, livestock, houses and other assets.
- Fishing doesn't seem to be a big issue in this area
- The project ideas as preliminary developed by the consultant during Stage 1 of FMMP-C2, are in line with the design submitted by the SWC to the Laos PDR Govt.

### Issues to consider

- Damage to property and assets is high
- Male farmers prefer to save crops rather than houses and assets. Women would like to save the houses and assets as well, but will go with the decision made by the men considering they are head of family. Men prefer to have the dike after the village and not before the village. The reason is that if the dike is constructed before the village and if it breaches, it will destroy their houses. Dikes after the village will cause flood in the village, but water flow can be controlled and damage to houses and assets will be minimal. The women are worried about loss to paddy storage.
- Area under rice might reduce in the dry season after the project is implemented as farmers are likely to cultivate more wet season rice
- Dry season rice more expensive to cultivate
- Land holding is small. Less than 1 ha for majority of the farmers, which needs additional organization of farmers to create market linkages
- Existing pumping stations and irrigation system all along the Se Bang Fai in Nongbok district.
- Existing plan of the Government to construct flood protection structures. Many dikes have been planned
- Operation & Maintenance of structures considering the present experience with pumping station and irrigation schemes.

## 4 PUBLIC PARTICIPATION PROCESS SUMMARY

The preliminary consultation has given an opportunity to highlight issues that will be important to consider for designing the demonstration project. Some of the issues are already known, but there may be issues which have not been considered. At this stage, there are assumptions as to the needs of the communities and perceptions about various stakeholders in supporting or opposing this project.

A broader consultation with key stakeholders in the area will provide inputs for the design of the project as well as highlight what resources each stakeholder can bring into this project at various stages.

As has been highlighted before, the needs of the communities and within the community for men and women vary considerably. This cannot be known unless a proper stakeholder analysis is done in participation with the communities. Similarly, the internal and external stakeholders can contribute considerably in integrating agriculture, fisheries and environment impact of the project. Facilitating to gather these inputs constructively can lead to the contribution of this input into the project preparation.

Participation can range from simply informing people about the project, wherein people or stakeholders have no opportunity to influence the decision making, upto empowerment of stakeholders in the design and implementation of the structural measure, wherein people and stake holders have an opportunity to influence the decision making. Various types of public participation between these two extremes can be consultations, participation and creating ownership. The level of participation desired should be clearly defined before starting the consultation process. The tools and methods adopted are different for these different types of participatory process.

Empowering the community and stakeholders in joint decision making is the ideal participation process. More often than not the facilitators end up simply informing the people and stakeholders about the project and conduct consultation exercise that may not give enough room for decision making by the people and stakeholders. This can have serious consequences when the project is at implementation stage. Hence, training the facilitators in appropriate training tools and methods to undertake public participation process, which is inclusive and empowers or at least creates ownership opportunities for influencing the decision making process becomes crucial.

The next step is how to integrate the inputs from consultation into design changes or adding elements to the design. Multi-stakeholders facilitation skills can be important for this process.

The Best Practice Guideline on Public Participation and Training materials will provide the required tools and methods to conduct these exercises effectively.

The public participation process is described in detail in Appendix 1. The following is the summary of public participation process envisaged for Stage 2 and project implementation stage

### Project Conceptualization Stage – Demonstration phase FMMP-C2

The public participation specialist will train the NMC, Line Agencies, Social Sector Specialist and Project Consultant Engineers by equipping them with the right tools and

skills to conduct public consultation exercises. A Best Practice Guidelines will be prepared to help the facilitators in conducting the public consultation. The following is the summary of steps that will be followed in stage 2

- Prepare Fact Sheets describing the project, area covered, intended benefits, potential impacts in local language to be used to inform and educate the communities as well as line agencies and NGOs
- Facilitate consultation sessions at community level to identify vulnerable groups and issues important for women, agriculture and fisheries. These sessions should be facilitated by local external facilitator and separately with women by women facilitators
- Facilitate consultation sessions with Line agencies and NGOs separately. This will be done by trained facilitators at NMC or Line agencies.
- Conduct multi-stakeholder workshop with representatives from farmer groups, communes, district and provincial level line agencies and representatives from ministries
- The outputs of these consultations will be used by the project design team to incorporate the needs and wishes of the community and stakeholders in the design.

#### Project Design Stage

- Identify NMC and key staff of project executing agency and also NGOs to lead consultation session on structural design
- Train the facilitators in participatory tools (land use mapping, resource mapping, seasonality, timelines and visioning) after conducting training needs assessment of these facilitators
- Conduct focus group interviews of all stakeholders explaining the detailed project at local level to understand how to mitigate the negative impacts, if still any after incorporating the wishes and needs of community. Identify contentious issues that needs to be resolved further by negotiation and bring to the multi-stakeholders platform
- Conduct multi-stakeholder workshop to incorporate the needs and wishes of the communities and other stakeholders and communicate the final project design

#### Project Execution Stage

- Communicate the project design, launch and progress made during the implementation through mass media
- Communicate the project design to executing agency staff at various level
- Conduct sessions at community level to identify participation in the construction of the structural flood control measures.
- Train the community in operation and maintenance and create user groups for efficient management and use of structures

## Appendix 1: Public Participation Plan for Structural Flood Protection Measures

### Stakeholder Groups

<p><i>Involved in project preparation exercise:</i>                  Project implementing agency                  National and provincial line agencies                  Contractors                  Provincial governments</p>	<p><i>For consultation:</i>                  Local governments (province, district, commune)                  Village leaders, village members                  Community-based organizations (Farmers' groups, Water-User Groups, Conservation / Forest User Groups)                  Civil society organizations or mass organizations (eg. Women's Union)</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Project type	Structural Flood Protection Measures		
Stages	Activities	Events	Resource required
<b>During Stage 2: Demonstration Phase</b>			
<p>Project Conceptualization:</p>	<p>1.1 Prepare a clear fact sheet describing the project, its expected location and coverage, and the estimated costs. The language and terminology used in the description should be accessible to those people who will be affected by the project. Provide information on who to contact to know more about the project.</p> <p>1.2 Conduct stakeholder analysis with project implementing agency, line agencies (national and provincial), and concerned local governments to determine which groups, household, settlements will be most affected by the project, in particular vulnerable groups.</p> <p>1.3 Distribute the fact sheet in the affected area as widely as possible through leaflets, and posting in community spaces.</p> <p>1.4 Organize a public information session open to all to inform the</p>	<p>Stakeholder inception workshop</p> <p>Public information session.</p>	<p>.5 mth International PP Spec.</p> <p>1 month National SS Specialist</p> <p>Leaflets / Information poster</p> <p>Workshop and travel costs.</p>

Project type	Structural Flood Protection Measures		
Stages	Activities	Events	Resource required
	<p>community about the project and answer questions.</p> <p>1.5 At the public information session, collect contact information from those that consider themselves affected or inform them of how to notify the project that they wish to attend future consultations.</p> <p>1.6 Map out the communities to be consulted in the design based on most affected settlements, and representation of different types of geographic/ethnic areas that will be affected.</p> <p>1.7 Assess the important characteristics of communities in the target area that must be considered in assessments and consultations. These will include:</p> <ul style="list-style-type: none"> <li>▪ Language and cultural practices for community decision-making</li> <li>▪ Opportunities and constraints to women's participation in planning</li> <li>▪ Potential sources of conflict / competition for resources that need to be considered in the participatory process.</li> </ul>		
2. Project Design: Assessment	<p>2.1 Identify key NMC and/or Project Executing Agency personnel or Sub-contractors (Mass organizations / NGOs) that can be trained to lead consultation and planning exercises in communes and villages. This group would be the Community Facilitators</p> <p>2.2 Conduct a rapid training needs assessment of the Community Facilitators.</p>		<p>.5 mth International Public Participation Specialist</p> <p>1 mth National SS Specialist</p>

Project type	Structural Flood Protection Measures		
Stages	Activities	Events	Resource required
	<p>2.3 Adapt sets of participatory development and social tools to be relevant to structural project design preparation.</p> <ul style="list-style-type: none"> <li>▪ Participatory Hazard, Vulnerability and Capacity Assessment, including assessing negative and positive impacts of flooding, traditional coping mechanisms, and needs for external support in flood protection and disaster management.</li> <li>▪ Participatory Rural Appraisal Tools for Mapping land use and community resources and assets, historical changes,</li> <li>▪ Social Assessment: Key informant interviews and Focus Groups with Affected populations to contribute to assessment of social impacts: on land-use, forest use, water use, Gender assessment, Ethnic profile as per the guidelines.</li> </ul> <p>2.4 Establish a format for summarizing information from the consultations for use by the Project Executing Agency in the design process.</p> <p>2.5 Conduct a Training of Community Facilitators.</p> <ul style="list-style-type: none"> <li>▪ Day 1 of Training would be Introduction to design of Structural Flood Protection Works in the LMB</li> <li>▪ Day 2 - 3: Training on tools and facilitation skills for participatory planning, including practicum in one of the communities to be consulted within the project preparation.</li> </ul>		

Project type	Structural Flood Protection Measures		
Stages	Activities	Events	Resource required
<p>3. Project Design: Analysis of Impacts and Mitigation</p>	<p>3.1 Based on mapping from 1.6 Community Facilitators conduct consultations, focus groups sessions and key information interviews in targeted localities with support from National SS.</p> <p>3.2 Identify one person (e.g. leader of a community-based organization) in each settlement cluster to be a focal point for continued feedback on the design and progress of the project.</p> <p>3.3 Hold debriefing session of National SS Specialist and Community Facilitators at mid-way point between consultations to review quality of information collection and summarization.</p> <p>3.4 Finish consultations and document results of social impacts and community priorities for flood protection / livelihood development and their inputs on how to mitigate negative impacts of the proposed project.</p> <p>3.5 Use information from the communities in finalizing the project design. Develop options for compensation of negative impacts of the project, or options to support communities to be able to take advantage of positive impacts (eg. Diversifying cropping patterns based on flood protection; training on alternatives to agricultural production in areas of potential increased flooding).</p> <p>3.6 Design resettlement plans and land compensation in keeping with government / donor regulations.</p>		<p>.5 mth Int. PP Spec</p> <p>1 mth National SS to supervise the CF and assist in compilation of results.</p> <p>CFs : Travel allowances</p> <p>Travel costs Workshop and meeting costs</p>

Project type	Structural Flood Protection Measures		
Stages	Activities	Events	Resource required
	<p>3.7 Hold community consultations to either i) validate the options that will be included in the project design for compensation or ii) select among the options according to community priorities. Whether the purpose is validation or selection will depend on the nature of the project, and the resources available to compensate affected people.</p> <p>3.8 Identify other supports in the community (other projects, NGOs, Government programs) that can support communities to mitigate negative impacts or take advantage of positive impacts of changes brought by the project.</p> <p>3.9 Identify existing community-based organizations (Water User Groups, Mass Organizations, Co-operatives, Disaster Management Committees) that could play a role in Operation and Maintenance.</p>		
<p>4. Dissemination of Public Participation Practice in other NMCs.</p>	<p>4.1 Review and refinement of public participation process and tools based on the experience by National SS and International PP.</p> <p>4.2 Experience sharing workshop / training on Public Participation in each country by National SS Spec. (could also be held at the regional level).</p> <p>4.3 Finalization of Public Participation in Toolkit and documentation of recommendations for its future use in project design.</p>	<p>Experience Sharing Workshop</p>	<p>.5 mth International PP Spec. .5mth National SS Spec.</p>



Project type	Structural Flood Protection Measures		
Stages	Activities	Events	Resource required
<b>During full implementation of Structural Measure</b>			
Stage	Activities	Events	Resources
5. 4. Project Implementation & Monitoring	<p>The process of public participation in the implementation of structural projects would be elaborated in more detail within the final project based on the specific type of project, location, and following the Guidelines on Public Participation, and Environment, Economic and Social Impact. The important steps in this process would be :</p> <p>5.1 Disseminate information about the project final design, start-up and progress through media, local broadcasts and other available means.</p> <p>5.2 Refresher training on facilitation skills with Community Facilitators to re-engage them in the process.</p> <p>5.3 Mobilize existing or new Community-based organizations (Women's Union, Water User Groups, Farmer Groups) for participatory monitoring of project implementation.</p> <p>5.4 Establish checklist to monitor:</p> <ul style="list-style-type: none"> <li>▪ Access routes, waste disposal, use of land, environmental impacts during construction</li> <li>▪ Quality of construction when appropriate</li> <li>▪ Monitoring and reporting of negative impacts on land and natural resources as construction progresses</li> <li>▪ Implementation of compensation packages</li> <li>▪ Implementation of resettlement plan</li> </ul>	<p>Press releases, Press conferences</p> <p>Workshops with stakeholder groups.</p> <p>Community monitoring meetings.</p>	<p>International Public Participation Specialist</p> <p>National Social Sector / Public Participation Specialists</p> <p>Allowances for Community Facilitators</p> <p>Travel costs</p> <p>Workshop and meeting costs</p>

Project type		Structural Flood Protection Measures		
Stages	Activities	Events	Resource required	
	<p>5.5 Community facilitators provide training on project design and activities to be monitored by the community.</p> <p>5.6 Establish feedback mechanism with Project Executing Agency, Contractors, relevant Government Authority to address problems during construction, or adjust design for unanticipated negative impacts.</p> <p>Establish mechanism for reporting and solving problems related to resettlement and compensation packages.</p>			
6. Project Implementation: Operation and Maintenance	<p>6.1 Provide training on Operation and Maintenance to final Project Holder (local government, line agency, etc.).</p> <p>6.2 Identify in the training how the community can be involved in the Operation &amp; Maintenance, depending on the type of structural work, size, location and anticipated maintenance requirements.</p> <p>6.3 Based on information from consultations, work with Project Holder to form community O &amp; M groups.</p> <p>6.4 Provide training and support to Operation &amp; Maintenance groups organizational development (Statutes of operation, Schemes to recover costs of maintenance where appropriate, small supports for operations) depending on the type of structure.</p> <p>6.5 Prepare materials and organize community meetings on what they should do or not do to contribute to maintenance of the structure.</p>	<p>Training on O &amp; M - to Community Facilitators / Project HOLDERS - to community</p>		

## **Appendix 2: Stakeholder Consultation**

### **Lao PDR**

Stakeholder consultation Interviews in Se Bang Fai Demonstration Project Area: March 2 to 4, 2009

During the three days field visit, the line agencies were consulted at a group meeting organized at LNMC. The SWC was consulted at province and district level and a focus group interviews were conducted at community level.

The interviews focused on the following aspects:

1. Role and function of the department & water users association
2. Damage due to floods and existing coping mechanisms
3. Existing flood protection measures in the area
4. Extent and type of public participation in flood protection measures implemented in the area
5. Stakeholders' Analysis: Identifying stakeholders who are likely to support or oppose the structural flood project measures demonstration project

#### **1. LNMC – Stakeholder consultation**

The following stakeholders participated in the preliminary consultation meeting.

- a. Department of Irrigation
- b. Department of hydrology & Meteorology
- c. Department of Water Resources
- d. National Disaster Management Organization
- e. LNMC
- f. Department of Land use
- g. Water Resource and Environment Research Institute (Newly formed)
- h. Department of water ways
- i. National Disaster Management Committee

Many staffs present were new and because of the institutional changes, some departments were recently formed. The Department of Agriculture and Fisheries were not present. This created hurdle in effective participation of the stakeholders in the meeting.

Each Line agency shared the role of the department, involvement in flood protection and disaster mitigation, and the extent of public consultation. They provided feedback to the extent possible on the demonstration project but could not go into details.

However, this provided an opportunity to understand the restructuring of some departments, role of LNMC and it highlights the need for conducting a proper stakeholder analysis

#### **2. Nongbok District Administration**

Mr. Khanty Phothin, District chief, Nongbok District Administration Bureau

This was a courtesy visit before meeting the district SWC

#### **3. Social Welfare council (SWC)**

Mr. Menang Ma Phetsinha, head, SWC Khammuane Province

Mr. Kao Intha Pakkathong, Vice President, Head of Labour & Social Welfare Nongbok District

Role

- Main coordinating body for disasters – reconstruction, recovery and rehabilitation of structures

Existing Public Participation

- People participate in construction
- Disputes about dike passing through someone's land is settled through negotiation
- Assist in modifying land title without fee
- People mobilize help from within the community to repair damaged houses

Feedback on Demonstration Project

- They have not heard about it so far
- Aware of the flood mitigation issues through involvement of ADPC & Red Cross
- The project is in line with their thinking and feel happy that their inputs at the earlier stages have been incorporated
- They already have plans to construct several dikes for flood control and is implemented as and when the Government is able to mobilize resources

#### **4. Sok boe & Hatsai Phong village, District Nongbok**

Village Background

- No. of house holds = 125
- Population = 725
- Land holding: Majority have 1.5 ha and a few farmers have up to 6 ha
- During the floods, everyone is involved in fishing
- Tobacco, corn, chillies, beans and vegetables grown on the banks of the Se Bang Fai where possible

Problem due to floods

- Everyone in this area hate floods
- Floods destroy houses, damage crops, and also destroys or damage other assets
- Women don't like the floods as the grain and food stock is also destroyed
- Big floods once in 3 years

Feedback on Demonstration project

- They always wished to have dike along Se Bang Fai like in the Savannakhet province on the other side of river
- Will create positive benefits for agriculture, but not sure how it will impact fishing.
- Will help in growing the wet season rice. Farmers will likely allocate more area under rice during the flood season when flood protection measures are implemented as the cost of cultivation is low. Dry season rice is expensive to cultivate. The farmers don't earn more than \$ 100/ha. Farmers are likely to reduce area under dry season rice after the project is implemented. It costs \$ 400 to cultivate dry season rice, which includes cost of seed, transplanting, other labour, fertilizer and pest management. In addition to this, farmers pay \$ 60 as electricity fee (which includes tax) to the commune for maintaining the irrigation pumping stations
- Men would like to have dike after the village, while women would like before the village

Issue to consider

- Potential change in land use, crops etc. depending on the affordability of farmers
- Need to analyse alternative crops as dry season rice is expensive
- Integrated approach to maximize the benefits.
- Link Agriculture and Fisheries
- Existing pumping stations and irrigation schemes

## **Attachment 5      Implementation Public Participation Plan**



## CONTENTS

	Page
1 INTRODUCTION	1
1.1 Objective of Stakeholder consultation	1
1.2 Scope of Stakeholder consultation	1
2 CAPACITY BUILDING OF LINE AGENCIES IN COMMUNITY CONSULTATION	2
2.1 Learning Objective of Capacity building of Line Agencies	2
2.2 Participants	2
2.3 Consultation with Line Agencies and capacity building	3
2.3.1 Instructions on Community Consultation Steps	5
3 IMPLEMENTATION OF COMMUNITY CONSULTATION	6
3.1 Lower Xe Bang Fai, Lao PDR	6
3.2 Demonstration Project Alternatives	6
3.3 Selection of Villages	7
3.4 Community Consultation in Xe Bang Fai	9
3.4.1 Summary of Group Presentations	9

## LIST OF APPENDIXES

**Appendix 1: Stakeholder Consultation Implementation Schedule**

**Appendix 2: Community Consultation Guide**

**Appendix 3: List of Line Agencies Participants**

**Appendix 4: Excel file of Consultation by sub-groups within the 16 villages**





## 1 INTRODUCTION

A preliminary stakeholder analysis and consultation was conducted in March 2009 to identify the key stakeholders for consultation on structural flood protection measures in the Lower Xe Bang Fai and understand the issues that the communities want to prioritize for dealing with floods. In the field area, the preliminary consultations were conducted together with the National Social Sector Specialist, and Provincial and District Social Welfare Council representative.

Subsequently, the Best Practice Guideline on Public Participation was updated to help the NMC and Line Agencies facilitators conduct stakeholder consultation exercise in the demonstration projects. The stakeholder consultation schedule was prepared and implemented in the Lower Xe Bang Fai in Nongbok district from May 26 to 29, 2009 (Appendix 1). Given the time and budget, the focus of public participation was on community consultation.

The participation of communities in giving feedback on the ideas for demonstration project is aimed to better understand the situation and take into account the priorities of the communities, especially the vulnerable groups within the community. The consultation helped in validating the assumption regarding benefits and concerns of the communities when the project is implemented.

### 1.1 Objective of Stakeholder consultation

The objectives of Stakeholder consultation in stage 2 planning of the structural flood protection measures demonstration project are to:

1. Better understand the priorities and needs of the community in flood risk management
2. Get feedback on the demonstration project and incorporate the needs and priorities into the project
3. Build capacity of NMC and Line Agencies in facilitating community consultation during the implementation of the demonstration project.

### 1.2 Scope of Stakeholder consultation

This stakeholder consultation in the Lower Xe Bang Fai in Khammuouan province is restricted to Nong bok district, as this area is highly flood prone. Flooding in this area is from Xe Bang Fai, Mekong and also rainfall in the flood plain area when it does not drain out quickly enough.

Although, consultation on the northern districts in Kahmmuouan province above Nong bok and on the Suvanakheth province on the left bank would provide more detailed information and capture the needs and priorities of a wider population, it was decided to focus only on Nong bok district given the time and budget limitations. This approach allowed conducting consultation with larger number of Line agencies representatives and the communities in Nong bok district.

The consultation educates the Line agencies and communities on the demonstration project ideas and sets the stage for future participation. The consultation should be seen to build the rapport with the community, while getting initial feedback on the structural measures, its benefits and impacts on agriculture, fisheries, livelihoods and environment. While the time required to explain and knowledge level of communities may, at times, be insufficient to foresee the impact on environment issues. The output of this consultation captures the needs and priorities of the communities and Line agencies

representatives based on their experience in the area. This needs to be integrated into the design and the results of other studies related to environmental examination, agricultural development scenarios and economic impact studies.

## **2 CAPACITY BUILDING OF LINE AGENCIES IN COMMUNITY CONSULTATION**

The public participation plan developed in Stage 1 envisaged that the consultation with the community would be done by the Line agencies representatives and they be trained in conducting community consultation session. This plan has been implemented in May 2009.

The LNMC and Line Agencies facilitators who have responsibility for making consultation at community level were selected by LNMC to implement public participation plan in the demonstration project areas.

In Lower Xe Bang Fai, representatives from LNMC and Nong bok District Line agencies were trained to facilitate community consultation on getting feedback on structural measures for flood protection. A community consultation facilitation guide was also prepared and translated in Lao language and the Line agencies representatives were trained to facilitate community consultation (Appendix 1).

### **2.1 Learning Objective of Capacity building of Line Agencies**

The objective of the capacity building exercise was that at the end of the implementation of the community consultation exercise, the line agency participants are able to:

1. Explain the need for public participation in structural flood protection project
2. Explain how to conduct stakeholder analysis
3. Conduct stakeholder consultation using participatory methods
4. Summarize findings from stakeholder consultation exercise and propose alternative solution

### **2.2 Participants**

Based on the experience in preliminary stakeholder consultation in March 2009, the following participants were proposed for consultation in Lower Xe Bang Fai field area in Nongbok District:

1. One LNMC representatives
2. One representative from WREA
3. Khammaoun Provincial Labour and Social Welfare (Provincial Disaster Management Committee) representative
4. Labour and Social Welfare Officer representative, Nongbok District
5. Line Agency representatives responsible for facilitating at community level in Nongbok District.
  - a. One representative from Irrigation office, Nongbok District
  - b. One representative from Agriculture office, Nongbok District
  - c. One representative from Fishery office, Nongbok District
  - d. One representative from Water and Environment office, Nongbok District
  - e. One representative from Planning Office, Nongbok District
6. Any NGO or Mass Organization representatives at Nongbok District level

Apart from these participants, the National Social Sector and Public Participation specialist and representative from Lao consulting group also participated to help with facilitation and translation. List of participants (Appendix 3)

### 2.3 Consultation with Line Agencies and capacity building



The capacity building focused on the need for community consultation and some of the tools that would be used in community consultation. The exercise also served to get feedback on the demonstration project from the Line agencies participants.

In the plenary, the participants discussed the hazards, disasters or problems in Nongbok district and their proposed solution to overcome these hazards and disasters. The following hazards & disaster and solutions were highlighted

Problems	Solution
Flood	Create public awareness in the flood prone area
Rice Marketing	Construction of dike
Road Network	Flood control gates
Diseases during flood	Supply additional seeds after flood damage to crops
River Bank Erosion	Supply boats
Insufficient Irrigation	Supply medicines
Irrigation Infrastructure destroyed by floods every year	Improve irrigation system
Drought	Additional irrigation system
	Improve access to credit
	Widen natural drainage canals
	Increase cultivated area (low lying area during dry season)
	Organize market linkages

Flood is the most important hazard in Nong bok district. A number of disasters like destruction to houses and properties, diseases, erosion of river bank and damage to other infrastructure in the village happens causing loss to productive asset and hence further economic losses.

The solution proposed covers both structural and non-structural measures and creating financial and market support and linkages.

The participants were then divided into two groups and they prioritized the solution based on what they would choose depending on whether funding was available or not to implement the suggested solutions.

Preferred Solution (funding is not a problem): For all the participants the preferred solution was

1. Increase irrigation
2. Dike + Drainage + Pumps

Preferred Solution (No funding)

This discussion was in three groups. The idea was to introduce consultation in separate groups giving opportunity for different perspectives and opinions to be expressed leading to further discussion, analysis and consensus building.

Group 1 and 3 focused on soft measures of improving irrigation during the dry season to create economic benefits through better credit and marketing. Group 2 focused on structural measures to control flood combined with non-structural measure of early warning system and supply of seeds and piglets during the wet season.

Group 1	Group 2	Group 3
1. Improve irrigation system 2. Access to credit for pig rearing (Vientiane market) 3. Alternative crops: tobacco, vegetables	1. Flood control gate: improve + new, widen drainage canals (construct dike only in lower areas – flood proofing) 2. Public awareness: Early warning system 3. supply seeds: rice + other crops; piglets	1. Improve irrigation 2. access to credit 3. Marketing + price guarantee

The demonstration project and the two proposed alternatives were introduced and consultation for feedback on the demonstration project was done in three groups. One group discussed Alternative 1 and the other two groups discussed Alternative 2.

Feedback	Group 1	Group 2	Group 3
Option	Dike along Xe Bang Fai and Mekong	Dike along Xe Bang Fai only	Dike along Xe Bang Fai only
Positive	1. flood free 2. Increase in livestock grazing area 3. Village assets like schools, irrigation systems, offices will not be affected	1. flood free 2. reduction in animal disease 3. crop productivity will increase 4. ground water recharge will increase 5. fish in se bang fail will increase	1. Houses will not be damaged 2. productivity will increase 3. aquaculture will not be destroyed 4. investment risk reduced 5. roads will not be affected 6. village infrastructure will be safe
Negative	1. Fish will decrease 2. River bank erosion will increase	1. river bank erosion 2. level of flood could be higher than before in the villages 3. dike construction through paddy field (loss of productive land - land acquisition). 4. fish in flood plain will reduce. 5. area near Mekong may be flooded	1. fish will reduce in flood plains 2. river bank erosion will be more
Conclusion	Positive impacts outweigh the negative impacts		

The major concern expressed by the participants is increase in erosion to river bank as the water level in the river will increase because of the dike and flood control gates. The other concern is reduction of fish in the flood plains. Controlled flooding will ensure that fish catch does not diminish in the flood plains. River bank erosion is an issue that needs to be addressed in the design of the structural measures.

Participants recapped the steps in consultation and how creating structure of discussing in pairs and groups ensured that each and everyone in the group could participate to share their ideas. The participants expressed that the advantage of taking everyone's idea was that a comprehensive set of solution could be discussed and when implemented it will satisfy everyone's needs.

### 2.3.1 Instructions on Community Consultation Steps

This set the stage for discussing how to conduct community consultation session. The community consultation guide was introduced (Appendix 2). Are there different needs of people in the community in the event of flood? Are the people affected equally? Poverty, location of the house in the village, type of houses, women and children were some of the factors that would determine the way in which people would be impacted. All these groups of people would be affected differently and hence it is important to discuss with them separately in groups. How to conduct vulnerability analysis was explained.

The focus of the session was exploring with the participants their understanding of vulnerability or sensitivity of the people in the village to floods. The Line agency participants had not been thinking of different effects of floods on different groups of people. This session helped them to understand the meaning of vulnerability and how to conduct vulnerability analysis and identify these groups in the community consultation session by exploring based on some criteria such as location within the village, age, gender, coping mechanism, and poverty level.

The steps in conducting vulnerability analysis were explained to the participants. This was followed by exploring the tools that would be employed by them in the community consultation. Group Discussion (separately with men, women, poverty groups), time Line (floods and its severity, other hazards), village asset mapping (location of schools, temples, govt. offices, houses, fields, irrigation infrastructure etc.) to understand vulnerability was explained.


The steps in conducting community consultation exercise were explained to the participants. The logistics was finalized and the team was divided into four groups and villages were assigned.

	Group 1	Group 2	Group 3	Group 4
Team Members	Khonpachim Sukhi Khampeng	Khamphouthone Khamphene Phonapaseuth	Suvanno Inthaua Dilip Chinnakonda Malayveng	Khampeng Lat Than Sae Senpathy
Day 2 villages	Sok Boe Phak Ithu Na Tay	Tha Muang Phon Sao Ae Pakse	Dong Sangam Hat Xie Phong Sadev	Sam Nady Nong Lom Dong Kasim
Day 3 villages	Phone	Dongkhang	Nong Bok	Nam Man

### 3 IMPLEMENTATION OF COMMUNITY CONSULTATION

#### 3.1 Lower Xe Bang Fai, Lao PDR

The project area refers primarily to the flood prone area of the Xe Bang Fai downstream of the crossing with the National Road Nr 13. The location of the area is shown in the following figure:

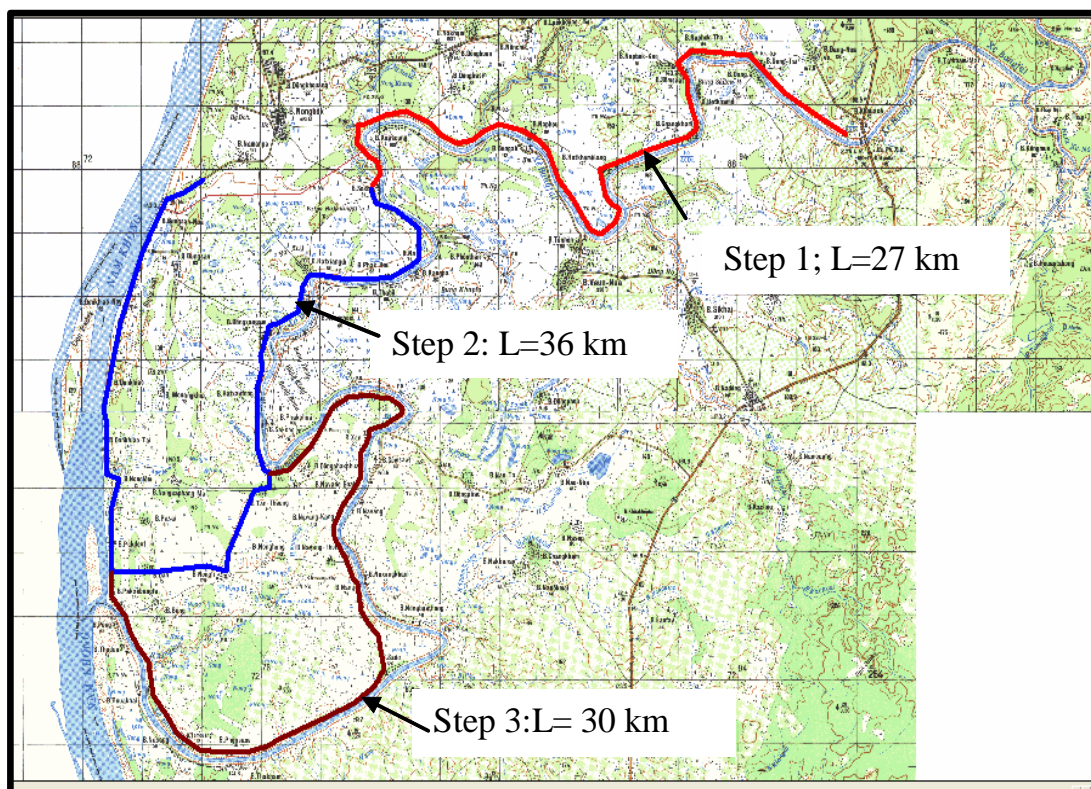

#### 3.2 Demonstration Project Alternatives

The following two demonstration project alternatives were explained to the community to get their feedback with the help of the above map.

Alternative 1: Construction of dike along Right bank of Se Bang Fai and Mekong River in three phases

##### *Phase 1*

A dike between Banne Nongbone in the Sebangfai District and Banne Sokbo in the Nongbok District (27 km). 4 new control gates at tributaries that discharge into Se Bang Fai. 4 pumping stations. 3 km long drainage channel

##### *Phase 2*

The dike will be extended over a length of 36 km from Banne Sokbo to Banne Bungsanetha. 4 new control gates and 5 gates will be repaired. 9 pumping stations  
5 km long drainage channel

##### Phase 3

Another 30 km of dike will be constructed between Banne Tantheung and Banne Danepakse in the Nongbok District. 1 new control gates and 5 gates will be repaired.  
2 pumping stations. 3 km long drainage channel.

Alternative 2:

Another consideration is to construct dike only along Se Bang Fai. The dike runs between Banne Nongbone in the Se Bang Fai District and Banne Danpakse in the Nongbok District and has a length of 65 km

9 new control gates and 5 existing gates have to be repaired and drainage channel at 4 locations.

### 3.3 Selection of Villages

The Xe bang fai focal area encompasses Nongbok district which is located in the south western corner of Khammouane Province. The district is situated to the north of the Xe bang fai River between the Mekong River (to the west) and Route 13S (to the east). It is affected annually by combined floods that are the result of the flat topography, high flows and poor conveyance capacity in the Xe bang fai River and high water levels in the Mekong River that back up into the tributary. A normal flood starts in mid-to-late July and lasts 15 to 30 days. There is usually one peak up to 1.5 m; waters rise over 5-7 days and then take about 30 days to recede.

A total of 16 villages were selected, which accounts for 22% of the 72 villages in Nong Bok District. The villages were selected based on the vulnerability characteristics. Since the villages on the Levee are prone to flooding than villages in hinterland, 12 villages on the Levee were selected and the other 4 villages selected from hinterland villages.

#### Xe Bang Fai Community Consultation Village list

Name	Riparian /Hinterland	Latitude	Longitude	Elevation (mts)
Dong Kasin	Riparian	17 5'17.14"	104 51' 10.23"	143
Sok Boe	Riparian	17 3'41.31"	104 49' 50.64"	145
Na Tay	Riparian	17 2' 27.83"	104 50' 29.01"	144
Phak Itou	Riparian	17 2' 18.51"	104 49' 54.27"	145
Dong Sangam	Riparian	17 1' 18.10"	104 47' 45.69"	150
HatXieng Fong	Riparian	17 0' 4.76"	104 47' 34.13"	144
Sam Nady	Riparian	16 59' 33.23"	104 49' 37.72"	145
Sadeu	Riparian	16 55' 34.07"	104 50' 3.24"	144
Phone Sao A	Riparian	16 54' 9.67"	104 47' 12.69"	141
Tha Muang	Riparian	16 54' 11.56"	104 46' 24.78"	142
Pakse	Riparian	16 56' 45.09"	104 44' 48.48"	139
Nong Lom	Riparian	16 58'39.68"	104 44' 53.22"	146
Na Man Pa	Hinterland	17 4' 18.93"	104 47' 20.39"	150
Doung Khoung	Hinterland	17 5' 45.88"	104 47' 54.22"	161
Nong Bok	Hinterland	17 4'38.85"	104 48' 10.54"	152
Phone (close to Nongbok town)	Hinterland			

Nearly everyone living in Nong bok district belongs to Tai speaking ethnic groups (96%), with only a small proportion of minority ethnic groups. Nong bok is not a designated priority poor district as identified in the poverty reduction strategies of the Government of Lao (GoL).

According to the Social survey conducted in 2008, the ethnic and poverty conditions reduce the social vulnerability of these communities for the following reasons:



- (i) These communities are culturally and linguistically homogenous. This contributes to effective social and community networks that are an important asset in dealing with flooding planning, response and recovery on an individual, household and community basis.

*Everyone in the village is brothers and sisters, aunts and uncles or very close friends. So, during the flood they help each other out as a gift or a loan without interest (Nongbok focus groups).*

- (ii) The low levels of poverty mean that, in general, households in Nongbok are less vulnerable to harm caused by flooding and other natural disasters. People live in substantial housing, have livelihoods, assets and incomes that meet (or exceed) basic household needs, have better levels of health and education and other characteristics that enable them to protect themselves from flood damage and/or to recover more easily following flooding.

The implications for social vulnerability include:

- (i) The large proportion of children in Nongbok tends to increase vulnerability to the impacts of flooding. Children are often at risk of physical injury and drowning during floods. They may be more susceptible to becoming sick, for instance, if there is no safe drinking water or proper sanitation during floods. If flooding damages schools, children's education will be disrupted. Moreover, the high dependency ratio places extra burdens on parents and other adults to provide for children's needs for food, shelter, etc.

Traditional methods of flood warning include markings on riverside trees, other markers on river banks and water levels at houses and other structures. These have been associated with staged actions such as relocating animals, removing possessions to upper levels of structures, stocking rice and water for one month, relocating children and elderly people and, finally, tying the house to nearby trees. The strength of this system was that it was easy for people to learn and remember, and it could indicate rather precisely when different actions should be taken. However, when a tree is cut or a portion of the riverbank is eroded, important markers are lost.

In Nongbok, different strategies have been used to respond to floods although the success has not been high according to FG participants:

The Office of Social Welfare is responsible for emergency response. The planning is done without consultation of people living in the area although they participate as much as possible in flood protection practice/drills. However, in a bad flood the waters rise too fast and too high.

### 3.4 Community Consultation in Xe Bang Fai



The consultation in 16 villages was done in two days time by four teams consisting of 3 to 4 members each from Line agencies. Each team consisting of Line agencies participants and one each from the facilitation group conducted community consultation exercise in four villages in two days time.

The teams followed the steps in consultation, conducting vulnerability analysis and

dividing the groups on this basis. About 20 villagers pre-selected by the village chief on the basis of criteria of equal representation of women and vulnerable people participated in the consultation.



The groups were either divided as men and women or poor and rich depending on the situation in the village. One of the important indicators of vulnerability during the floods was whether the families possessed a boat. Families with boat could easily move with their belongings to neighbouring villages, while the families without boat were unable to move with their belongings easily. They have to wait until help arrives, which in most cases arrives too late and they were not in a position to save their belongings and food stock. In some villages, the consultation was done separately with the group that had boats and the group that did not have boats. In other villages, it was done separately with men and women groups.

Phone Sao Ae and Tha Muang, located on the lower elevation had to be reached by boats as road access is not possible once it starts raining.

#### 3.4.1 Summary of Group Presentations

The four groups presented summary of consultation in the respective villages. The presentation was organized according to the consultation form. It was organized as follows: exploring hazards and disasters, feedback on demonstration project and preferred option, its benefits and negative impact, what changes they would bring in agriculture and other livelihoods after the demonstration project, the developments they want to see in their village, and what resource they could bring to the demonstration project.

The discussion on the location of dike during the community consultation led to difference in opinion between men and women. The women would prefer to have the dike in between the river and the village to protect the houses and livestock as well. However, they agree with the men when they argue that it poses greater risk in the event of dike breaking. They also understand that if the dike is to be constructed in between the village and the river, there should be at least 30 m distance between the river and the dike. All the villages are too close to the river and many houses would have to be resettled if this option is chosen.

All groups in the 16 villages opted for the Alternative 2, which is construction of dike along the right bank of Xe bang Fai river with drainage and flood control gates.

In Xe bang fai, the attitude of the people is to reduce the existing risk and damage of flood and to have a modest improvement in livelihoods opportunities

1. Dike, flood control gates and irrigation system is very important for them to reduce exposure of flood to the agriculture areas
2. Irrigation system maintenance will become easier and this will reduce the cost of electricity and irrigation
3. Most of the villages are too close to xe bang fai river and hence they cannot be protected by dike, although women would prefer to protect the village as well. The men would want to protect the agriculture land and live with floods in the village for few weeks. However, women demand that all the families in the village have boats, medicine, and safe shelter to move during the floods and remain disease free. They are not prepared to move as they are already on the higher ground.
4. Some villages like Dong Sangam can be protected by dikes and this option should be explored.
5. Dike around the village (polder) option can be explored. In this case, the dike should be higher than the agriculture dike
6. Land acquisition for dike construction is a concern and they would prefer to be compensated with land rather than cash.
7. Impact on fishing and environment was not expressed clearly by the communities. They expressed that the amount of fish might reduce. They are aware of fish migration and breeding and that majority of it takes place in the ponds in the flood plains.

Since the dike will not protect the village from flooding, as it will be built between the village and the agricultural land on the existing road, it will be important to integrate non-structural measures and create opportunities to increase the number of boats in the village for vulnerable groups to move to neighbouring village with their belongings.

They are ready to participate in the construction of dike and some are also willing to contribute land if it is a small portion. They are also willing to contribute labour for the construction of dike.

The detailed consultation result is presented in the following table

**Presentation of Community Consultation****Province: Khammuoan****District: Nong Bok****Villages: 16 villages****Groups: 4**

Description	Group 1	Group 2	Group 3	Group 4
<b>Village</b>	Sok boe, Phak Itu, Dong Kasin, Naman pa	Phon Soa Ae, Sam Nady, Sadoue, Ban Phone	Tha Muang, Pakse, Non glom, Nong bok	Hat Xieng Fong, Dong Samgam, Na Tay, Dong Khoung
<b>Vulnerable groups</b>	Women, children, elderly and families without boats	Women, children, elderly and families without boats	Women, children, elderly and families without boats	Women, children, elderly and families without boats
<b>Hazards</b>	Floods (Aug to Sep)	Flood is the main hazard	Flood	Flood
<b>Disasters due to flood</b>	Rice crop. 174 ha in Sok Boe, 130 ha in Phak Itu and 200 ha in Dong Kasin About 30 ha of cash crop destroyed	Apart from destruction to rice and cash crop, other disasters relate to River bank erosion Houses at risk Human and animal disease 60% of households at risk	Damage to paddy: 278 ha	Damage to crops and also houses.
<b>Existing Structure</b>	Floods occur every year and there are no structural measures to protect against the flood. Sand bags are provided by the Disaster committee.	There are no existing structures for protecting against flood.	No structural measure to protect from floods	No existing structures to protect from flood.
<b>Occupation</b>	agriculture, fishing, pig rearing, hand-craft and small business in the village.	Farmers, merchants, labour	Farmers, livestock, crops, fisheries, business (small number)	Farmers, livestock rearing, fisheries, business
<b>Effect of flood</b>				
<b>Coping mechanism</b>	The only coping mechanism is Early warning system, flood			Move animals to neighbouring village on

	markings and moving animals to another village			higher ground.
<b>Feedback on Demo project</b>	<p>The preferred option is dike along Xe Bang Fai only. They fear that dike along Mekong might not drain out water sufficiently causing flooding.</p> <p>Dike construction might need acquisition of productive land and houses. They propose to avoid this situation. If this cannot be avoided they would like to receive land as compensation and not cash.</p> <p>They also propose to construct flood control gate at Sok boe and drainage channels at Bam Na man pa and Thon Kala Tha.</p>	<p>Their preferred option for dike is to construct it along the road, which is outside the village and hence there will be minimal need for land acquisition or house resettlement.</p> <p>They see that drainage will be very important to ensure that rain water is drained out as well. They also would like to have pumping stations for removing rain water from the paddy fields in the low lying area into drainage canals.</p> <p>Their preferred option is option 2.</p> <p>Land acquisition is a concern for Bon Phone village (hinterland village), while the other three riparian villages are not concerned about losing small area of their land to construction of dike.</p>	<p>Option 2 is preferred by Nongbok and Nong lao and Option 1 is preferred by Tha Muang and Pakse</p>	<p>Option 2, dike only along the Xe bang fai river is the preferred option. Dike construction is preferred on existing road in between the village and the agriculture land by three villages except Dong Sangam to protect the crops. They are willing to have floods in the village for a few weeks as they are used to living with the floods.</p> <p>Dong Sangam is located 100 m away from the river and hence they would prefer the dike in between the river and the village to also protect the houses and other village assets. They suggest that the dike should be about 2 m as the flood level is about 1.5 m in this village.</p>
<b>Additional Structure</b>		<p>Flood control gates at Hoen Bonka di and Pakse, heng pa nim to sam naday.</p> <p>Drainage from nam voun (sam</p>	<p>Flood control gates at 3 places</p>	

		naday), nong phakse		
<b>Positive impact</b>	<p>The demonstration project will make the area flood free, which will help in increasing production of both wet season and dry season.</p> <p>Since the irrigation channels will not be destroyed or easier to maintain, they will also be able to grow some cash crop. This will also lead to reduction of payment for electricity as the water use efficiency will increase because of less wastage from irrigation channels.</p> <p>They will be able to use well water all year round</p> <p>They will also be able to use toilets all the year round</p>	<p>Increase in rice production</p> <p>Good road</p> <p>Income from cash crop</p>	same as other groups	
<b>Negative Impact</b>	<p>They don't see any major negative impact from the demonstration project, except for land acquisition because of the dike building and loss of fishing during flooding season.</p> <p>The flood season also offers opportunity to travel in flood plain for social gathering and entertainment on higher ground. They will lose this social and entertainment benefit from the floods.</p>	<p>On paddy land that is not protected by dike</p> <p>Productive area could reduce due to land acquisition for dike construction and loss of fertilization effect of floods</p>	land acquisition	There could be potential negative impact on fishing as fish migration in the flood plain may be affected.
<b>Changes</b>	From rice farming to aquaculture			

	Dry season rice to more wet season rice Cash crops like corn, sugarcane instead of dry season rice			
<b>Development</b>	Village dispensaries (hospitals) Government run schools Paved roads Government offices in the village Markets for a group of villages	Village fund (credit) Better quality cash crop can be exported to Thailand		Boats for 55 to 60 people Hospital and medicines Sand bags to protect from flood in case of big flood
<b>Resource</b>	Participate in construction of the dike Some agree to give their land for construction of dike if it's a small portion of land they have to lose. Contribute labour Load material	Contribute land for construction of dike Provide labour Maintenance of structure	Contribute labour for construction of dike	Contribute labour for construction of dike

**Appendix 1: Stakeholder Consultation Implementation Schedule**

**Facilitator:** Mr. Dilip Chinnakonda, Public Participation specialist supported by Mr. Sae Senpathy, National Public Participation Specialist

**Day 1:** May 26, 2009

**Location:** Takhekh

**Venue:** Disaster Management Committee office

**Purpose:** Instructions on Stakeholder Consultation Process

<b>Time</b>	<b>Topic</b>	<b>Resource / Method</b>
08:30 to 9:00	Registration	Registration sheet
9:00 to 9:15	Welcome and Opening	LNMC/WREA
9:15 to 9:45	Introduction to the consultation process and Expectations	Input
9:45 to 10:30	Introduction to the Se Bang Fai Demonstration Project Options	Input
10:30 to 10:45	Break	
10:45 to 11:30	Explore Participants' understanding of the need for Public Participation	Open Questions
11:30 to 12:00	Introduction to Public Participation Methods	Input
12:00 to 13:00	Lunch	
13:00 to 13:30	Introduction to Stakeholder Analysis	Input
13:30 to 14:30	Discuss a. Stakeholder Analysis Matrix b. Type of Information c. Questions to ask the Stakeholders Prepare Stakeholder Consultation plan for Day 2 and 3	Group Work
14:30 to 15:30	Presentation and discussion: How to conduct stakeholder consultation by participants	Plenary
15:30 to 15:45	Break	
15:45 to 16:30	Prepare Field Visit Consultation Logistics – Divide in 4 groups - Materials required - Transport - Tea / Lunch in the field - Number of stakeholders to be consulted by each group and expected outcome - ensure participation of all men, women and excluded communities	Plenary
16:30 to 17:00	Wrap Up	



**Day 2:** May 27, 2009

**Location:** Communities in Nongbok District

Tea and Lunch to be managed during field visit

**Purpose:** Consultation at community level

Time	Activity	Resource / Method
7:30	Depart for field	
9:00 to 10:00	Consultation with District level stakeholders	Information sharing, focused group discussion
10:00 to 10:30	Travel to field	
10:30 to 13:00	Community Consultation (first community) <ul style="list-style-type: none"> <li>- Present Se Bang Fai demonstration project Options</li> <li>- Vulnerability, Social analysis and impact on environment</li> <li>- Potential benefits and negative impact discussion</li> <li>- Alternative solution for potential problems from perspective of different stakeholders (men, women, vulnerable groups separately)</li> <li>- Development Vision of stakeholder</li> </ul>	Information sharing – Visual Flip Charts, Maps PRA tools Transect walk Focused Group Discussion Visioning Exercise
13:00 to 13:30	Travel to second community	
13:30 to 16:00	Community Consultation (second community) Same as First Community	
16:00 to 17:00	Travel back	

**Day 3:** May 28, 2009

**Location:** Communities in Nongbok District

Tea and Lunch to be managed during field visit

**Purpose:** Consultation at community level

Time	Activity	Resource / Method
7:30	Depart for field	
09:00 to 09:30	Travel to field	
09:30 to 12:00	Community Consultation (third community) <ul style="list-style-type: none"> <li>- Present Se Bang Fai demonstration project options</li> <li>- Vulnerability, Social analysis and impact on environment</li> <li>- Potential benefits and negative impact discussion</li> <li>- Alternative solution for potential problems from perspective of different stakeholders (men, women, vulnerable groups separately)</li> <li>- Development Vision of stakeholder</li> </ul>	Information sharing – Visual Flip Charts, Maps PRA tools Transect walk Focused Group Discussion Visioning Exercise

12:00 to 12:30	Travel to second community	
12:30 to 13:00	Community Consultation (fourth community) Same as above	
13:00 to 16:00	Travel back	
16:00 to 17:00	Summarize findings	

**Day 4:** May 29, 2009

**Location:** Takhekh

**Venue:** Disaster Management Committee office, Takhekh

**Purpose:** Analysis of Community consultation

Time	Topic	Resource / Method
8:30 to 9:00	Introduction to day's activities and status check	
9:00 to 10:00	Prepare Presentation of Consultation	
10:00 to 10:15	Break	
10:15 to 11:15	Group 1 Presentation <ul style="list-style-type: none"> <li>- Consultation process</li> <li>- What was the experience</li> <li>- Summary of findings</li> <li>- What are the anticipated changes in the project</li> <li>- Discussion</li> </ul>	Charts, Pens, Boards,
11:15 to 12:15	Group 2 Presentation	
12:15 to 13:00	Lunch	
13:00 to 14:00	Group 3 Presentation	
14:00 to 15:00	Group 4 Presentation	
15:00 to 15:15	Break	
15:15 to 16:00	Summary and Further Consultation and Communication mechanism	
16:00 to 16:30	Wrap Up and Closing	

## **Appendix 2: Community Consultation Guide: Xe Bang Fai Demonstration Project, Nong Bok District**

### **1 Purpose of Consultation**

The purpose of the consultation with the community is to get feedback on the structural measures options for flood control in the Lower Xe Bang Fai area. The project is at conceptualization stage; hence it might be difficult to outline the detailed structures at village level. However, participation of stakeholders in discussing the conceptualized options can help in better design and planning of flood risk management in the subsequent stages.

This should be seen as an initial consultation to develop a common understanding about the options for flood control measures. It will lay the foundation for future consultations and greater participation of all stakeholders in decision making.

### **2 Village Selection**

The consultations will be done in two days time by four teams consisting of 3 to 4 members each. The team should be able to manage to visit at least two villages in a day. A total of 16 villages will be selected, which will account for 22% of the 72 villages in Nong Bok District.

There are 20 villages along the Xe Bang Fai river and the other 18 villages in the hinterland that were chosen for selection. Only the villages along the Xe Bang Fai are prone to flooding. Hence, 12 villages will be selected along the Xe Bang Fai and the rest 4 will be selected from the Hinterland. Each team will cover visit 3 villages along the Xe Bang Fai river and one village in the hinterland.

### **3 Community Selection**

While selecting the people in the village for consultation, equal representation of men, women, ethnicity and vulnerable groups should be considered. A village socio-economic profile can be used to randomly select the community members for participation.

#### **3.1 Identifying Vulnerable Groups**

Vulnerability is the term used to describe exposure to hazards or shocks. People are more vulnerable if they are more likely to be affected by events that are beyond their control like floods, storm, drought, earthquake etc.

Different people in a community will be affected differently by hazards. While planning for options to check the likelihood of occurrence of hazard or reduce the chances of occurrence of hazard, it is important to consult with different groups of people in the community who will be affected to hazards differently.

A vulnerability analysis should be conducted before conducting stakeholder consultation for getting feedback on the demonstration project options to ensure that the feedback from the community represents opinion of all groups of people, and especially the vulnerable group.

If vulnerability analysis for a village community was already conducted, then use the results from that analysis to do stakeholder consultation for the demonstration project options.

### **3.2 Steps**

1. Introduce the purpose of meeting
2. Explain what information will be collected and how will it benefit the community
3. Explain how the information will be collected.
4. Explain the need for talking to all the groups in the village
5. Explain what is vulnerability and participatory vulnerability analysis

### **3.3 Vulnerability Analysis**

The following information will help in identifying the vulnerable analysis

1. Vulnerable levels by groups, location etc.
2. Identifying flooding and other hazards, when they occurred and how often.
3. Differences in vulnerabilities by gender, age, ethnicity, location etc.
4. How does each group cope with various hazards?
5. Identify the Govt. supported structures (like dikes, safe shelters etc) and systems (early warning)

### **3.4 Tools**

- Group Discussion (separately with men, women, ethnicity)
- Time Line (floods and its severity, other hazards)
- Village asset mapping (location of schools, temples, govt. offices, houses, fields, irrigation infrastructure etc.)

### **3.5 Key Questions**

1. What are the major hazards that the village has been faced with in the past. When did it occur, what was the level of damage
2. Which groups of households are more exposed to flooding and other hazards in the village?
3. Why were some groups able to cope better than the others?
4. What are the existing structures and systems for coping with floods and other hazards?

## **4 Steps in Community Consultation**

1. Divide the larger group into smaller groups based on the vulnerability analysis
2. Present the demonstration project options poster
3. Explain the likely structure in the village
4. Explain the intended benefits; which people are likely to benefit and in what way
5. Facilitate focused group discussion (smaller interest groups based on vulnerability) to collect feedback on the demonstration project options using PRA tools
6. Note down on the chart paper, concerns expressed by the smaller interest groups and discuss.
7. Note down solutions suggested by them to address the concerns
8. Analyze the options with the people and conclude which option is likely to work and which one is not likely to work and why
9. Use the questions in the consultation analysis form, note down on chart paper and fill the form

**Community Consultation Analysis Form**

<b>Community Background</b>	
Name of Country :	
Name of District :	
Name of Village :	
No. of Households :	
Name of Group consulted : (e.g vulnerable men, vulnerable women, better off men, better of women)	
<b>Vulnerability Analysis</b>	
<ul style="list-style-type: none"> <li>• What are the major hazards that the village has been faced with in the past. When did it occur, what was the level of damage?</li> <li>• How was this group of households affected by flooding and other hazards in the village?</li> <li>• How was this group able to cope with flooding and other hazards?</li> <li>• What are the existing structures and systems for coping with floods and other hazards?</li> <li>• What is the livelihood for this group (e.g. rice, fishing, labour, business etc.)</li> </ul>	
<b>Feed back on Demonstration project Options</b>	
<b>Structural Measures</b>	
<ul style="list-style-type: none"> <li>• Which option is preferred by this group</li> <li>• Does this group perceive any clash with neighbouring village or community because of the structures?</li> <li>• What is the major concern about each of the options</li> <li>• What solution does this group suggest for the problems with flooding in relation to the proposed options</li> <li>• What type of flood control or mitigation structure would this group want for their village, where should they be located in the village and why?</li> </ul>	

<p><b>Intended Benefits</b></p> <ul style="list-style-type: none"> <li>• Does this group perceive the same intended benefit of the demonstration project options?</li> <li>• What negative impacts does this group perceive (on agriculture, fisheries, environment)?</li> <li>• How will the different demonstration project options impact their present livelihood?</li> <li>• What changes in cropping, fishing or any other livelihood activity will this group make if the demonstration project option is implemented and why?</li> </ul>	
<p><b>Development Vision</b></p> <ul style="list-style-type: none"> <li>• What type of development does this group want to see in the village and why?</li> <li>• What additional support systems would be required to capitalize on the benefits of the demonstration project options – if this group is in favour of demo project options</li> </ul>	
<p><b>Future Participation</b></p> <ul style="list-style-type: none"> <li>• How does this group want to be engaged in flood control structural measure project in future?</li> <li>• What resource can this group bring to such a project</li> </ul>	
<p><b>Evaluation of Consultation</b></p> <ul style="list-style-type: none"> <li>• To what extent did the group understand the demonstration project options and their purpose?</li> <li>• What additional information does this group require to answer the questions in a better way?</li> </ul>	

**Appendix 3: List of Line Agencies Participants**

<sup>list</sup>  
The of Participants  
Capacity Building Training: Public Participation  
Period: May 26 to 29, 2009  
Location: Takhek and Se Bang Fai villages.

No.	Name and Surname	Position	Working place	Phone Number	Signature
1	Mr. [Handwritten]	[Handwritten]	[Handwritten]	5791188	[Signature]
2	Mr. [Handwritten]	[Handwritten]	[Handwritten]	2194320	[Signature]
3	Mr. [Handwritten]	[Handwritten]	[Handwritten]	28524109	[Signature]
4	Mr. [Handwritten]	[Handwritten]	[Handwritten]	5161094	[Signature]
5	Mr. [Handwritten]	[Handwritten]	[Handwritten]	5693869	[Signature]
6	Mr. [Handwritten]	[Handwritten]	[Handwritten]	6725097	[Signature]
7	Mr. [Handwritten]	[Handwritten]	[Handwritten]	5743945	[Signature]
8	Mr. [Handwritten]	[Handwritten]	labor S/W	5455303	[Signature]
9	Mr. [Handwritten]	[Handwritten]	labor S/W	2168071	[Signature]
10					
11					
12					
13					
14					
15					
16					

27.05.2009

**Appendix 4: Consultation by sub-groups within the 16 villages**



**Group 1**

**Riparian Village:**

Nonglom  
Thamuang  
Dan Pakse

**Hinterland village**

Nong Bok

**Facilitators:**

Khonphachan  
Soukkhy

Phonsao E		Sadeu		Sam Nadee	
Men	Women	Men	Women	Men	Women

**Vulnerability Analysis**

**What are the major hazards that the village has been**

Flood normally occurs during August to September

1 1 1 1 1

**How was this group of households affected by flooding and other hazards in the village?**

Rice crop destroyed (ha)

1 1 1 1 1 1

Road destroyed

1 1 1

Toilet disrupted

1 1 1

Irrigation canal destroyed

1 1 1

Cash crop destroyed (ha)

1 1 1 1 1

grazing land disrupted

1 1 1

Fishpond destroyed

1 1 1 1

Student absent from school

1 1

Spend money on repair houses and toilet

Spend money on repair irrigation canal

Spend money on repair houses

Spend money to repair temple

**How was this group able to cope with flooding and**

Traditional warning meter as a tree or made of stake on the

1 1 1

Move to temporary safety place

1 1 1 1 1 1

Move animals and collect grass for buffalo and cattle

1 1 1 1 1 1

Move pigs and spare animal feeds

1 1

Prepare spare man's food

1 1

Take a chance to fish for sale and household consumption

1 1

**What are the existing structures and systems for**

Nothing

1 1 1 1 1 1

Sand bags

0 0 0 0 0 0

**What is the livelihood for this group (e.g. rice, fishing,**

Wet paddy farmer

1 1 1 1 1 1

Dry paddy farmer

Crash crop farmer

1 1 1 1 1 1

Fishery

1 1 1 1

Small trader

1 1 1 1 1 1

Laborer

1 1

Phonsao E		Sadeu		Sam Nadee	
Men	Women	Men	Women	Men	Women

**Feed back on demonstration project options**

**Structural Measures**

**Which option is preferred by this group?**

From Nongbone to Dan Pakse to Dong Nasan

1 1 1 1 1 1

From Nongbone to Dan Pakse

1 1 1 1 1 1

**village or community because of the structures?**

Clash with neighbors

0 0 0 0 0 0

No clash at all

1 1 1 1 1 1

**What is the major concern about each of the options?**

Paddy land acquisition

1 1

Garden land acquisition

Residential land acquisition

1 1

Houses

Trees

**What solution does this group suggest for the problems with flooding in relation to the proposed options**

Compensation in cash

1 1 1 1 1 1

Compensation in land by land

0 0 0 0 0 0

Contribution

0 0 0 0 0 0

**What type of flood control or mitigation structure would this group want for their village, where should they be located in the village and why?**

Flood control gate

1 1

Drainage

1 1 1 1 1 1

Pumping station

**Does this group perceive the same intended benefit of the demonstration project options?**

As all the area will be free from flood:

1 1 1 1 1 1

Full paddy area, wet and dry will be utilized for cultivation

1 1 1 1 1 1

Irrigation facilities will be fully used

1 1

All lands can be used for diversified crops

Save time and labor from not to do with:

Maintenance of irrigation canals

1 1 1 1 1 1

House maintenance

Grazing land rehabilitation

1 1 1 1 1 1

Animal pen rehabilitation

1 1 1 1 1 1

Fishpond maintenance

Having large production rice

1 1 1 1 1 1

Having large production cash crop

Having large number of animals because of:

1 1 1 1 1 1

Availability of grazing area

1 1 1 1 1 1

Animals are free from diseases

Large production raised fish for sale as:

Fish ponds remain in good condition

Fish are not gone with water and growing very well

1 1 1 1 1 1

Having good diet as plenty of rice, fruit, vegetable, fish and

Large production rice for sale

1 1 1 1 1 1

Large production cash crop for sale

Large number of animals for sale as:

1 1 1 1 1 1

	Phonsao E		Sadeu		Sam Nadee	
	Men	Women	Men	Women	Men	Women
Availability of grazing area	1		1		1	
Animals are free from diseases		1	1	1	1	1
Have more time to earn income from selling labor						
Have good road with good transportation	1	1	1	1	1	1
Have good health and sanitation as:	1	1	1	1	1	1
Good drinking water supply		1		1		1
Good toilet	1		1		1	1
<b>What negative impacts does this group perceive (on</b>						
Loss of paddy land	1		1	1	1	
Loss of residential land		1	1		1	1
Loss of garden land	1	1		1		1
Loss o houses	1	1	1	1	1	1
Water will not drained well						
<b>How will the different demonstration project options</b>						
None	1	1	1	1	1	1
<b>What changes in cropping, fishing or any other livelihood activity will this group make if the demonstration project option is implemented and why?</b>						
From dry paddy to wet paddy	1		1	1		1
From wet paddy to fish ponds	1	1		1	1	1
From dry paddy to fish pond	1		1	1	1	1
From pig raising to fish culture	1	1	1	1		
From farmer to agriculture trader	1	1	1	1		1
<b>What type of development does this group want to see</b>						
Good road						
Good hospital with doctors and medication						
A village-group market						
Village funds						
<b>What additional support systems would be required to capitalize on the benefits of the demonstration project options – if this group is in favour of demo project</b>						
Credit with low interest						
<b>How does this group want to be engaged in flood control structural measure project in future?</b>						
Yes	1	1	1	1	1	1
<b>What resource can this group bring to such a project?</b>						
Land where structure site will be located	1		1		1	1
Earth for filling						
Poles						
Bamboo						
Labor	1		1		1	
Coordination	1		1		1	
<b>To what extent did the group understand the demonstration project options and their purpose?</b>	1					
Very well (100%)	1	1	1	1	1	1
Ok	1	1	1	1	1	1
Not well	0	0	0	0	0	0
<b>What additional information does this group require to answer the questions in a better way?</b>						
None	1	1	1	1	1	1

## **Appendix 6 Initial Environmental Examination**



## Lower Se Bangfai, Initial Environmental Examination

### SUMMARY AND CONCLUSIONS

During Stage 1 of the FMMP-C2, a report was prepared on the Potential development in Xe Bangfai area with the aim to investigate options for flood risk reduction and agricultural development. The proposed options flood protection emankments on both sides of the Lower Xe Banfai (downstream of the bridge on Road No. 13), a diversion canal and a storage reservoir. These options are currently considered as alternatives that are being investigated in the demonstration project for the development of an Integrated Flood Risk Management Plan for the Lower Xe Bangfai area in Stage 2 of FMMP-C2.

The alternatives are tested concerning their impact on the flooding hazard and flood damage reduction.

In parallel, a Public Participation Plan was prepared and is will be implemented in May – June 2009 in order to involve all stakeholder groups in this planning exercise to better understand and take into account their interests and point of views.

The alternatives developed in Stage 1 of FMMP-C2 constitute rather large-scale structural measures for flood risk reduction. The potential environmental impacts of the measures can be substantial, therefore this Environmental Examination report was prepared already at an early stage of the Demonstration Project preparation in order to guide and influence the technical analysis of these alternatives. It will also aid in developing other alternative measures that are likely at a smaller scale to possibly better suit the local social and ecological environment.

The Se Bang Fai Demonstration Project ideas consist of construction of flood protection dikes along the Se Bangfai River, downstream of the crossing with Road 13. Construction of drainage canals in the floodplain and construction of regulation structures in the small tributaries of the river is part of the project, as is the provision of irrigation infrastructure. Construction of a diversion channel may be an additional element to the project, as is possibly the construction of a flood storage reservoir in the Se Bangfai upstream of the Demonstration Project area, in combination with the construction of a control gate near the confluence of the river with the Mekong. The potential environmental impacts of implementation of the project are summarized briefly in the following.

The seasonally inundated Lower Se Bangfai floodplain is a sensitive and valuable ecosystem. It consists of a mosaic of fresh water lakes, river ponds, rice paddy and fresh water marshes. Close to the river there are several old river channels with oxbow lakes, that silted up and form fairly large marshes. Although not much is known about the flora and fauna species present in the area, it is to be assumed that these areas are important habitats for fish and water birds. The wetlands are also important as refuges for 'Black fish' in the dry season and as spawning and nursing areas for both 'Black' and 'White fish' in the flood season.

No officially protected areas are located in Xe Bangfai plain, however, BirdLife International on it's website mentions an Important Bird Area (IBA) located in the area. Details are not known at present.

Population in the project area is concentrated along the river and in villages located on the higher, old levees in the floodplain, where densities are considerable. The river is an important source of water for domestic use.

Paddy rice is the main crop in the area, while the banks of the Xe Bangfai River are intensively used for the production of fruits, vegetables and cash crops like tobacco. Fisheries is important in the flood season. It is a source of food and additional income for a substantial part of the population.

Reduced flooding in the Se Bangfai plain will have a number of significant environmental impacts. The area is at present a fairly important wetland area, which sustains a high biodiversity of flora and fauna, mainly water birds and fish. Reduction of the flooding will have a significant negative effect on the dry season refuge habitats, small lakes, ponds and marshes, which are important for the survival of floodplain fish. In the flood season, the flooded wetlands, forests and paddy fields are an important spawning and nursing area for both floodplain resident fish and migratory fish. It will be clear that fisheries in the area will reduce greatly if these habitats disappear, or cannot be reached anymore by migrating fish. If the objective of the project is reached by construction of a dam across the Se Bangfai, fish migration up and down the river will become impossible.

Other important impacts are related to the river bank gardening. River banks are cultivated intensively, mainly by women. The fruits and vegetables grown there are important for the diet, tobacco is important as cash generator. Land acquisition for construction activities may be considerable, and since population is concentrated on the riverbanks resettlement may also be substantial. Construction of a dam in the Xe Bang Fai will flood a large area and a number of villages.

From an environmental point of view making the Se Bangfai floodplain completely floodfree is not recommended. A flood protection systems that would allow controlled flooding of the area during the main flood period of the Mekong River would sustain the precious wetland ecology and the fisheries potential.

## TABLE OF CONTENTS

SUMMARY AND CONCLUSIONS	1
1 INTRODUCTION	1
1.1 Purpose of the report	1
1.2 Extent of the Environmental Examination	1
1.3 Contents of the report	2
2. DESCRIPTION OF PROJECT OPTIONS	3
3 THE LEGAL AND POLICY FRAMEWORK	7
4 DESCRIPTION OF THE ENVIRONMENT	10
4.1 Physical Resources	10
4.2 Ecological resources	16
4.3 Socio-Economic Development	20
4.4 Social and Cultural Resources	27
6 IDENTIFICATION AND ASSESSMENT OF THE POTENTIAL ENVIRONMENTAL IMPACTS	31
6.1 Introduction	31
6.2 Impacts and mitigating measures related to project siting	31
6.3 Potential impacts related to project implementation and construction activities	33
6.4 Potential negative impacts related to project design, management, operation and maintenance	38
6.5 Positive impacts related to project design, management and operation and maintenance	40
REFERENCES	43





# 1 INTRODUCTION

## 1.1 Purpose of the report

During Stage 1 of the FMMP-C2, a report was prepared on the Potential development in Se Bangfai area with the aim to investigate options for flood risk reduction and agricultural development. The proposed options flood protection embankments on both sides of the Lower Xe Ban Fai (downstream of the bridge on Road No. 13), a diversion canal and a storage reservoir. These options are currently considered as alternatives that are being investigated in the demonstration project for the development of an Integrated Flood Risk Management Plan for the Lower Xe Bangfai area in Stage 2 of FMMP-C2.

The alternatives are tested concerning their impact on the flooding hazard and flood damage reduction.

In parallel, a Public Participation Plan was prepared and is will be implemented in May – June 2009 in order to involve all stakeholder groups in this planning exercise to better understand and take into account their interests and point of views.

The alternatives developed in Stage 1 of FMMP-C2 constitute rather large scale structural measures for flood risk reduction. The potential environmental impacts of the measures can be substantial, therefore this Environmental Examination report was prepared already at an early stage of the Demonstration Project preparation in order to guide and influence the technical analysis of these alternatives. It will also aid in developing other alternative measures that are likely at a smaller scale so to possibly better suit the local social and ecological environment.

## 1.2 Extent of the Environmental Examination

This report presents the results of the Environmental Examination of one of the Demonstration Projects, the Integrated Flood Risk Management Plan for the Lower Se Bang Fai area, proposed within the framework of the Flood Management Mitigation Program, Component 2, Structural Works and Flood Proofing, Stage 2 Implementation. The Assessment was carried out applying, and at the same time testing, the Best Practice Guidelines for Integrated Flood Risk Management Planning and Impact Evaluation, Environmental Evaluation, developed under the FMMP-C2 project.

The examination was carried out in April-May 2009 by Royal Haskoning of the Netherlands and associates. The current study of the Se Bang Fai Focal Area Project in the Khammouane and Savannakhet Provinces of Lao PDR is based on very limited field studies. As such, the study had to rely heavily on secondary data, as well as data collected during the social survey.

The Se Bangfai project area is located in the MRC Basin Development Plan (BDP) Sub-area 4L. The yearly flooding area is located along the lower Se Bang Fai river. To the west the area is bounded by the Mekong River, to the east, Road nr 13 forms the boundary shows the location of the project area.

**Figure 1** Location of the Se Bang Fai project area

Source: Nam Theun-2 Power Company, 2005b

### 1.3 Contents of the report

The results of the study are presented in the general format of an environmental impact assessment as presented in the Best Practice Guideline. Following this introduction, the balance of the report addresses the following topics:

- Chapter 2 gives a description of the project and the distinguished project alternatives. The type of project is discussed, as well as the need for the project. Besides the size and magnitude of the operation and the proposed schedule for implementation receive attention;
- Chapter 3 briefly addresses the (Lao) legislative framework of EIA;
- Chapter 4 describes the environment, not only the physical resources (topography, soils, climate, surface water, and ground water), but also the ecological resources (aquatic biology, wildlife, forests and rare endangered species), the human and economic development in the project area (population and communities, industries, infrastructural facilities, transportation, land use, fisheries and agricultural development), and the quality of life values (socio-economic values, public health);
- Chapter 5 discusses the environmental screening of the project, summarized in a screening table;
- Chapter 6 describes the potential environmental impacts of the project as well as a first assessment of their significance. Possible measures to mitigate the adverse impacts of the project or to enhance the distinguished positive impacts are addressed as well. Not only environmental problems due to the project location are discussed, but also impacts related to implementation and construction activities, as well as impacts that could arise during the project's operational phase; and

## 2. DESCRIPTION OF PROJECT OPTIONS

The Se Bang Fai floodplain, downstream of the crossing with Road 13, experiences flooding problems during the rainy season nearly every year. According to a 36 years statistical record, there was flooding in 31 years.

Four districts in the Khammoune Province, Thakhek, Nongbok, Mahaxay and Sebanfai, are prone to flooding, as well as 1 district in Savannakhet Province: Xayboully. More than 80% of the flooding is caused by overflow from the Se Bang Fai River. A second cause of flooding is improper drainage of the area after heavy rain. Drainage canals and other infrastructure (gates) to discharge the water out of the area into the Se Bang Fai or the Mekong River are absent or in a poor condition. Finally, backwater of the Mekong River occasionally causes indirect flooding in the area. When the water in the Se Bang Fai River exceeds a certain water level, backwater from high discharges in the Mekong River cause a reverse flow and flooding of up to 1.5 meters occurs in the lower areas. Flooding depths are thought to increase with about 20 cm, once Nam Theun-2 becomes operational. Flooding generally starts between the end of July and September, and normally last between 15 and 30 days. Most of the area flooded is used for agricultural purposes.

Three project alternatives have been developed to reduce the flooding in the area (Vongvixay, 2008):

- Providing full protection to the area by means of polder development;
- Providing full protection to the area by means of polder development, in combination with construction of a flood diversion canal; and
- Construction of a flood storage reservoir in the Se Bang Fai at the confluence with the Se Noy, just upstream of the Road 13 crossing, combined with construction of a flood gate in the Se Bangfai mouth.

**Figure 2** Location of the Nongbok, Se Bang Fai and Xayboully Districts



Source: Nam Theun-2 Power Company, 2005b


### **Alternative 1: polder development**

The construction of dikes along the Se Bang Fai and the Mekong River will be carried out in 3 phases, see Figure 2. In phase 1 a dike between Banne Nongbone in the Sebangfai District and Banne Sokbo in the Nongbok District (27 km) will be constructed

along the right bank of the Se Bang Fai. Four new control gates have to be constructed in tributaries that discharge to the Se Bang Fai in this river stretch. Besides, four pumping stations and a 3 km long drainage canal have to be constructed.

After completion of this phase 9,700 ha land and 26 villages are protected against flooding.

**Figure 3 Lay out of the polder construction alternative**

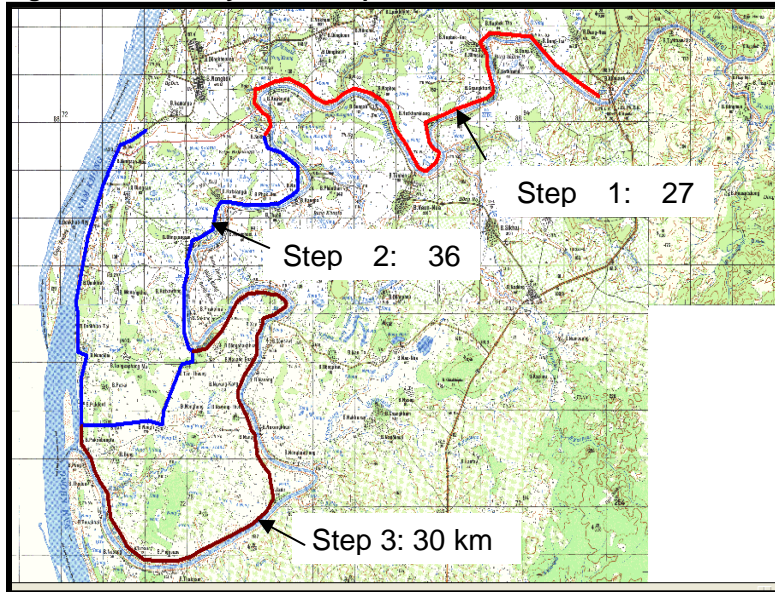

Source: Vongvixay, A., 2008, Potential development in Xe bang Fai (XBF)

In phase 2 the dike will be extended over a length of 36 km from Banne Sokbo to Banne Bungsanetha. Four new control gates have to be constructed and 5 control gates have to be repaired next to the construction of 9 pumping stations and 5 km drainage canals. After phase 2 an additional 4,000 ha and 17 villages will be flood proof.

In the final phase 3 another 30 km of dike will be constructed between Banne Tantheung and Banne Dannepakse in the Nongbok District. One control gate will be constructed and one gate will be repaired. In this phase also 2 pumping stations and 3 km drainage canal have to be constructed. Phase 3 will provide protection against flooding for an area of 3,000 ha including 13 villages.


Table 1 gives a summary of the works to be carried out.

**Table 1 Summary of works to be carried out and protection provided for the polder construction alternative**

No	Project component	Phase 1	Phase 2	Phase 3	Total
1	Dike construction	27 km	36 km	30 km	93 km
2	Construction of new control gates	4	4	1	9
3	Repair of existing control gates	0	5	1	6
4	Construction of pumping stations	4	9	2	15
5	Construction of drainage canals	3 km	5 km	3 km	11 km
	Area protected	9,700 ha	4,000 ha	3,000 ha	16,700 ha
	Villages protected	26	17	13	56

It is also considered to construct a protection dike along the right bank of the Se Bang Fai only (Alternative 1a). The dike runs between Banne Nongbone in the Se Bang Fai District and Banne Danpakse in the Nongbok District and has a length of 65 km (See Figure 3). For this alternative 9 new control gates have to be constructed and six existing gates have to be repaired. At four locations drainage canals have to be constructed.

**Figure 4** Layout of Alternative 1a, dike construction along the right bank of the Se Bangfai only

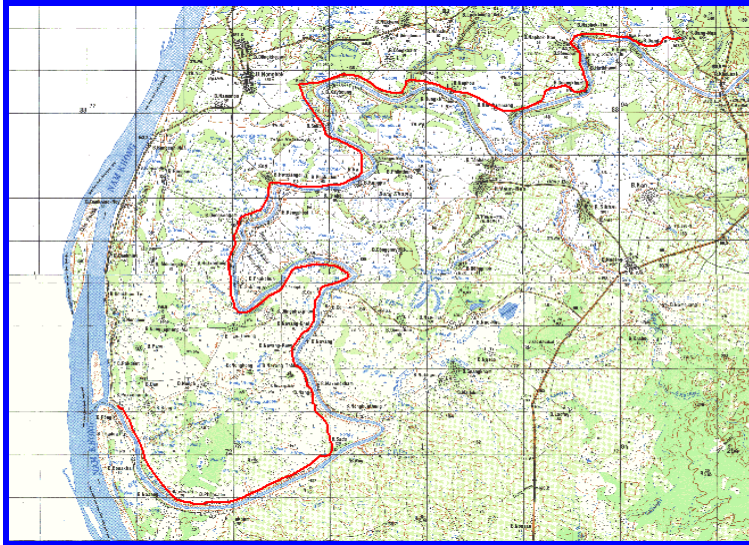


Source: Vongvixay, A., 2008, Potential development in Xe bang Fai (XBF)

#### **Alternative 2: Polder development combined with flood diversion**

This Alternative is actually an extension of Alternative 1, the polder development. Additional to the Alternative 1 components a diversion channel with a bed width of 20 m and a length of about 8 km will be constructed to divert water from the Se Bangfai near Banne Sokbo (about 35 km upstream of the confluence with the Mekong River) to Banna Bungsan Nua along the Mekong. Two possible lay outs for this so-called Selat canal have been distinguished, see Figure 4. The bed elevation will be 138.0 m amsl.

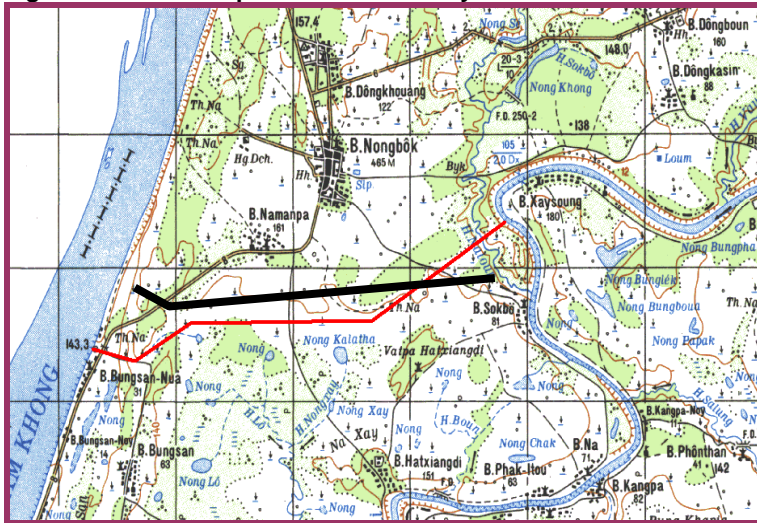

**Figure 5 Proposed alternative lay outs of the Selat Diversion**


Source: Vongvixay, A., 2008, Potential development in Xe bang Fai (XBF)

### Alternative 3: Construction of a flood storage reservoir in the Se Bang Fai at the confluence with the Se Noy

This alternative entails the construction of an earthen regulation dam in the Se Bang Fai just downstream of the junction with the Se Noy River. The dam will be multi-purpose: in the wet season flood waters of the Se Bang Fai will be stored, thus protecting the downstream area against flooding, in the dry season the stored water will be used for irrigation. Since part of the flooding in the Se Bang Fai plain is caused by Mekong water flowing into the river channel, construction of a regulation dam will only be effective if it is combined with construction of a control gate in the Se Bangfai at the confluence with the Mekong River. Two alternative lay outs of the scheme have been designed, the details are given in

Table 2.

Table 2 Main characteristics of the proposed flood storage reservoir

	Alternative 3a	Alternative 3b
Height of dam	25 m	30 m
Length of dam	200 m	450 m
Normal reservoir level	145 m amsl	150 m amsl
Reservoir surface	10,500 ha	-
Average water depth	8.0 m	-
Reservoir capacity	840 x 10 <sup>6</sup> m <sup>3</sup>	1,500 x 10 <sup>6</sup> m <sup>3</sup>
Flood protected area	92,910 ha	150,000 ha
Irrigated area	22,200 ha	33,200 ha

### 3 THE LEGAL AND POLICY FRAMEWORK

#### 3.1 EIA legislation and institutional setting

Review of collected information on EIA in Lao PDR and discussions at the EIA Division, Water Resources and Environment Authority (WREA), Department of Environment in Vientiane revealed that EIA regulations date back to 2000 and have been drafted with SIDA support. They are presently being revised, again with SIDA support (phase 2 of the project, lasting till 2010). Three EIA stages are applied: Screening, Initial Environmental Examination (IEE) and EIA. Development of sectoral guidelines is the responsibility of the sector ministries themselves. Until now specific guidelines have only been made for hydropower projects, road development and mining projects. Under the new decree (not yet enforced) the recently established WREA becomes responsible for the drafting of guidelines. Drafting of a specific guideline for flood protection works is not foreseen at the moment.

EIA legislation is laid down in the Regulation on Environment Assessment of the Lao PDR Decree No. 1770 (2000). The decree consists of 4 parts and 18 articles. It provides guidelines and standards for environmental assessments and a framework within which other ministries can develop their own set of standards and guidelines for EIA procedures. The EIA Decree stipulates that “No construction or other physical activities shall be undertaken at a project site until an environmental compliance certificate for the project is issued.” Types or sizes of projects which do or do not require EA is presently not specified. In the current practice the Development Project Responsible Authority (DPRA) reviews projects (based on their description) on a case by case basis and determines whether EA is required. The decision has to be approved by the EIA Division of WREA.

WREA was established under the Prime Minister Office in 2007. It comprises of the following units/departments: Department of Environment, Environmental Research Institute (which both were formerly part of the Science, Technology, and Environment Agency (STEA)), Department of Water Resources, Department of Metrology, and the Lao National Mekong Committee Secretariat. In August 2008, the Division of Environmental Impact Assessment under the Department of Environment became the Department of Environmental and Social Impact Assessment (ESIAD).

WREA is the principal Government agency for formulating and guiding environmental policy in Lao PDR. It develops environmental strategies, policies, regulations, programs and projects, implements Environmental Impact Assessment and monitoring and conducts research and training activities.

ESIAD is responsible for reviewing EA reports submitted by DPRA, issuing Environmental Compliance Certificates to project proponents and monitoring the project according to the Environmental Management Plan, which is part of EA report.

The EA process in Lao PDR can be summarised as follows:

- Prepare a description of the project and submit for screening;
- Screening of the project and determination whether an EA is required or not;



- If EA is required, an Initial Environmental Examination (IEE) is prepared including:
  - An Environmental Management Plan (EMP) if the IEE determines that no further EA is required; or
  - A ToR for an EIA if the IEE determines that further EA is required;
- Review of the IEE and EMP or ToR. If the IEE is sufficient and the EMP acceptable, a Environmental Compliance Certificate is issued. If the IEE and ToR for an EIA are sufficient, the project proponent can proceed with the preparation of the EIA. If the IEE is insufficient, it must be revised;
- Preparation of the EIA and EMP;
- Review of the EIA and EMP: if they are acceptable, an Environmental Compliance Certificate will be issued (with conditions if necessary); if they are unacceptable, the project will either be rejected or WREA will request that the EIA be revised and resubmitted;
- Implementation of the EMP; and
- Project monitoring and evaluation.

The Environmental Protection Law of 1999 requires each sector Ministry to issue its own procedures on Environmental Impact Assessment, based on WREA regulations.

Other relevant legislation is given in the Decree on the Compensation and Resettlement of the Development Project. This decree defines principles, rules, and measures on compensation and resettlement resulting from development projects. It stipulates in article 6 that 'project owners shall compensate project affected people for their lost rights to use land and for their lost assets (structures, crops, trees and other fixed assets) affected in full or in part, at replacement cost'. Of importance is also the Wildlife and Aquatic Animals Law, this law provides principles and measures to protect and manage wildlife and aquatic animals. The law lists endangered species and states that habitat of those species needs to be protected.

Cumulative and/or transboundary assessment is not mentioned in the available documentation. However, in the National Mekong River Committees (NMRC's) of the four Lower Mekong Basin (LMB) countries it is realized that environmental effects do not respect political boundaries, certainly not in river basins. Sustainable development is high on the agenda and transboundary impacts of developments in the basin should be prevented. National environmental assessment legislation and procedures do not provide a framework for evaluation of transboundary impacts; therefore development of a common procedure could enhance cooperation and prevent disputes. MRC is committed to develop such a common approach.

The draft version of the Framework for Transboundary Environmental Impact Assessment (TbEIA, March 2006), developed by MRC for the Lower Mekong Basin, list the following projects as having potential transboundary impacts:

- Hydropower projects;
- Irrigation schemes;
- Ports and riverworks;
- Industrial and mining projects;
- Aquaculture projects;
- Navigation projects; and

- Water abstraction projects for water supply.

This implies that flood protection dikes and dams are considered as potentially having transboundary impacts. Flood management and industrial water supply projects were originally on the list as well, but have been removed, since flood issues and industrial water supply are considered national issues.

### **3.2 Wetland management policy**

In Lao PDR there are numerous policies that refer to various aspects of the use and management of wetlands and related resources. Such policies generally exhibit two central features. The first is the explicit links between development, conservation, and poverty alleviation. The second is the constitutional right of access to natural resources by the Lao people and state, and their obligation to protect and use these resources sustainably.

A number of government organizations are involved in the management of wetland resources, and there is no formal framework for the coordinated management of wetlands in Lao PDR. The Ministry of Agriculture and Forestry has overall responsibility for the management of wetland resources, including agriculture and conservation, while other ministries have interests in wetlands as they relate to transport, construction, or electricity production. This distribution of responsibilities and interests highlights the division between agencies responsible for sustainable management of wetlands and those responsible for extractive uses.

The Lao PDR government recognizes the importance of international cooperation in environmental protection and is a signatory to a number of environmental agreements, including the 1992 Convention on Biological Diversity and the 1995 Mekong Agreement. The government is currently deliberating whether or not to become a signatory to the Ramsar Convention. The main difficulty in ratifying that Convention stems from the perception that Ramsar is primarily focused on the preservation of wetland resources through the exclusion of resource users, which comes into conflict with the Lao PDR constitutional right of access to natural resources.

## 4 DESCRIPTION OF THE ENVIRONMENT

The description of the environment in the Se Bang Fai Focal Area is mainly based on data given in the Basin Development Plan of the MRC (MRC, 2006), the Feasibility Study of Floodway and small structures (Mekong Secretariat, 1981), and the Social Development Plan, Volume 3, Downstream Areas, and the Environmental Assessment and Management Plan of the Nam Theun 2 Hydropower Development Project (both published by the Nam Theun-2 Power Company, March 2005).


### 4.1 Physical Resources

#### 4.1.1 Topography and General Characteristics

The Se Bang Fai has a catchment area of about 10,240 km<sup>2</sup>. The river takes its rise in the Annamite mountain range near to the border with Vietnam, west of Thakhek and joins the Mekong at km 1,166, opposite of the city of That Phanom in Thailand. The Se Bang Fai has a number of tributaries, the largest of these, the Se Noy, joins the Se Bang Fai just upstream of Road 13. The catchment area upstream of the bridge is 8,560 km<sup>2</sup>, which is 84% of the basin.

The upper basin is steep, but downstream of Mahaxai the river slopes are small and the reach from 10 km downstream of Mahaxai to the mouth is affected by backwater from the Mekong. In this lower reach the river strongly meanders in sandy alluvial deposits. Figure 6 shows the catchment.

Figure 6 The Se Bang Fai catchment

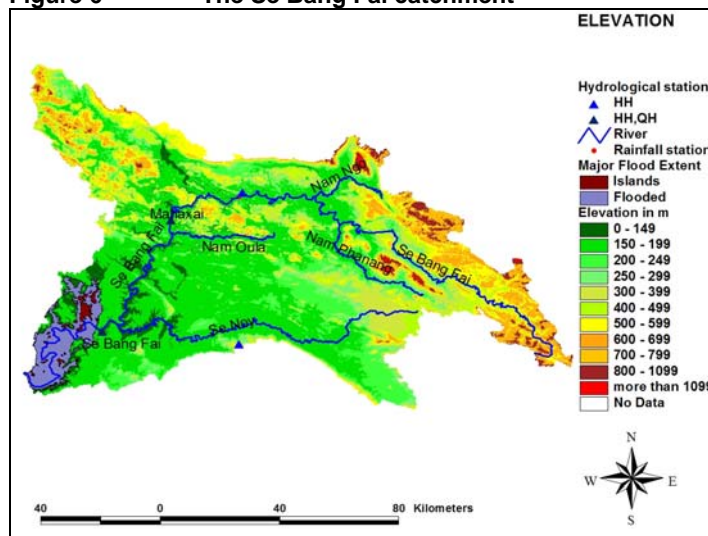

The Se Bang Fai catchment downstream of the bridge on Highway 13 is called the Se Bang Fai Plain. The plain is about 15 km wide, bounded by the Mekong River to the west and upland forest on an old alluvial terrace to the east. The area is approximately 500 km<sup>2</sup> from the confluence with the Mekong up to the Road 13 crossing. The length of the river in this stretch is approximately 70 km. The area is fairly densely populated with

some 60 villages and about 400 km<sup>2</sup> of rice paddy fields. It is a major area of rice production for the Khammouane Province.


The Se Bang Fai is currently eroding, with slumping visible along its banks, generally as a result of either toe scour and undermining, or excess pore pressures as the water falls in the dry season. The banks of the river are generally 135 to 160 m apart, although the channel width locally exceeds 200 m. A trend of widening of the Se Bang Fai channel has been observed over the period 1995 to 2002 based on a comparison of bench marked cross-sections.

The topography of the Se Bang Fai plain downstream of Road 13 is rather flat. Along the river narrow natural levees have developed, further from the river the area consists of low lying basins, old river channels with oxbow lakes that have silted up, separated from each other by relatively high lying old river levees. To the east the floodplain is bounded by a higher lying old alluvial terrace. Most of the flood plain has an elevation of less than 140 m amsl, and floods frequently. The natural levees along the river and in the floodplain have a somewhat higher elevation and are less frequently and less deep inundated.

#### 4.1.2 Soils

All soils in the project area are of alluvial origin. Four soil types can be distinguished: a narrow strip of Plinthosols and Leptosols along the Mekong River bank and Luvisols and Lixisols in the lowlying floodplain. The Plinthosols, Leptosols and Lixisols are characterized by a low fertility. The Luvisols are generally suitable or intensive agriculture, since they are more fertile and easy to cultivate.

**Figure 7** Soils in the project area

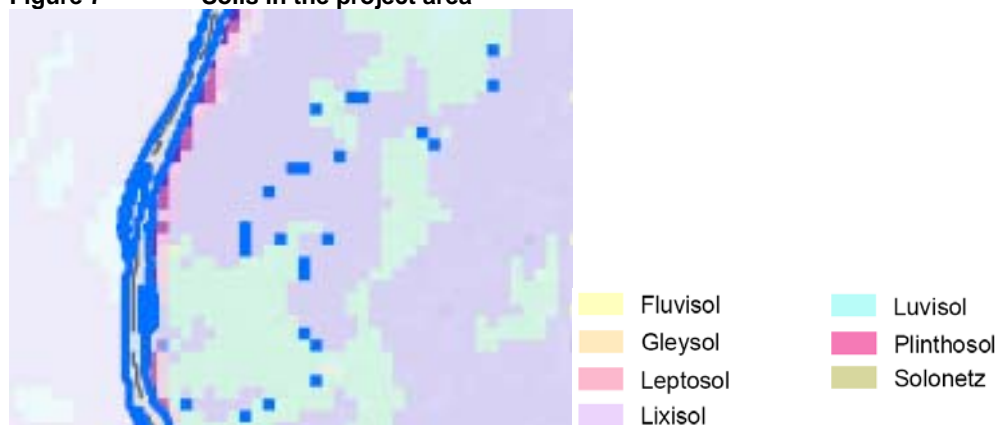

Source: MRC Basin Planning Atlas, Sub-area 4L, 2006

The soils of the natural levees have developed in relatively coarse sediments deposited by the floods, the surface texture ranges from sand to silty loam. The texture of the soils in the floodplain is finer, generally very fine silty loam is encountered. Most of these soils are acidic and have a low cation exchange capacity.

### 4.1.3 Climate

The climate of the Se Bang Fai catchment is influenced primarily by the seasonal southwest and northeast monsoons, the shift of the Intertropical Convergence Zone (ITCZ) and tropical cyclone disturbances such as tropical storms and tropical depressions.

The southwest monsoon (wet season) normally effects the catchments from mid May to early October and is predominant when atmospheric pressure is low over Asia. This is a period of frequent and heavy rainfalls. However, rainfall during the wet season usually has a bimodal distribution, with a short dry period of one to two weeks, usually between June and July. After this period rainfall becomes more frequent, including heavy storms which result from tropical cyclones entering the region from the South China Sea, mostly during September and November. Flooding frequently occurs when two or more of these storms occur in succession or when the ITCZ passes into one of its more active stages, with tropical cyclones following shortly thereafter.

A transition period, from mid October to early November, is followed by the dry northeast monsoon (cold season) which normally lasts from October to February. This season is characterised by sparse, relatively light rainfall, lower temperatures and lower humidity. The northeast monsoon is followed by another transition period to the hot season from March to early May, that is characterised by increasing temperatures, rainfall and humidity. This transition is slower than the transition from the wet to the cold season.

A long rainfall record is available for station That Phanom, opposite the junction of the Se Bang Fai with the Mekong. As can be observed from


Table 3, the long term annual rainfall for this station amounts 1,560 mm, varying from 890 to 1940 mm. About 87 % of the annual rainfall occurs during the South-West Monsoon from May to September, with highest rainfall on average in August, see also

**Figure 8.**

**Table 3 Monthly rainfall statistics and evaporation (ETo) in mm around Lower Se Bang Fai**

Variable	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
Average	3.1	20.7	43.4	79.1	200.3	274.8	276.6	350.6	250.3	54.7	4.8	1.2	1559.5
Min	0.0	0.0	0.0	5.0	53.1	120.0	88.2	121.9	20.9	0.0	0.0	0.0	890.7
Max	31.3	161.7	150.9	226.4	377.1	516.8	542.8	758.8	538.1	257.9	58.3	27.6	1940.6
Evap.	122	122	156	162	150	124	127	120	112	129	128	121	1572

**Figure 8 Monthly rainfall statistics of station That Phanom, Period 1966-2005**

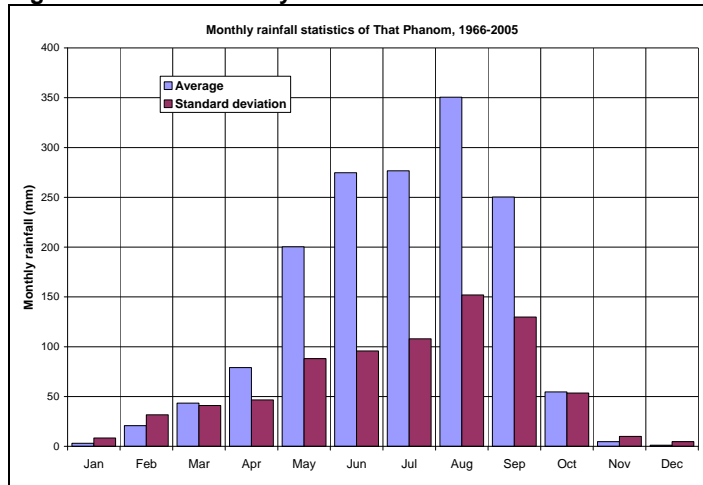

Monthly average daily reference evapotranspiration rates (ETo) are also given in

Table 3. They have been taken from the Climwat-database of FAO. During the flood season an average daily evapotranspiration rate of about 4 mm/day or 120 mm per month is observed. During these months the rainfall exceeds the evaporation by far, whereas from October to April there is a water deficit.

Mean relative humidity at Nakai Tai station is below 70% during the dry season, and exceeds 80% in the wet season, peaking at a mean of 89% in July. Relative humidities near 100% can occur in the early mornings at any time of the year.

Temperatures are lowest in the months November until February and peak in April before the onset of the south-west monsoon in May. Mean temperatures at Nakon Phanom, along the Mekong in Thailand, vary from 21.9° C in January to 28.8° C in April, with an annual mean of 25.9° C.

#### 4.1.4 Hydrology and flooding

The frequency curves and extremes of the daily discharges of the Se Bang Fai at Mahaxai indicate that in the period from July till early October high discharges can be expected on the Se Bang Fai. The hydrograph of a single year shows distinct sharply rising and falling limbs. From the frequency curves of the daily average water levels of the Mekong at That Phanom near the Se Bang Fai river mouth it is observed that these peaks are likely to coincide with high water levels on the Mekong. The flood levels in the Lower Se Bang Fai are a function of the river discharge and the water levels in the Mekong. When the water surface in the Se Bang Fai exceeds a certain level, usually late in the rainy season, backwater from high Mekong River discharges causes the flow in the river channel to be reversed and flooding takes place through the tributaries and overtopping of the river banks. To prevent flooding from tributaries flood gates have been installed in many of these. Most of these flood gates are poorly designed, i.e. they only open one way, and are poorly maintained. As a result the low lying areas flood nearly every year to up to 1.5 meter.

The districts most effected by flooding are Thakhek, Nongbok, Se Bang Fai and Mahaxai. Major flooding takes place between the Mekong and Road 13, north of the Se Bang Fai River, where flooding may last for several months in the areas below 140m amsl. Nongbok village is flood free at an elevation of 150 m amsl. South of the Se Bang Fai in Savannakhet Province flood protection is already in place.

Apart from the area west of Road 13 and north of the Se Bang Fai there is also one smaller area in Mahaxai District facing floods according to local information. This area is located near Road 1F between Mahaxai and Nam Oula, and is flooded each year during about one week.

After completion of the Nam Theun-2 project, diversion of water from the Nam Theun/Nam Kading into the Se Bang Fai will result in an increase of the average annual discharge of the lower Se Bang Fai with an estimated 220 m<sup>3</sup>/s. However, it is expected that this will not greatly effect he flooding pattern, since the reduced flows of the Nam Theun/Nam Kading into the Mekong river will result in a fall of about 15 cm of the Mekong water levels during flood events. This should allow for quicker drainage of the lower Se Bang Fai during times of flooding, and consequently partially offset the impact of the increased flows in this portion of the river.


**Figure 9** shows the area prone to flooding in the lower Se bang Fai catchment.

#### 4.1.5 Water quality

In general, the water quality of rivers within the Lao PDR is considered to be good. The level of oxygen is high and the nutrient concentration is low. Due to rapid demographic growth, socioeconomic development and urbanization, however, water quality is deteriorating. It is common practice to dispose litter and sewage to water courses and drainage channels. As a result, the surface water is invariably contaminated with faecal matter from latrines and coliforms from septic tank effluent.

**Figure 9**            **Flood prone area in the lower Se bang Fai catchment**



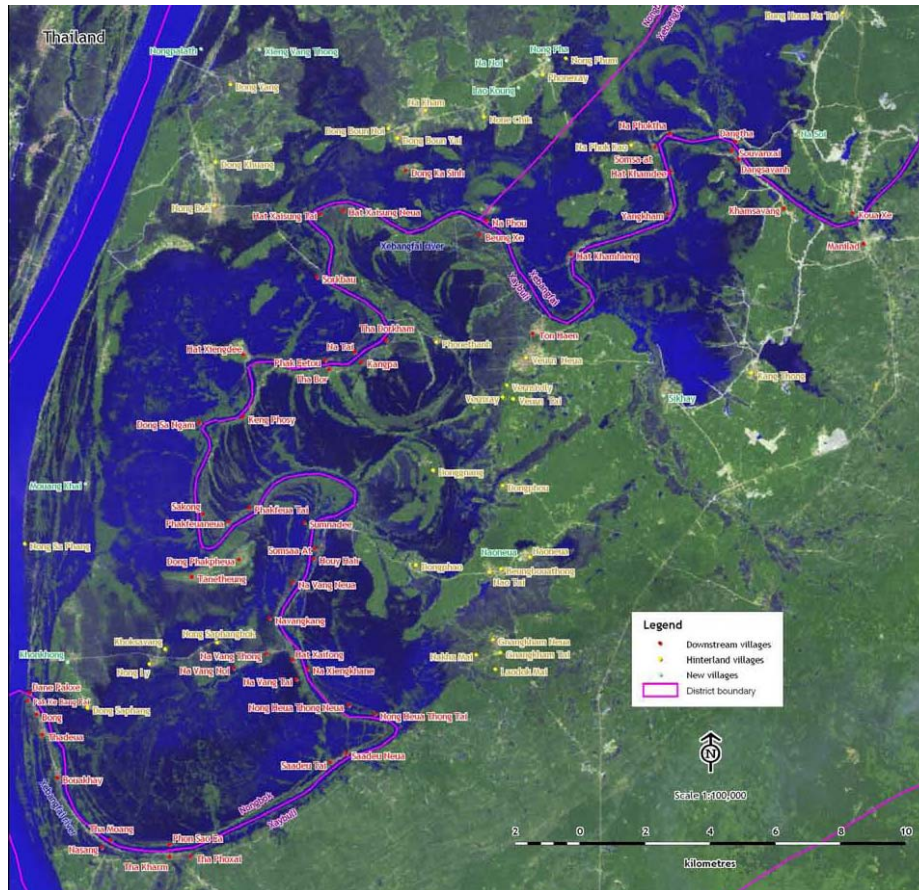

Source: Nam Theun-2 Power Company, 2005b

The water quality monitoring network of the Mekong River Commission measures water quality parameters in the Se Bang Fai at the bridge of Road 13 on a monthly basis since June 1985.

**Table 4** shows the summary results for the period June 1985 - December 2003. Information on bacterial pollution is not given.

Large parts of its course the Se Bang Fai flows through a limestone area, as the result the river water is slightly basic. Fairly low values of Dissolved Oxygen (DO) are observed after heavy rainfall and when water recedes from the floodplains and paddy fields. During these periods, also high Chemical Oxygen Demands (COD) are observed. Apart from occasional periods during the rainy season, when DO and COD concentrations do not meet Thai Class 2 surface water quality standards, the water quality of the Se Bang Fai is quite good (MRC, 2007, Diagnostic study of water quality in the Lower Mekong Basin).

Maximum values of Total Suspended Solids (TSS) as high as 386 mg/l have been measured during the rainy season. Median values range between about 125 mg/l in the wet season to less than 25 mg/l in the dry season.

**Table 4 .Water quality observations in the lower Se Bang Fai, June 1985 - December 2003**

Parameter	Unit	Maximum	Mean	Minimum	Standard for 'Good' water quality*
Temperature	°C	33.0	26.5	21.0	-
pH		8.82	7.81	6.38	6.0 – 8.5
TSS	mg/l	386	50	0	<25
Conductivity	mS/m	36.00	27.05	10.90	<30
Ca	meq/l	3.17	1.95	0.75	-
Mg	meq/l	1.38	0.52	0.03	-
Na	meq/l	0.543	0.093	0.016	-
K	meq/l	0.089	0.021	0.003	-
Alkalinity	meq/l	3.553	2.318	0.499	-
Cl	meq/l	0.318	0.035	0.001	-
SO <sub>4</sub>	meq/l	2.461	0.160	0.006	-
Total-Fe	mg/l	0.934	0.090	0.005	-
(NO <sup>3+</sup> NO <sub>2</sub> )-N	mg/l	1.152	0.103	0.001	-
NH <sub>4</sub> -N	mg/l	0.480	0.027	0.000	-
PO <sub>4</sub> -P	mg/l	0.162	0.008	0.000	-
Total-P	mg/l	0.147	0.017	0.000	<0.2
Si	mg/l	9.70	4.30	0.98	-
DO	mg/l	9.93	7.48	4.21	>6
CODMn	mg/l	6.2	0.9	0.0	<7

\* Standards for 'Good' quality given by MRC (Source: MRC, 2007, Diagnostic study of water quality in the Lower Mekong Basin. MRC Technical Paper No. 15

#### 4.1.6 Ground water

Groundwater serves as a source for domestic (drinking) water to the local communities. After the completion of Nam Theun 2 flows in the Se Bang Fai will increase as will groundwater levels adjacent to the river. Increases would be most notable in the dry season, when the Nam Theun contributions would proportionally be largest in terms of the total discharge to the river.

There is little information available on groundwater quality in Lao PDR, even though it is the main source of rural water supply. No systematic monitoring of impacts of fluoride, pesticides, nitrate from fertilizers and other chemical pollutants is carried out. Arsenic contamination is not considered a high risk in Lao PDR. Groundwater surveys carried out in 2002/2003 in 7 Southern Provinces showed that only one percent of the 680 wells tested had levels over the current drinking water quality standard for Lao PDR of 0.05 mg/l. Bacteriological contamination of groundwater often occurs, due to poor construction and maintenance of sanitation facilities around water sources, and results in water-borne diseases.

## 4.2 Ecological resources

### 4.2.1 Aquatic habitats and fish

A survey for the whole of Lao PDR yielded 203 fish species in 1974, the list had grown to 481 species by 2001 (Kottelat, M (2001). Fishes of Laos. Wildlife Heritage Trust, Colombo, Sri Lanka. 198 pp) after five exploratory surveys. Even with Kottelat's significant contribution to the increase in knowledge of fish distribution in Lao PDR, information on fish distribution, biology and ecology remains basic.

The main dry season fish habitat types in the lower Se Bang Fai river and floodplain are pools and slow water stretches in the river and swamps and stagnant pools on the floodplain. The river bed is characterised by a muddy to sandy bottom, with occasional rocky outcrops and rapids. The water is turbid, although compared to most other lowland streams in the Mekong basin it is still clear, with a visibility of about 50 cm. The depth is variable, from several metres to a few centimetres on some sandbars.

During the wet season, most of these habitats change completely and some are displaced to other areas. In this period fish populations frequently use habitats that are not available during the dry season for spawning, incubation of eggs, and rearing of fry. In the lower Se Bang Fai basin, flooded areas are important as nursery grounds and refuges for juvenile fish.

One hundred and thirty-one species have been observed in the Se Bang Fai, sixty-seven (67) of these in the lower Se Bang Fai. No endemic species were recorded in the latter stretch. The fish fauna of the lower and middle Se Bang Fai can clearly be described as a middle Mekong fauna. According to Kottelat and Whitten, 1996, the standing stock ranges between 6 and 23 kg per hectare. This is considerably less than what can be expected considering the high nutrient concentrations. This could be the result of fishing activities by local fishermen and because samples were taken during the dry season when few fish from the Mekong were in the river to spawn. Abundance was lowest at Dan Pakse at the confluence with the Mekong. Monthly variations in abundance along the river channel reflect seasonal migratory behaviour of fish. Most of the catch consists of medium size cyprinids (*Puntioplites* spp, *Hypsibarbus* spp, *Barbodes* spp, *Labeo chrysophekadion*, *Puntius orphoides*). Catfishes (*Pangasius siamensis*, *Clarias batrachus*, *Mystus wyckioides*, *Hemibagrus nemurus*) and snakehead (*Channa striata*) are less important.

Three geographically-defined fish migration systems exist in the Mekong Basin: the lower, middle and upper Mekong migration system, the Se Bang Fai basin falls within the middle Mekong migration system. Within this river section floodplain spawning and nursery habitats are associated with the tributaries. Adults and juveniles spend the dry season in deep refuge pools in the mainstream channel. At the onset of the wet season, they migrate upstream along the Mekong until they encounter a tributary, and then swim up the tributary until they encounter floodplain habitat or other possibly suitable spawning habitat. Many species spawn only once, soon after arriving on the floodplain, while others spawn several times during the flood season, and a few others spawn only once at the end of the wet season or beginning of the dry season. The fry grow out on the floodplain which acts as a nursery and contains rich forage. As the flood water begins to recede from the floodplain, adults and juveniles migrate back in the tributaries and move downstream to the Mekong. There are over thirty medium and large size species of cyprinid and pangasiid catfish which exhibit this general migration pattern. The first major fish migration of the year commences at the beginning of the wet season. At that time, according to villagers, a large number of fish species begin migrating up the Se Bang Fai, and its larger tributaries, while other fish species are believed to move from deep-water pools to spawning areas in the Se Bang Fai.

These two migrating groups include the following taxa: Cyprinids (*Labeo chrysophekadion*, *Labiobarbus* sp., *Sikukia gudgeri*, *Hypsibarbus* sp., *Puntioplites* sp.), Catfish (*Pangasius larnaudii*, *P. macronema*, *P. pleurotaenia*, *P. bocourti*, *Wallago attu*,

*W. leeri*, *Bagarius sp.*, *Hemibagrus wyckioides*, *H. nemurus*, *Helicophagus waadersi*, *Lalates sp.*, *Mystus spp.*), Mud perch (*Pristirolepis fasciata*), Glassfish (*Parambassis siamensis*), River loach (*Schistura sp. or Nemacheilus sp.*). During overbank flooding events fish migrate laterally to adjacent flood plains for spawning and feeding.

#### 4.2.2 Wetlands and terrestrial habitats

For the Lower Mekong River system a number of important habitats for conservation can be distinguished, they are:

- River channels;
- Small islands and riverine sand-bars;
- Marshes, small pools and seasonally-inundated floodplain wetlands;
- Seasonally-inundated riparian forest; and
- Inundated grasslands.

The river channels are vitally important for the seasonal longitudinal migration of fish species. The Mekong River and its low gradient tributaries, like the Se bang Fai, are also an important habitat for a distinctive guild of riverine bird species.

Small islands and riverine sand-bars are formed by natural deposition during seasonal high river flow. They form a habitat for pioneer plant communities and breeding sites for waterbirds.

Seasonal wetlands inundate in the wet season when water levels of the Mekong are high. Groundwater and seasonal monsoonal rains maintain other wetlands year-round. Wetlands provide some of the most productive habitats in the Lower Mekong Basin and include reed and sedge beds, swamps, lotus ponds, and inundated forest. They are usually shallow, filled by seasonal rainfall and typically are connected to the river system which in the wet season forms the inundated plain of the Lower Mekong Basin. Submerged communities are dominated by *Ceratophyllum demersum* and *Utricularia aurea*. The seasonal changes in water level of the Mekong inundated plain drives a seasonal migration of large waterbirds between wetlands. In the dry season, many species move to permanent wetlands and grassy plains around Lake Tonle Sap and the Delta, while in the wet season they retreat to higher seasonal wetlands in northern Cambodia and Lao.

In the dry season, these wetlands are vital in maintaining breeding stocks of floodplain fish, including air-breathing species (e.g. gouramies, walking catfish), while in the wet season they function as breeding and nursery grounds for many fish species, the Black fish. These wetlands are important for almost all waterbirds in the Lower Mekong Basin, particularly cormorants, Oriental Darter, Spot-billed Pelican, Greater and Lesser Adjutants, Milky Stork, Woolly-necked Stork *Ciconia episcopus*, Black-necked Stork *Ephippiorhynchus asiaticus*, Painted Stork, the Globally Endangered White-shouldered Ibis *Plegadis davisoni*, Glossy Ibis *P. falcinellus*, Black-headed Ibis *Threskiornis melanocephalus*, White-winged Duck, Pallas's Fish Eagle *Haliaeetus leucoryphus*, Grey-headed Fish Eagle, and the Globally Vulnerable Masked Finfoot *Heliopais personata*.

One of the most important wetland habitats of the Lower Mekong Basin is the seasonally-inundated riparian forest found on the gently-sloping plains adjacent to


lakes, rivers and tributaries and submerged by the seasonal flood of the wet season. Fish use this habitat as a feeding, breeding, and nursery ground and it is important for breeding colonies of large waterbirds.

Seasonally inundated grasslands are common on the floodplains of the Lower Mekong Basin. Close to the water edge, floating or emergent vegetation forms dense mats. As water levels rise, dense mats may dislodge and float, propelled by currents or the wind. The main species include *Achyranthes aquatica*, *Brachiaria mutica*, *Eichornia crassipes*, *Polygonium barbatum* and *Sesbania javanica*. Other plant species found on the upper reaches of the inundated plain include several grasses, including *Echinochloa stagnina*, sedges including *Cyperus pilosus*, *Rhynchospora* sp., and dicotyledons such as *Aeschynomene indica*, *Impatiens* sp., *Ludwigia hyssopifolia* and *Nelumbo nucifera* (lotus). They are of crucial importance for a number of rare and endangered bird species.

According to the Inventory of Wetlands in Lao PDR (Claridge, G., 1996), the project area is a fairly important wetland area, consisting of a mosaic of fresh water lakes, river ponds, rice paddy and fresh water marshes. Most of the wetlands are located north of the Se Bang Fai and is associated with the Houay Vay and the Houay Sayphay. Close to the river there are several old river channels with oxbow lakes, that silted up and form fairly large marshes. Bung Xuak on the southern side of the river, just west of Bung Veun Nua, is the best example. It is possibly the only wetland in the area that retained a significant proportion of its original vegetation. It is also the largest, about 3 km<sup>2</sup>, and has open water at the end of the dry season.

Nearly 9% (2,726 ha) of the Nongbok District, the district covering most of the project area) consists of wetlands. Some 30% of the district (9,400 ha) is under forest.

**Figure 10 Wetlands in the Lower Se Bang Fai area**

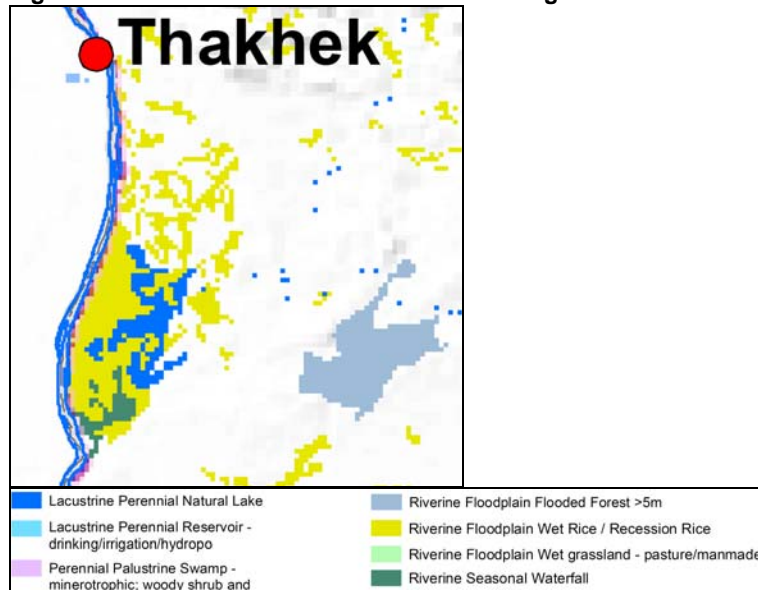

Source: MRC Basin Planning Atlas, Sub area 4L, 2006

#### 4.2.3 Wildlife and rare and endangered species

No information is available on the fauna in the project area. However, it is known that the wetlands of the Lower Mekong Basin support some 15 globally-threatened bird species, namely the Critically Endangered Giant Ibis *Pseudibis gigantea*, the globally Endangered Sarus Crane *Grus Antigone*, Greater Adjutant *Leptotilos dubius*, White-shouldered Ibis *Pseudibis davisoni*, White-winged Duck *Cairina scutulata*, Bengal Florican *Eupodotis bengalensis* and Nordmann's Greenshank *Tringoides guttifer*, the globally Vulnerable Spot-billed Pelican *Pelicanus philippensis*, Lesser Adjutant *Leptotilos javanicus*, Milky Stork *Mycteria cinerea*, Greater Spotted Eagle *Aquila clangula*, Green Peafowl *Pavo muticus*, Masked finfoot *Heliopais personatus*, Black-bellied Tern *Sterna acuticauda*, and Indian Skimmer *Rynchops albicollis*.

Of the reptiles the Siamese Crocodile *Crocodylus siamensis* is Critically Endangered. It was formerly widespread throughout the Lower Mekong Basin but has declined drastically due to excessive hunting and habitat destruction. It is reported to be present in the vicinity of the project area. Also over twenty species of turtles occur in the Lower Mekong Basin, ten of which are listed in the Red Data book including the Chinese three-striped box turtle *Cuora trifasciata* that is Critically Endangered.

Possibly the wetlands in the project area are of importance for one or more of these rare or endangered species.

#### 4.2.4 Protected areas

According to ICEM, 2003, Lao PDR National Report on Protected Areas and Development. Review of Protected Areas and Development in the Lower Mekong River Region, no protected or proposed protected areas are located in the project area.

BirdLife International in Indochina, on its website, indicates that there is one important bird areas (IBA) located in the project area.

### 4.3 Socio-Economic Development

#### 4.3.1 Land use


The project area mainly consists for of agricultural land (rice paddy), grasslands, minor areas of water/wetlands and wood- and shrubland are also encountered. On the natural levees along the Bassac Se Bang Fai seasonal cash crop are grown in riverbank gardens.

Nongbok District, which is totally located within the project area, covers 31,300 ha. Nearly 50% of the area, 14,521 ha, is in use for agricultural purposes, not only for paddy growing (12,807 ha), but also for the cultivation of other crops (1,714 ha). Of the remaining area, 9,400 ha is forest and 2,726 ha is wetland. Table 5 gives an overview of the landuse in the district.



**Table 5 Land use in the Nongbok District**

Landuse type	Area	
	(Ha)	(%)
Agriculture	14,521	46.4
Paddy rice	12,807	40.9
Other crops	1,714	5.5
Forest	9,400	30.0
Wetlands	2,726	8.7
Other	4,653	14.9
Total	31,300	100.0

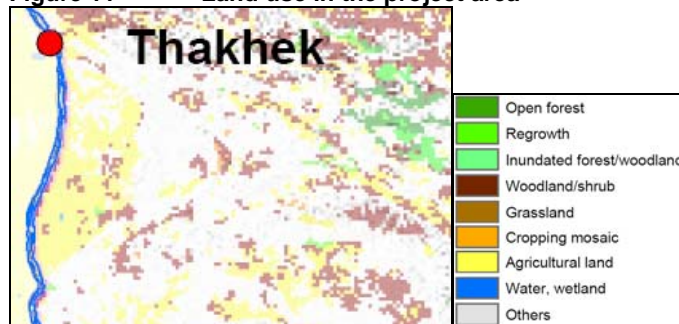**Figure 11 Land use in the project area**

Source: MRC Basin Planning Atlas, Sub-area 4L, 2006

#### 4.3.2 Agriculture

Rice cropping and vegetables growing are the main agricultural activities in the project area. Agriculture is the area's largest sector of employment, with 92 percent of the inhabitants having rice production as part of their livelihood systems. Vegetables and other crops are grown by residents on the somewhat elevated Se Bang Fai river banks, as well as in the flood plains around natural lakes as water recedes. Lowland wet rice is cultivated in the lower lying areas.

##### **Paddy rice cropping**


The Se Bang Fai plain is one of the 4 main rice production areas in central Lao. Success or failure of lowland rice is closely linked to the natural flood cycle and every year part of the crop is damage by the flood. According to Nongbok statistics yields are high, 4.3 ton/ha in the wet season and 6.2 ton/ha in the dry season on irrigated land.

In the project area there are two main types of rice production: rainfed lowland (wet season) paddy and irrigated lowland (dry season) paddy. In the wet season some 10,500 ha are cropped, in the dry season the cropping area is about 2,270 ha. Although food security appears not to be an issue in the area, the Government of Lao (GoL) has embarked on a major program of irrigation development along the Se Bang Fai; most villages along the Se bang Fai now have irrigation pumps (see Figure 12), and a network of canals with water control structures has been constructed to deliver water to the fields in the dry season. There are 9 gated sluices and 25 pumping stations in the district.

Ideally the dry season paddy should provide supplementary rice to farmers, both for consumption and for sale on the local markets. However, the dry season cropping has not been as successful as envisaged. Most of the irrigation pumps are electric, but some run on diesel, which is inefficient and relatively costly. In addition, some of the diesel pumps are in a bad condition, with the result that the total irrigation potential of currently installed pumps and systems is not fully utilized. Other problems are related to the high cost of the agricultural inputs (agro chemicals, irrigation fees etc.) as compared to the returns (low rice prices), soil characteristics (high infiltration rates resulting in rapid seepage), and a high incidence of pests.

The water to be discharged by the Nam Theung-2 dam provides an opportunity for increasing agricultural production during the dry season. A number of large irrigation schemes have been made and are being planned for the Se Bang Fai area, but recent experiences are reason for caution.


**Figure 12** Location of irrigation projects along the lower Se Bang Fai

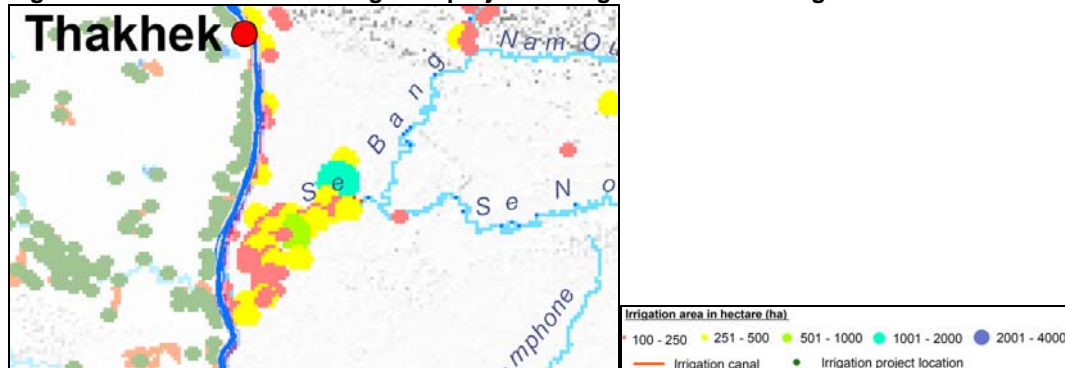

Source: MRC Basin Planning Atlas, Sub-area 4L, 2006



**Figure 13 Wet and dry season paddy cropping in the Lower Se bang Fai area**

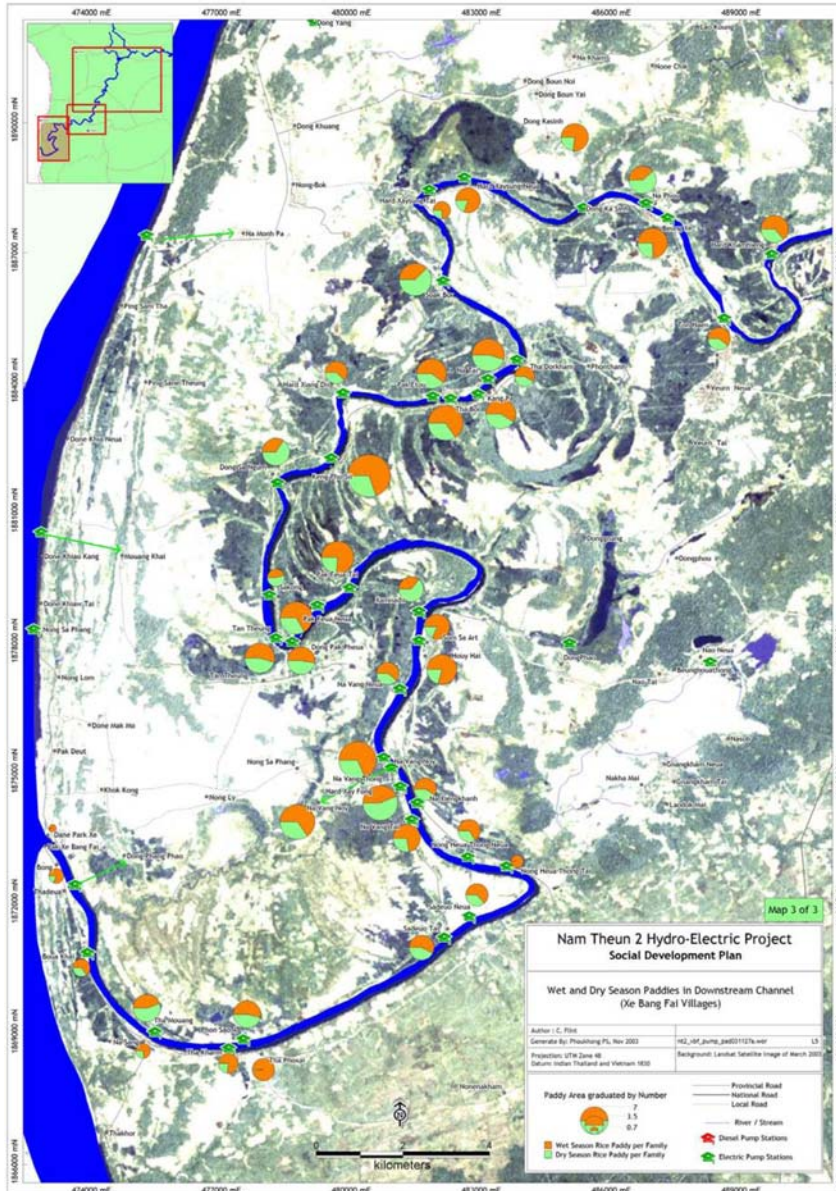

Source: Nam Theun-2 Power Company, 2005b

Crops are grown in 2 overlapping periods; September - December and December - February. The first crops are corn, yam, water melon, long bean, cucumber etc. These are grown in the moist fertile soil on the river banks and tributary banks. The second crop is planted down the river bank as water recedes further. Crops grown are of shorter duration and must be harvested by February - March. Main crops are vegetables (lettuce, garlic, and eggplants) and tobacco. Part of the produce is sold on local markets and tobacco forms the largest single source of cash income. Tobacco is sold not only on the provincial markets, but also in Vientiane and across the border in Thailand. Some villages near the mouth of Se Bang Fai, grow vegetables on river banks and on islands in the Mekong in large quantity for the market.

There are various types of river bank gardens, although three main types can be identified:

- Gardens on the flat land on top of the riverbank. These are more or less permanent garden areas growing either tree crops, bananas, kapok for example, without irrigation, or vegetable crops in the dry season, which are irrigated either by small pumps or by buckets hand carried from the Se Bang Fai;
- Riverside crop fields, usually planted either at the start or the end of the wet season before the river rises, and as the river flow is decreasing. These crops are grown on the higher slopes of the riverbank, and grown on either rainfall (as start of the rainy season) or soil moisture (end of the rainy season and start of the dry season). Crops grown include maize, tobacco and sweet potato; and
- Riverside vegetable gardens, planted almost exclusively in the mid to late dry season and on the lower banks of the river. They are usually planted with vegetables or tobacco.

In the project area, where irrigation systems are fairly well developed, focus is changing from riverbank gardens to gardens watered from the irrigation systems, and thus located next to or in the vicinity of irrigated paddy fields.

### **Agrochemical use**

Information in this section is derived from the Initial Environmental Examination of the Khammouan Rural Livelihood Project (KRLP), Prepared by the KRLP Project Implementation Unit of the Provincial Department of Planning and Investment of the Khammouane Provincial Government (2008).

In 2003, the FAO conducted a case study on pesticide use in Lao. The study found that pesticide use is relatively low compared to in other countries of the region, and that active promotion of pesticides is not widespread. However, the study also found that pesticides are widely available, and that most of those for sale are highly toxic. Folidol, a class 1a pesticide, was found to be the most widely available and used pesticide, even though it is officially banned. It was also reported that 'a clear trend toward increasing use of pesticides is noted, particularly by farmers producing for urban markets. Although these farmers are aware of the dangers, they repeatedly stated that they know of no other way to meet the demands of the market, consumers and middlemen, other than to use more pesticides. The study concluded that merely not promoting pesticides is not enough, and that more concerted policies, strategies, and action are urgently needed.

In general, pest attack on rice crops is low in Lao PDR. Although there is a range of pests mentioned both by farmers, officials and in the literature, these are rarely of economic importance. Consequently pesticide use per unit area of rice is low. A recent survey indicated that in Savannakhet Province 50% of farmers sprayed rice one or more times per year, with 25% sprayed once and 25% sprayed more than once. Most probably insecticide use is more prevalent in the Se Bang Fai plain, where the influence of farming practice in Thailand and the intensity of rice production is high. However, in the Se Bang Fai plain usage is nevertheless still low, with some blanket spraying against brown plant hopper in the dry season but generally being restricted to spot sprays of particularly severe infestations, of for example the rice bug, *Leptocoris oratorius*. Stocks of pesticide do not appear to be kept on the farm (nor by local dealers) as the products are easily accessed from Thailand.

In general pesticide use is higher in irrigated areas, partly to protect the extra investment in the dry season irrigated crop, but also because double cropping leads to an increase in the number and intensity of pests attacking the crop.

Rice diseases are rarely treated with chemicals (e.g. fungicides), weed control with herbicides is also very rare.

Pesticide use for vegetable growing is believed to be significant. The number of treatments applied is apparently not excessive, but every farmer treats his vegetables with insecticides. There has been no analysis of pesticide residues in fresh produce in Lao PDR, since there are no laboratory facilities for this.

Inorganic fertilizers are used predominately on the dry season rice crop, but increasingly also in the wet season. The type of usage varies according to the recommendations of extension workers and local availability. Farmers mentioned using an NPK 16-20-0 compound fertilizer to 'prime' the land at around 200 – 350 kg/ha followed by Urea 46-0-0 at around 50 kg/ha. These fertilizers contains no K, making the rice susceptible to diseases such as brown spot disease in K deficient conditions. Farmers and officials in the Se Bang Fai plain indicated that inorganic fertilizer use appears to follow no particular guidelines with respect to soil analyses or the analysis and usefulness of organic fertilizer. Some inorganic compound fertilizers appear to be used on the basis of availability from donors rather than on need. In the Se Bang Fai plain organic fertilizer, mainly manure, is used in combination with inorganic fertilizer at around 250 kg/ha; a relative low rate, but beneficial if applied annually.

#### 4.3.3 Fisheries

After rice, fish is the most important item on the diet for all ethnic groups in the area. Besides, the sale of fish on local markets adds considerably to the income of most households. Fish is caught with a variety of gear and equipment including explosives, poisonous plants, nylon monofilament gill nets, spears, hook and line, cast nets, scoop nets and many types of trap. Drift and gillnets are the most important gear in terms of the size of fish landings made by fisherman from the Se Bang Fai. Fish is caught all year round by men, women and children. The seasonal fish migrations between the Mekong River and the Se Bang Fai are important periods for fisheries.

The main Se Bang Fai channel is the most important fishing ground during the dry season (when fish concentrate in refuge habitats), while habitats on the floodplain (flooded forests, swamps, backyard ponds, paddy fields) are important during the wet season (See

**Table 6).** Catches consist mainly of cyprinids and catfishes, many of which in-migrate from the Mekong mainstream. Catches in the floodplains also include resident species such as snakehead, mud perch, spiny eels, climbing perch, walking catfish, and gouramies.

**Table 6 Percentage of fish catch caught at different locations**

	Percentage of catch caught at different locations
Se Bang Fai River	54%
Se Bang Fai Tributaries	3%
Paddy fields	14%
Other small bodies of water	10%
Back swamps and natural ponds	19%
Total	100%

**Source: Nam Theun-2 Power Company, 2005b**

Families in the lower reach of Se Bang Fai catch on average 168 kg fish/fam/year, sufficient for daily consumption and the production of 2 - 8 jars (= 22 kg) of 'Padek' /family/year. Padek, salted fermented fish, is the second staple food in Laos, after rice. The remaining catch, on average 20% or some 35 kg/household/y, is sold on the market. Anecdotal information suggests that production has declined over the last 10-15 years. Average fish size and the number of species caught have also declined. The reason for the decline is thought to be overfishing and use of small mesh monofilament gillnets.

#### 4.3.4 Livestock and animal husbandry

In the Lower Se bang Fai area every household has on average 1 - 2 head of cattle, 0 - 1 pig and some 10 chicken. Buffalo's are still an important source of draft power for land preparation, although power tillers are becoming more common, particularly in the larger and more prosperous villages. Cattle are a form of savings, and when needed they are sold for cash to meet household expenditure requirements.

#### 4.3.5 Aquaculture

The level of aquaculture activity in the Se Bang Fai is low, with less than 3% of households involved. Backyard ponds, ricefield fish culture, and village swamp fish culture are the most important types of fish culture. Net cages are least important. No production estimates are available for aquaculture activity in the Project area.

One reason for the low level of aquaculture might be the relative abundance of fish within the river and adjacent wetlands. Lack of infrastructure and well-developed market systems or transport services are other valid explanations, as well as lack of knowledge about fish culturing techniques. However, aquaculture is becoming more common in the lower Se Bang Fai zone, in part due to population pressure and in part due to availability of irrigation waters which are also used in aquaculture.

#### 4.3.6 Tourism

No major tourist attractions are located in the project area.

#### 4.3.7 Roads and infrastructure

The road network in the project area is fairly dense with Road number 13, connecting Thakhet with Savannakhet forming the eastern boundary of the project area. Most villages in the Nongbok District are accessible by road, both in the rainy and in the dry season. There are 81 roads with a total length of 287 km in the district. Of these roads 71 (273 km) can be used in both seasons. There are 5 bridges in the district.

#### 4.3.8 Navigation

The navigation on the Se bang Fai is inconvenient, only small volumes can be transported within fifty kilometers from the junction with the Mekong River. In the wet season the river is navigable for ships with a capacity up to 5 tonnes, in the dry season the capacity of the ships is limited to 0.2 tonne.

### 4.4 Social and Cultural Resources

#### 4.4.1 Population and communities

According to the Nongbok District statistics, the population in 2006 was about 41,000 (7,600 households). Average household size was 5.41 persons and the average annual population growth rate during the period of 2001-2006 was 0.49%.

Ethnicity in Nongbok district is mainly Lao (71%), followed by Phouthyai (25%), Mangkong (3%) and King (1%). 95% of the household in the district is male headed.

Agriculture is the main economic activity in the area. Besides, there is a significant seasonal labour migration to Thailand (25%). A small proportion of the population is occupied in fisheries, business, trade and services. (See Table 7 for details).

**Table 7 Main occupation in Nongbok District, 2006**

Occupation	Number	Percentage
Agriculture	15,293	63%
Fishery/aquaculture	358	1%
Agriculture - Hired laborer	898	4%
Construction - Hired laborer	216	1%
Seasonally working in Thailand	6,000	25%
Business	465	2%
Employee - Private sector	200	1%
Employee - Government	668	3%
Total	24,098	100%

**Source: FMMP-C2, Phase 1, Socio-economic survey, District data-base**

According to the FMMP-C2, Phase 1, Socio-economic survey, District data-base, housing in the Nongbok District consists mainly of semi-permanent (i.e. brick and tin roof) structures (70%), followed by permanent (i.e. concrete) houses (20%) and temporary houses (10%). All agricultural storage structures are temporary. The percentage houses connected to the power grid is very high: 95%.

#### 4.4.2 Water supply and sanitation

Only about 1,000 households in the Nongbok District town are connected to a piped water supply system. Villagers along the Se Bang Fai use river water for a variety of domestic purposes: drinking, cooking, bathing, dish washing, washing of clothes and watering of gardens. Not only the river water is used, other water sources are used as well, depending on water resource availability, water resource developments, season, and personal inclination. They are:

- Se Bang Fai - bank spring;
- Se Bang Fai - dug wells on the rivers edge;
- Tributaries (creeks);
- Rainwater;
- Shallow dug well;
- Deep bore well;
- Lakes, ponds;
- Tapped water;
- Bottled water; and
- Irrigation canal water.

A survey carried out within the framework of the Nam Theung-2 project in 2003 - 2004 showed that the Se Bang Fai is the most important water source in the dry season although for cooking and drinking other sources, mainly deep (bore) and shallow wells, are also important. In the wet season, rain water and the Se Bang Fai are equally important as a source of domestic water.

According to the Survey data 52% of the households in the district is having their own toilet or latrine.

## 5 ENVIRONMENTAL SCREENING OF THE PROJECT

The Lao PDR EIA Decree stipulates that 'No construction or other physical activities shall be undertaken at a project site until an environmental compliance certificate for the project is issued.' Types or sizes of projects which do or do not require EA are presently not specified. Instead, based on the information in the project proposal document, the Development Project Responsible Agency (DPRA) assembles an ad hoc Project Review Team to complete an environmental screening of the proposed project. Projects that are such in nature, size and location that they are assumed to cause minimal environmental impacts do not require further Environmental Assessment. Those projects determined to be non-exempt from EA must proceed to conduct IEE, depending on the findings of the IEE, an Environmental impact assessment (EIA) may be required.

Keeping in mind the above, the outcome of the project screening, applying the project screening table as given in the Best Practice Guidelines for IFRM Planning and Impact Evaluation, indicates the necessity of an environmental assessment (See Table 8). Although no official protected areas are located in Se Bang Fai plain the area is an important wetland area, consisting of a mosaic of fresh water lakes, river ponds and fresh water marshes, these wetlands are important in sustaining fisheries, that are an important additional source of food and income to the rural population.

**Table 8 Results of the environmental screening of the Integrated Flood Risk management Plan for the Lower Se Bang Fai area**

SCREENING QUESTION	Yes	No	Remark
<b>A. PROJECT SITING</b>			
Is the project area adjacent to or within any of the following environmentally sensitive areas?			
– in or near sensitive and valuable ecosystems (e.g., protected areas, wetlands, wild lands, coral reefs, and habitats of endangered species)	X		the area is an important wetland area, consisting of a mosaic of fresh water lakes, river ponds and fresh water marshes. No official protected areas are located in Se Bang Fai plain
– in or near areas with cultural heritage sites (e.g. archaeological, historical sites or existing cultural or sacred sites)		X	-
– densely populated areas where resettlement may be required or pollution impacts and other disturbances may be significant	X		population is concentrated along the river bank where most construction works will take place and in villages on higher grounds. Alternative 3 of the project may require significant resettlement
– regions subject to heavy development activities or where there are conflicts in natural resource allocation		X	-
– watercourses, aquifer recharge areas, or reservoir catchments used for potable water supply	X		river water is an important source for domestic water for a large proportion of the population in the area
– lands or waters containing valuable resources (e.g. fisheries, minerals, medicinal plants, prime agricultural soils)	X		the area is an important rice producing area. Besides fisheries provides additional food and income to the rural population
<b>B. POTENTIAL ENVIRONMENTAL IMPACTS</b>			
Is the project likely to lead to:			
– permanent conversion of potentially productive or valuable resources (e.g. fisheries, natural forests, wild lands)	X		the wetlands in the project area are likely to be effected when flooding reduces. Reduced access to, and flooding of, the floodplain reduces fisheries potential greatly
– destruction of natural habitat and loss of biodiversity or environmental services provided by a natural system	X		a reduction of the flooded area will effect the flora and fauna diversity (fish and water birds). Under alternative 3 upstream migration of fish will be hampered
– risk to human health and safety (e.g. from generation, storage, or disposal of hazardous wastes, inappropriate occupational health and safety measures, violation of ambient water or air quality standards)		X	limited, some construction activities related health and safety risks are to be expected. Improved flood protection on the other hand reduces risks and improves food security and thus health
– encroachment on lands or rights of indigenous peoples or other vulnerable minorities		X	-
– displacement of large numbers of people or businesses	X		under Alternative 3 a considerable number of people will have to be resettled
– absence of effective mitigation or compensation measures		X	-



## **6 IDENTIFICATION AND ASSESSMENT OF THE POTENTIAL ENVIRONMENTAL IMPACTS**

### **6.1 Introduction**

For the identification of potential environmental impacts and mitigating measures the checklist of Environmental, Economic and Social Parameters for Flood Risk Management Projects, as given in the Best Practice Guideline for IFRM Planning and Impact Evaluation, has been used.

According to the checklists the relevant parameters can be classified as follows:

- Environmental concerns related to project siting;
- Environmental concerns related to project implementation and construction activities;
- Environmental concerns related to project design, management, operation and maintenance; and
- Positive impacts related to project design, management, operation and maintenance.

In Appendix 1 the completed checklist is given.

In the following paragraphs the environmental parameters that are relevant within the framework of the proposed project will be discussed on an item by item base.

For the assessment of the significance of the impacts no formal assessment procedure was used and only a distinction between no significant impacts, small significant impacts, moderate significant impacts and major significant impacts was made. This assessment was based on expert judgment, taking into account the following general criteria to assess the significance of the impacts:

- Magnitude of the impact: the expected severity;
- The extent of the impacted area;
- The duration or frequency of the impact; and
- The risk involved; the probability of a serious impact occurring.

Where relevant a distinction is made between impacts occurring in the study area itself and off-site impacts, expected to manifest themselves in areas outside the proper project area. Possible mitigating measures to offset or reduce negative impacts and measures to enhance positive impacts are proposed. Possible transboundary impacts receive special attention.

### **6.2 Impacts and mitigating measures related to project siting**

#### **6.2.1 Land acquisition**

Under Alternative 1 and 2 the dikes along the Se Bang Fai, and partly the Mekong River, will be heightened. Because of their relatively elevated position, these river banks are the areas where population is concentrated. Construction/heightening of in total 93 km dike is planned. Land may actually not have to be acquired, probably

people living on the banks of the river only have to be relocated temporarily and can return to their former lands once construction is finalized. Under alternative 1 and 2 also 11 km of irrigation/drainage canals have to be constructed. Assuming an average canal width of 4 m (including banks), a total of 44,000 m<sup>2</sup> has to be acquired. Construction of a diversion channel, a component additional to dike construction under Alternative 2, will entail additional land acquisition, some 200,000 m<sup>2</sup> and resettlement, as well as loss of agricultural area.

Alternative 3, construction of a storage reservoir, will require the acquisition of a large area: the impoundment area of the reservoir is estimated at 10,500 ha. This area includes agricultural land of 18 villages. Resettlement is a big issue under this Alternative.

Mitigation:

The area to be acquired should be minimized by careful design. If land acquisition and resettlement is unavoidable, losses have to be compensated and assistance has to be provided to relocate and restore living conditions. Compensation and assistance have to be described in a carefully designed and implemented Participatory Resettlement Action Plan.

#### 6.2.2 Encroachment on historical monuments and cultural values

Whether or not pagodas, temples, sacred sites and graves or other sites of historical or cultural value are located in on or near proposed construction sites is not yet known. It is to be assumed that the reservoir construction under Alternative 3 will result in the loss of a considerable number of historical monuments and cultural values, since in total 18 villages will be flooded.

Mitigation:

Avoid, minimise or offset activities by careful design and consultation with local communities. Compensate for damage to or displacement of sacred sites, graves, etc.

#### 6.2.3 Encroachment into forests, swamps, loss of precious ecology

The project area is a fairly important wetland area, consisting of a mosaic of fresh water lakes, river ponds, rice paddy and fresh water marshes. Important ecosystems associated with the wetlands are the seasonally-inundated riparian forests and grasslands found on the gently-sloping plains adjacent to lakes, rivers and tributaries and submerged by the seasonal flood of the wet season.

Direct impacts of encroachment are probably limited. However, the indirect impact of the project on the natural areas may be significant: increased protection against flooding and provision of irrigation infrastructure will result in an extension of agricultural activities to areas that are presently not used for rice growing. Other important indirect impacts on natural areas and ecology are related to the changing flood pattern, see Section 6.3.2.

Mitigation:

Avoid, minimise or offset encroachment into forests, swamps and the loss of precious ecology by careful design and consultation with local communities.

Compensate or offset losses through replacement. An awareness campaign to inform the local communities of the importance of the area's biodiversity and the benefits of sustainable use should start.

#### 6.2.4 Impediment to movement of wildlife, cattle and people, including obstruction to navigation and obstruction of fish migration paths

Dike construction will not result in impediment to movement of wildlife, cattle and people, it may even improve mobility since the dikes will be flood free during the flood season. Irrigation canals may form more serious obstructions for moving wildlife, cattle and people. This will certainly be the case for the 20 m wide Xelat Diversion Canal, if constructed under Alternative 3. Creation of a large storage reservoir, Alternative 3, will seriously impede the movement of wildlife, cattle and people

Also serious is the obstruction of fish migration paths. With the onset of the flood fish migrate up the Se Bang Fai and during the main flood they spread over the flood plain where they feed. Construction of a dam in the Se Bang Fai, possibly combined with the construction of a control gate at the confluence of the river with the Mekong (Alternative 3) will make the up-river migration impossible. Embankment will prevent the fish from reaching suitable spawning/nursing and feeding habitats in the floodplain.

#### Mitigation:

Careful planning, design, and operation. Sufficient bridges/crossing over the irrigation canals/diversion canal have to be built. Construction of fish passages is advised, whereas the operation of the gates should be such that water flow between the Mekong River and the Se Bang Fai is possible in periods of maximum migration. Controlled flooding of the existing wetlands could help in sustaining their important ecological function for migratory fish.

#### 6.2.5 Loss of the aesthetic, visual or recreational amenity or value of the area.

No significant impacts are foreseen, since the area has limited aesthetical and recreational value.

### 6.3 Potential impacts related to project implementation and construction activities

#### 6.3.1 Soil erosion, increased turbidity and sedimentation of rivers and watercourses

Soil erosion during the construction phase may result from destruction of the vegetation or surface runoff over unprotected soil at the construction sites. Total magnitude of the works to be carried out is fairly large and overall impact could be considerable. Runoff water from exposed soil will be sediment laden and result in an increase in turbidity of the receiving water bodies. Excavation and disposal of excavated materials can also increase turbidity in the area close to the activity, either by direct disturbance of the soil or due to spillage of sediment laden water. Increased turbidity will in turn intensify the existing sedimentation processes, as the sediments will resettle close to the construction areas. Increased turbidity has an adverse impact on all water organisms, not only on the fish but also on the invertebrate (zooplankton, zoobenthos) consumed by them. Benthic communities may smother as a result of re-sedimentation of suspended sediments and this may lead to a loss of species and a decrease in benthic biomass. High turbidity can negatively influence vital functions of the organisms, and

may lead to complete or partial extinction of plankton and benthic species in high turbidity areas. However, these impacts are only local and temporary.

Mitigation:

Soil erosion and the consequent negative impacts on downstream water quality can be reduced by minimizing clearing activities, by compacting and protecting exposed soil as much as possible and by replanting areas where the vegetation has been damaged. If needed, construction activities should be limited to the dry season. Fencing may be applied to protect particularly sensitive areas. Removal of sediments (dredging) may be applied to maintain a certain water depth, e.g. for navigation purposes.

6.3.2 Loss of habitats/productive land by disposal of dredge spoil or solid waste/soil disposal

See 6.2.1. soil excavated for the construction of irrigation drainage canals will probably be deposited directly along the canals to form small embankments, the amounts are limited. Of the estimated overall loss of 44,000 m<sup>2</sup> (6.2.1) about half will be loss resulting from deposition of spoils. Construction of the Xelat Flood Diversion will result in a fairly large amount of excavated material, assuming an average depth of the canal of 4 m, some 800,000 m<sup>3</sup> of soil will have to be disposed of.

Mitigation:

Works should be planned and designed in such a way that excavated soil can be used for the embankment construction.

6.3.3 Loss of soil fertility

No significant impact expected.

6.3.4 Worker accidents

A main health and safety issue during the construction phase is accidents of construction workers who are at risk at the workplace because they work with and near heavy machinery.

Mitigation:

Severity and frequency of accidents can be reduced considerably when construction equipment is well maintained and safety regulations and procedures are strictly implemented in conformity with the prevailing Labor Law, safety gear is issued and worn, and when construction workers are trained on safety procedures.

6.3.5 Accidents from increased traffic (construction equipment)

Movement of vehicles and equipment to and from the construction sites will cause traffic volume along the national highway and along the local roads to increase considerably. This will increase the likelihood of accidents.

Mitigation:

Alternative routes should be selected to avoid densely populated areas as much as possible. Where construction traffic has to cross communities driving speed limits should be set and enforced. Local population has to be informed by means of a community awareness program.

6.3.6 Disruption of access to villages, damage of local roads with heavy machinery

During the construction period access to villages may be temporary disrupted and local roads may be damaged by heavy machinery. This may result in loss of income from farming, fishing and processing activities and temporary disruption of local businesses and access to community services (schools, clinics).

Mitigation:

Alternative routes should be identified to facilitate continued access. Disruptions should be limited to periods with low economic activity, e.g. outside the harvesting period. Losses of business income or wages have to be compensated. If needed community facilities/services should be relocated to guarantee continue access. Local population has to be informed by means of a community awareness program.

6.3.7 Temporary obstruction to navigation

No significant impact expected.

6.3.8 Disruption of utility services

No significant impact expected.

6.3.9 Noise/vibration/air pollution (including dust) from construction activities

Noise, vibration and air pollution as a result of the construction activities will be temporary but significant.

At present, noise levels in the rural areas in the project communes are low. During the construction phase noise may be caused by generators, construction equipment and vehicles used for material transport. Noise of this type of activities can reach 90 dBA at 15 meters distance, which is generally above the permissible noise levels for public and residential areas. However, construction will not take place in public or residential areas.

The major potential source of vibration is heavy vehicle movement. The routes used for material transport will not pass through densely populated areas. Therefore, this impact will be negligible.

In the construction phase the air near the construction sites may be polluted by toxic gasses (SO<sub>2</sub>, NO<sub>x</sub>, CO, volatile organic compound (VOC) from construction machines and dust. Dust pollution may be significant during the construction phase, particularly in the dry months.

Mitigation:

Vehicles and construction equipment have to be well maintained and checked for operational noise levels, vibration and gas emissions to meet standards. Mufflers should be installed and maintained as necessary to meet these standards. If the distance between the construction site and sensitive receptors (residential areas, schools, offices) is insufficient, special measures of noise prevention should be considered: e.g. installation of adequate barriers. The routes used for material transport should avoid densely populated areas as much as possible and when needed vehicles should proceed at reduced speed. Transport and construction have to be minimal during rest times.

Dust production can be reduced by periodic watering of construction sites (important in the dry season) and access roads. Vehicles transporting construction material (sand, cement, stones) should be covered to prevent dust dispersion.

6.3.10 Soil/(ground)water contamination as a result of leakage and inappropriate storage of fuels and other chemicals, dumping of construction wastes or improper sanitation (worker camps)

Surface run-off from construction sites, leakage of combustibles and greases from construction equipment and discharge of domestic wastewater and solid wastes at construction workers camp sites may form a source of soil and (ground)water pollution during the construction period. Loss of flora and fauna, and increased risk of health problems, e.g. skin rashes and eye infections from contaminated surface water, may be the result. Contamination of drinking water sources may lead to health problems like diarrhea and dysentery.

Mitigation:

(Ground) water and soil pollution at construction sites can be minimized by containment of fuels stored on site and off-site refuelling, by following appropriate procedures and by proper maintenance of equipment. Disposal of solid waste (construction waste, sand, stones, etc.) and waste grease and oil from construction equipment to ponds, rivers or wells should be avoided: wastes have to be collected and transported to approved disposal sites. Sanitation facilities for construction workers should be provided to minimize the risk of transmission of diseases. The Contractor has to install adequate sanitation systems (for example mobile toilet facilities) for workers or require them to use public sanitation facilities to prevent untreated domestic waste discharge. Wastewater has to be collected and treated mechanically before being discharged to rivers, ponds or the soil.

### 6.3.11 Social/community disruption

Conflicts between construction workers and local people may be caused by differences in customs and traditions, differences in income, and encroachment of workers into historical or traditional sites.

Mitigation:

To avoid problems between construction workers and local people, construction workers should be recruited as much as possible locally, as such they will be familiar with local customs and traditions. Goods and services have to be purchased as much as possible locally. If workers from other areas are recruited, they should receive a proper awareness program about local customs and appropriate behavior.

### 6.3.12 Health impacts

Dust pollution may affect to health of workers and people living in the vicinity of the construction sites and transport routes. High concentrations of VOC, CO and NO<sub>x</sub> in truck emissions may have a negative impact on the health of construction workers and local residents. However, the exposure is only temporary. For impacts related to contaminated water see Section 6.3.10.

Influx of non-local workers for project construction and other people attracted by economic opportunities brings about an increased risk of sexually transmitted diseases, including HIV/AIDS, and other infectious diseases.

Mitigation:

The Contractor will be responsible for development and implementation of an occupational health and safety program for construction workers and for provision of medical facilities on the site. A proper domestic and human waste management plan has to be designed and implemented. A robust HIV/AIDS awareness and prevention program targeting workers and people in surrounding communities should be implemented and local health clinics need to be supported to meet the increased demands. For mitigating measures to reduce or offset impacts related to poor water quality see Section 6.3.10.

### 6.3.13 Increased pressure on water supply and sanitation facilities

Influx of non-local workers for project construction and other people attracted by economic opportunities may put pressure on the existing water supply and sanitation facilities. This may result in health risks related to poor drinking water and sanitation conditions.

Mitigation:

Appropriate planning and design of water supply and sanitation facilities for worker camps.

#### 6.3.14 Employment opportunities for local people

This is a positive impact of the project, to enhance this impact, contractor contracts should specify employment for local workers and local purchase of goods and services.

#### 6.4 Potential negative impacts related to project design, management, operation and maintenance

These impacts are mainly related to project induced changes in the hydrology/hydraulics: the timing, extent, depth and duration of flooding, which may result in a loss of flooding related benefits.

##### 6.4.1 Loss of agricultural productivity

Information gathered during Focal Group discussions in the area showed that paddy yields after a year with a high flood are not different from yields in a year after a year with a normal flood. Also there was no difference in required agro-chemical inputs. Apparently the silt deposition during the flood does not improve the soil fertility and there are no positive impacts of flushing of contaminants or sanitation (killing pests and bugs) of the soil.

Reduced flooding will reduce the replenishment of groundwater and surface water bodies in the area, which will have a negative impact on the amount of surface and ground water available for agriculture in the dry season.

##### Mitigation:

Provision of irrigation water will off-set the negative impacts of reduced availability of surface and groundwater in the dry season.

##### 6.4.2 Loss of capture fisheries production

After rice, fish is the most important item on the diet for all ethnic groups in the area. Besides, the sale of fish on local markets adds to the income of most households. Fish is caught all year round by men, women and children. The seasonal fish migrations between the Mekong River and the Se Bang Fai are important periods for fisheries.

The main Se Bang Fai channel is the most important fishing ground during the dry season (when fish concentrate in refuge habitats), while habitats on the floodplain (flooded forests, swamps, backyard ponds, paddy fields) are important during the wet season.

Reduced flooding of the floodplains will have a significant negative impact on fish stocks, both in the floodplain itself and in the river. Construction of a flood storage dam, Alternative 3, will bring an end to the migration runs up the river. At present fishing is most intensive during these migration periods. On the other hand, the construction of a dam will increase the possibilities for capture fisheries and aquaculture in the newly created reservoir.



Mitigation:

Allow sufficient flooding to maintain fish migration patterns and fish spawning, breeding, nursing and feeding areas.

6.4.3 Loss of wetland areas/productivity

Reduced flooding will have a significant negative impact on the biodiversity in the area. Species composition of flora and fauna will change and the diversity and extent of water bodies and swamps in the floodplain will decrease. Sixty-seven fish species have been recorded in the lower Se Bang Fai. No endemic species were among these. Most of the recorded species are highly migratory. Adults and juveniles spend the dry season in deep refuge pools in the mainstream Mekong. At the onset of the wet season, they migrate upstream until they encounter a tributary, and then swim up the tributary until they reach a floodplain or another suitable spawning/nursing habitat. There are over thirty medium and large size species of cyprinid and pangasiid catfish which exhibit this general migration pattern.

The first major fish migration of the year commences at the beginning of the wet season. At that time, according to villagers, a large number of fish species begin migrating up the Se Bang Fai, and its larger tributaries, while other fish species are believed to move from deep-water pools to spawning areas in the Se Bang Fai.

These two migrating groups include the following taxa: Cyprinids (*Labeo chrysophekadion*, *Labiobarbus* sp., *Sikukia gudgeri*, *Hypsibarbus* sp., *Puntioplites* sp.), Catfish (*Pangasius larnaudii*, *P. macronema*, *P. pleurotaenia*, *P. bocourti*, *Wallago attu*, *W. leeri*, *Bagarius* sp, *Hemibagrus wyckioides*, *H. nemurus*, *Helicophagus waadersi*, *Lrides* sp., *Mystus* spp.), Mud perch (*Pristiolepis fasciata*), Glassfish (*Parambassis siamensis*), River loach (*Schistura* sp. or *Nemacheilus* sp.). During overbank flooding events fish migrate laterally to adjacent flood plains for spawning and feeding.

In the dry season 'Black fish' species remain in lakes and swamps on the floodplain, where they are able to survive harsh conditions. The open waters and wetlands are vital in maintaining a breeding stock of these species. A decrease in number or area of the floodplain lakes, or even a later arrival of the floodwater, results in drying out of the floodplain lakes and ponds or the development of very poor water quality conditions and ultimately in a loss of species like snakehead, mud perch, spiny eels, climbing perch, walking catfish, and gouramies.

It will be clear that under Alternatives 1 and 2 the survival rate of 'Black fish' in the floodplain will decrease considerably and that lateral migration to spawning and feeding areas in the floodplain will be impossible for 'White fish'. Under alternative 3, upstream fish migration in the Se Bang Fai will be impossible and will ultimately lead to the disappearance of most of these migratory species.

Mitigation:

Allow sufficient flooding to safeguard silt and water supply to the wetlands.

#### 6.4.4 Reduced possibilities for navigation/transportation by boat

Construction of a flood gate at the mouth of the Se Bang Fai as well as construction of a storage reservoir near the confluence with the Xe Noi River will seriously hamper navigation.

#### 6.4.5 Change in water availability in the dry season

Flooding in the area will be prevented for the bigger part. This implies that replenishment of groundwater and surface water bodies, ponds and lakes in the flood plain with flood water will not take place.

#### Mitigation:

An important element of the project is the construction of irrigation canals to provide the area with water during the dry season. As such the project will improve the water availability in the dry season.

#### 6.4.6 Changes in river morphology, salt water intrusion and delta growth

Flood protection measures in the Se Bang Fai area will only result in a very limited reduction of the storage of flood waters. Impacts on the main Mekong discharges will be negligible and impacts on downstream river morphology, saltwater intrusion in the delta and delta growth are not expected.

### 6.5 Positive impacts related to project design, management and operation and maintenance

#### 6.5.1 Increased safety for population living in the flood prone areas

Overall the project will have a positive impact on human safety in the area. People will be better protected against flooding, and the likelihood of loss of life will decrease.

#### 6.5.2 Reduced sanitation and public health problems in the flood season

Overall the project will have a positive impact on human health situation in the area. The food situation in the area will probably improve, since rice production, will increase when irrigation facilities are in place and an additional crop can be grown in the dry season. However, this may partly be off-set by a decrease of the amount of fish available in the flood season.

Participants in the Focal Group discussions in the Nongbok District in the Se Bang Fai project area did not specifically mention poor water quality as an environmental risk of flooding, as did people in the Cambodian Delta. However, health problems, like eye sores, dysentery, dengue fever, malaria and skin diseases, emerging after the flooding, when people start to work on the contaminate fields, were specifically mentioned. This contamination with pathogens is related to the spread of human and animal wastes

during the flood, when sanitary conditions are very poor. Hence, reduced flooding will probably reduce these health problems.

Fertiliser use in the district is limited, and pesticide use is reported to be almost zero. Stocks of agro-chemicals are brought to safe places before the flood arrives and for the period 1996 to 2006 no flood damages to fertiliser stocks have been reported. The risk of pollution of the flood water with fertilisers/pesticides is therefore assumed to be low, and hence there is no positive effect of reduced flooding.

### 6.5.3 Decrease in flood damages to crops, infrastructure and ecosystem

The Se Bang Fai floodplain, downstream of the crossing with Road 13, experiences flooding problems during the rainy season nearly every year. The risk in the Nongbok District, which covers most of the lower Se Bang Fai floodplain, has been estimated at some USD 1.8 million per year under the actual land use conditions. Extrapolating the results of the Nongbok District to the flood prone area downstream of the national Road 13, it is estimated that the flood risk in the lower Se Bang Fai area is of the order of USD 2-3 million per year. 90% of this risk is related to agricultural damages.

Flooding not only has an impact on floodplain ecology, also the ecology of the river channel itself and the riparian zone may be affected. The quality of river water may change considerably during a flood. Turbidity levels of the river generally rise sharply as compared to the turbidity in low flow periods. High turbidity is primarily the result of the contribution of sediment rich surface runoff to the flood and erosion of the river bed and banks. However, also an increased growth of algae, induced by increased levels of nutrients, may add to turbidity. High sediment contents may have a negative impact on aquatic organisms: fish gills may clog and decreased penetration of light in the water column results in decreased photosynthesis and lower water temperatures. As a consequence oxygen levels in the water may drop, a phenomenon that may be more serious when exotic plants that are intolerant of extended inundation are flooded, since decay of the organic matter extracts oxygen from the water.

Flooding of rural areas may result in contamination of flood waters with pesticides and herbicides and nutrients from fertilizers. This may certainly be the case when storage facilities of these agro-chemicals flood. Animal and human waste, either from open pit latrines or flooded septic tanks, contaminates the flood water with organic material and pathogens. High organic waste levels may result in reduced oxygen levels affecting aquatic life. Pathogen contamination is a threat to human health. Flooding of open solid waste dumps is another source of pollution, depending on the nature of the wastes this may result in increased levels of organic matter, chemical pollutants or microbiological pollutants in the flood water. Esthetical impacts, floating debris, may also result from flooding of dump sites.

High nutrient contents, nitrogen and phosphorous, may be limiting to the growth of the native floodplain and riparian plants and may enhance the growth of invasive species. Poor water quality in general may result in fish kills and impact on other aquatic biota.

Impacts related to physical disturbance are often related to forces acting upon biota, for example, destruction of riparian vegetation (stripping) results in a decrease in size and connectivity of habitats and thus in reduced structural complexity of the riparian zone.

Loss of the riparian vegetation has a negative impact on the stability of the river banks.

Another form of physical disturbance is the coverage of flora and sometimes fauna with a layer of sediment. This may result in mortality of floodplain plants and fauna. Mortality may also be the result of prolonged inundation.

Yet another form of physical processes inducing impacts is the spread of organisms with the flood water. Exotic species, e.g. floating weeds, can be flushed out of the river into the floodplains and become invasive in floodplain ecosystems over large areas. Flood events also may be important in the release of exotic fish species from outside aquaculture ponds.

It will be clear that all these impacts of flooding on ecology and the environment will become less severe, once the project is implemented.

#### 6.5.4 Opportunities to increase agricultural production

The main objective of the project is to reduce flooding of the lower Se Bang Fai floodplain. Realizing this objective would already imply an increase in agricultural production. It has been estimated as part of the Stage 1 analysis that the average annual damage in the present situation is 2 to 3 million USD, of which 90% can be attributed to damage to agriculture. In other words, crops with a value of 1.8 to 2.7 million USD are lost every year. This is equivalent to a prevented loss of 9,000 to 13,500 ton rice per year.

Of more importance is the fact that provision of irrigation infrastructure, a second objective of the project, will make a second rice crop possible in the area.

#### 6.5.5 Improvement mobility/better road transportation network

Most probably heightening/improvement of the embankment will be combined with the construction of roads on these embankments. Also, banks along irrigation/drainage canals are usually used as footpaths/roads. As such implementation of the project is likely to improve the transportation network and improve mobility.

#### 6.5.6 Poverty reduction and improved food security

Overall the project will have a positive impact on poverty reduction and food security. Food (rice) production, and so food security, will increase. This is not necessarily the case for the amount of fish available in the flood season.

Besides, jobs generated for the execution of the construction works will reduce poverty of the local population. The same is valid for the intensification of the agriculture, that will follow the provision of irrigation infrastructure. This will create a fairly large number of jobs, not only in agriculture, but also in related economic sectors: transportation, agro-business etc.

## REFERENCES

- Claridge, G.F., 1996, An Inventory of Wetlands of the Lao PDR. IUCN-The World Conservation Union, Bangkok.
- ICEM, 2003. Lao PDR National Report on Protected Areas and Development. Review of Protected Areas and Development in the Lower Mekong River Region, Indooroopilly, Queensland.
- Khammouan Rural Livelihood Project Implementation Unit of the Provincial Department of Planning and Investment of the Khammouane Provincial Government, 2008, Initial Environmental Examination of the Khammouan Rural Livelihood Project (KRLP).
- Kottelat, M, 2001, Fishes of Laos. Wildlife Heritage Trust, Colombo, Sri Lanka.
- Kottelat, M and A.J. Whitten, 1996, Freshwater biodiversity in Asia with special reference to fish. World Bank Technical Papers 343, i-ix, pp 1 – 59.
- Mekong Secretariat, 1981, Feasibility Study of Floodway and small structures.
- MRC, 2006, Basin Development Plan
- MRC, 2006, Planning Atlas of the Lower Mekong Basin, Sub-area 4L.
- MRC, 2007, Diagnostic study of water quality in the Lower Mekong Basin. MRC Technical Paper No. 15.
- Nam Theun-2 Power Company, 2005a, Environmental Assessment and Management
- Plan of the Nam Theun 2 Hydropower Development Project.
- Nam Theun-2 Power Company, 2005b, Social Development Plan, Volume 3, Downstream Areas.
- Vongvixay, A., 2008, Potential development in Xe bang Fai (XBF). Report prepared for FMMP-C2, Stage-1.

### Appendix 1 Checklist of Environmental, Economic and Social Impacts

CHECKLIST OF ENVIRONMENTAL, ECONOMIC AND SOCIAL PARAMETERS FOR FLOOD RISK MANAGEMENT PROJECTS										
Environmental Concerns		Related Impacts		Recommended Feasible Mitigation Measures		No Significant Impact	Significant Impact			
							Small	Moderate	Major	
<b>A</b>	<b>Environmental concerns related to project siting</b>									
	1	Land acquisition	1	Loss of productive land and/or sources of income. Displacement of households, and/or economic activities. Social/ community disruption.	1	Avoid or minimize by careful design. If not possible, compensate for losses and provide assistance to relocate and/or restore living conditions/livelihoods. Prepare & implement participatory Resettlement Action Plan.			X	
	2	Encroachment on and/or damage to historical, cultural, religious or other sites and monuments that are important to the community and/or to social groups	2	Loss of valued sites. Disruption of social / community rituals. Indirect impacts: Loss of tourism potential. / income.	2	Avoid, minimise or offset activities by careful design and consultation with local communities. Compensate for damage to or displacement of sites, graves, etc.	X			
	3	Encroachment into or restricted access to forest/swamplands / wetlands	3	Loss of biodiversity, rare and endangered species. Loss of forest/swamp / wetland related production functions. Indirect impacts: Increased household expenditures for food, building materials, medicines, etc., that were harvested. Reduced strategies to deal with food shortages. Increased risks of poverty.	3	Avoid or minimize by careful design and consultation with local communities. Compensate and/or offset economic losses through replacement of resources, identification of alternative income sources, etc.			X	
	4	Loss of agricultural/aquaculture land	4	Loss of household income from sales and/or work as hired labor (with different impacts for men and women, landless HH). Loss of business revenues and wage employment (commercial agriculture, agro- and fish processing, etc.)	4	Consultation with affected communities and HH to identify and implement feasible alternative income sources. Training for new job skills, establishment of micro-enterprises. Compensation for economic losses.		X		

CHECKLIST OF ENVIRONMENTAL, ECONOMIC AND SOCIAL PARAMETERS FOR FLOOD RISK MANAGEMENT PROJECTS										
Environmental Concerns			Related Impacts		Recommended Feasible Mitigation Measures		No Significant Impact	Significant Impact		
								Small	Moderate	Major
				Indirect impacts: Increased HH expenditures for food; reduced food security. Distress sales of land and other assets. Increased risk of out-migration to look for work. Increased poverty.						
	5	Impediment to movements of wildlife,, including obstruction of fish migration paths	5	Impediment of wildlife, reduction in biodiversity and fish stocks Indirect impacts: Loss of income from fishery	5	Careful planning, design, and operation, construction of fish passages	X			
	6	Impediment to movements of people (e.g., navigation) and their animals	6	Disruption of economic activities and social movements.	6	Careful planning and design		X		
	7	Loss of aesthetic, visual or recreational value of the areas	7	Loss of precious values, economic losses	7	Careful planning and design	X			
<b>B Environmental concerns related to project implementation and construction activities</b>										
	1	Soil erosion	1	Water quality impact, loss of productive soil, sedimentation problems Indirect impacts: Reduced drinking water quality; higher agricultural input costs / reduced productivity and incomes.	1	Minimise clearing activities, limit activities to dry season, optimise soil cover and apply soil management techniques to minimise soil loss		X		
	2	Increased turbidity	2	Impact on flora and fauna, sedimentation problems. Indirect impacts: Reduced drinking water quality (stream/rivers & water supply systems)	2	Apply fencing, use silt screens in sensitive areas		X		
	3	Sedimentation of river beds	3	Loss of habitat, problems with navigation Indirect impacts: Temporary	3	Remove deposited sediments		X		

CHECKLIST OF ENVIRONMENTAL, ECONOMIC AND SOCIAL PARAMETERS FOR FLOOD RISK MANAGEMENT PROJECTS										
Environmental Concerns			Related Impacts		Recommended Feasible Mitigation Measures		No Significant Impact	Significant Impact		
								Small	Moderate	Major
				restrictions on navigation/accessibility for economic activities, social networks						
	4	Loss of habitats	4	Loss of biodiversity, reduction in fish stocks Indirect impacts: Reduced incomes from fishing/fish processing (differential impacts on men and women); reduced food security	4	Careful planning and design of disposal sites			X	
	5	Loss of soil fertility	5	Loss of agricultural production Indirect impacts: Loss of income (potential differential impacts on men and women); reduced food security; increased poverty risks	5	Careful planning and design of soil movement, set aside fertile topsoil. Supply fertilisers	X			
	6	Worker accidents	6	Health impacts, economic losses due to injuries, loss of life; increased public health care costs	6	Implement safe working practices through training, site supervision and provision of safety equipment			X	
	7	Traffic accidents	7	Health impacts, economic losses due to injuries, loss of life; increased public health care costs	7	Identify alternative routes, limit & post driving speeds. Provide community awareness programs.		X		
	8	Disruption of access to productive land (e.g., farm land, fishing areas, forests) and/or to community facilities/services	8	Temporary loss of income from farming, fishing and processing activities (differential impacts on men and women); reduced food security. Temporary disruption of local businesses, business income, wage income for employees. Temporary disruption of community services (e.g., access to clinics)	8	Identify alternative routes to facilitate continued access; limit disruptions to periods of low economic activity, e.g. outside harvest periods Compensate for loss of business income and employee wages Assist to temporarily relocate community facilities/services to maintain access.		X		




CHECKLIST OF ENVIRONMENTAL, ECONOMIC AND SOCIAL PARAMETERS FOR FLOOD RISK MANAGEMENT PROJECTS										
Environmental Concerns			Related Impacts		Recommended Feasible Mitigation Measures		No Significant Impact	Significant Impact		
								Small	Moderate	Major
	9	Obstruction to navigation	9	Temporary restricted access and/or extra costs for transport related to economic activities; restricted fishing activities Temporary restricted and/or more expensive transport to support social network.	9	Identify alternative routes, limit to periods of low economic activity, e.g. outside main fishing periods		X		
	10	Disruption of utility services	10	Temporary disruption and/or extra costs for local businesses, economic activities (e.g., agricultural processing) and community facilities/services (e.g., health clinics)	10	Careful planning and quick repair in case of accidents. Provide community awareness and information programs.		X		
	11	Noise/vibration/air pollution	11	Temporary reduced living conditions (dust, noise); temporary increased risks of health impacts (e.g., due to dust)	11	Limit working hours in populated areas, use proper and well maintained equipment			X	
	12	1. Soil /water contamination related to leakage and inappropriate storage of fuels and other chemicals, dumping of construction wastes or improper sanitation	12	Loss of flora and fauna. Increased risks of health problems, e.g., skin rashes/eye infections from contaminated surface water, cuts, abrasions, etc., from unsafe dumping of construction wastes. Contamination of drinking water sources with related health risks (diarrhea, dysentery).	12	Containment of fuels stored on site and off-site refuelling., follow appropriate procedures, proper maintenance of equipment, collection and proper handling of construction wastes, provision of proper sanitation facilities		X		
	13	2. Groundwater pollution related to leakage and inappropriate storage of fuels and other chemicals, dumping of construction wastes or improper sanitation	13	Contamination of drinking water sources with related health risks (diarrhea, dysentery).	13	Containment of fuels stored on site and off-site refuelling., follow appropriate procedures, proper maintenance of equipment, collection and proper handling of construction wastes, provision of		X		

CHECKLIST OF ENVIRONMENTAL, ECONOMIC AND SOCIAL PARAMETERS FOR FLOOD RISK MANAGEMENT PROJECTS										
Environmental Concerns			Related Impacts		Recommended Feasible Mitigation Measures		No Significant Impact	Significant Impact		
								Small	Moderate	Major
						proper sanitation facilities				
	14	Influx of non-local workers for project construction and other people attracted by economic opportunities	14	Social tensions due to competition for paid work and other economic opportunities related to FRM project, inappropriate behaviour of non-local people, lack of knowledge/respect for local customs	14	Contractor contracts specify (i) employment of local workers, (ii) local purchase of goods and services, (iii) awareness programs about local customs and appropriate behavior			X	
	15	Health impacts/disease hazards due to influx of workers and other non-local people	15	Increased risks of sexually transmitted diseases including HIV/AIDS; increased risks of other infectious diseases	15	Contractor contracts specify robust HIV/AIDS awareness and prevention program targeting workers and people in surrounding communities. Plan proper domestic and human waste management. Support local health clinics to meet new demands		X		
	16	Pressure on water supply and sanitation due to influx of workers	16	Increased health risks related to poor drinking water and sanitation conditions (diarrhea, dysentery) Possible loss of business income due to lack of adequate water supply/sanitation	16	Appropriate planning and design of water supply and sanitation facilities, including supplementary resources. Plan proper domestic and human waste management; Support for local health clinics to meet new demands	X			
	17	Employment opportunities for local people	17	Poverty reduction, improved welfare	17	Contractor contracts specify (i) employment of local workers, (ii) local purchase of goods and services, (iii) awareness programs about local customs and appropriate behavior				X
<b>C</b>	<b>Environmental concerns related to project design, management, operation and maintenance</b>									

CHECKLIST OF ENVIRONMENTAL, ECONOMIC AND SOCIAL PARAMETERS FOR FLOOD RISK MANAGEMENT PROJECTS										
Environmental Concerns			Related Impacts		Recommended Feasible Mitigation Measures		No Significant Impact	Significant Impact		
								Small	Moderate	Major
		Project induced changes in hydrology/hydraulics: the timing, extent, depth and duration of flooding, resulting in:								
	1	Loss of agricultural production (loss of flood benefits)	Increased input costs and reduced yields; loss of business revenue and household incomes; possible loss of jobs for agricultural workers Indirect impacts: reduced food security, increased incidence of distress sales of land and other assets, increased incidence of out-migration to look for work, increased poverty risks		Allow sufficient flooding to safeguard silt and water supply and prevent pests Strengthen and provide agricultural extension and other technical assistance to enhance agricultural productivity, diversify crop production, expand livestock raising, etc. (including services targeting men's and women's agricultural activities)		X			
	2	Loss of capture fisheries production (loss of flood benefits)	Loss of household incomes Indirect impacts: reduced food security, increased poverty risks		Allow sufficient flooding to maintain fish migration patterns and fish spawning, breeding, nursing and feeding areas					X
	3	Loss of wetland area/productivity (loss of flood benefits)	Ecological impacts; loss of biodiversity. Economic losses (loss of income, extra expenditures), decreased food security, increased poverty risks		Allow sufficient flooding to safeguard silt and water supply					X
	4	Hindrance to navigation/ transport by boat (loss of flood benefits)	Economic losses due to reduced accessibility and/or higher transport costs for businesses, marketing and other economic activities. Social impacts due to reduced mobility / travel to maintain social networks		Allow water levels high enough to make navigation possible		X			
	5	Reduced water availability in the dry season (loss of flood benefits)	Economic losses due to lack of water for agriculture, other economic		Allow sufficient flooding to safeguard replenishment of					X

CHECKLIST OF ENVIRONMENTAL, ECONOMIC AND SOCIAL PARAMETERS FOR FLOOD RISK MANAGEMENT PROJECTS										
Environmental Concerns			Related Impacts		Recommended Feasible Mitigation Measures		No Significant Impact	Significant Impact		
								Small	Moderate	Major
				activities. Social and health impacts due to lack of safe drinking water; decreased food security, increased poverty		groundwater and surface water storage				
	6	Changes in river morphology		Economic losses due to hindrance to navigation, impacts on sand mining industry		Dredging, construction of bank protection works	X			
	7	Changes in salt water intrusion		Damage to agriculture and aquaculture; loss of business revenue and household incomes; potential loss of jobs for agricultural/aquaculture workers		Maintain minimum flows	X			
	8	Decline in delta growth		Reduction in economic opportunities due to decline in land accretion		Maintain minimum (sediment carrying) flows	X			
<b>D Positive impacts related to project design, management, operation and maintenance</b>										
	1	Increased safety		Improved well-being, reduced poverty						X
	2	Improved sanitation and health situation		Improved well-being, reduced poverty						X
	3	Decreased flood damage		Improved well-being, reduced poverty, improved food security						X
	4	Increased agricultural production		Improved well-being, reduced poverty, improved food security						X
	5	Improved mobility/transportation network		Social and economic welfare, reduced poverty					X	
	6	Poverty reduction/improved food security		Improved well-being						X

**Appendix 7 Administrative levels in the water sector in Lao PDR**

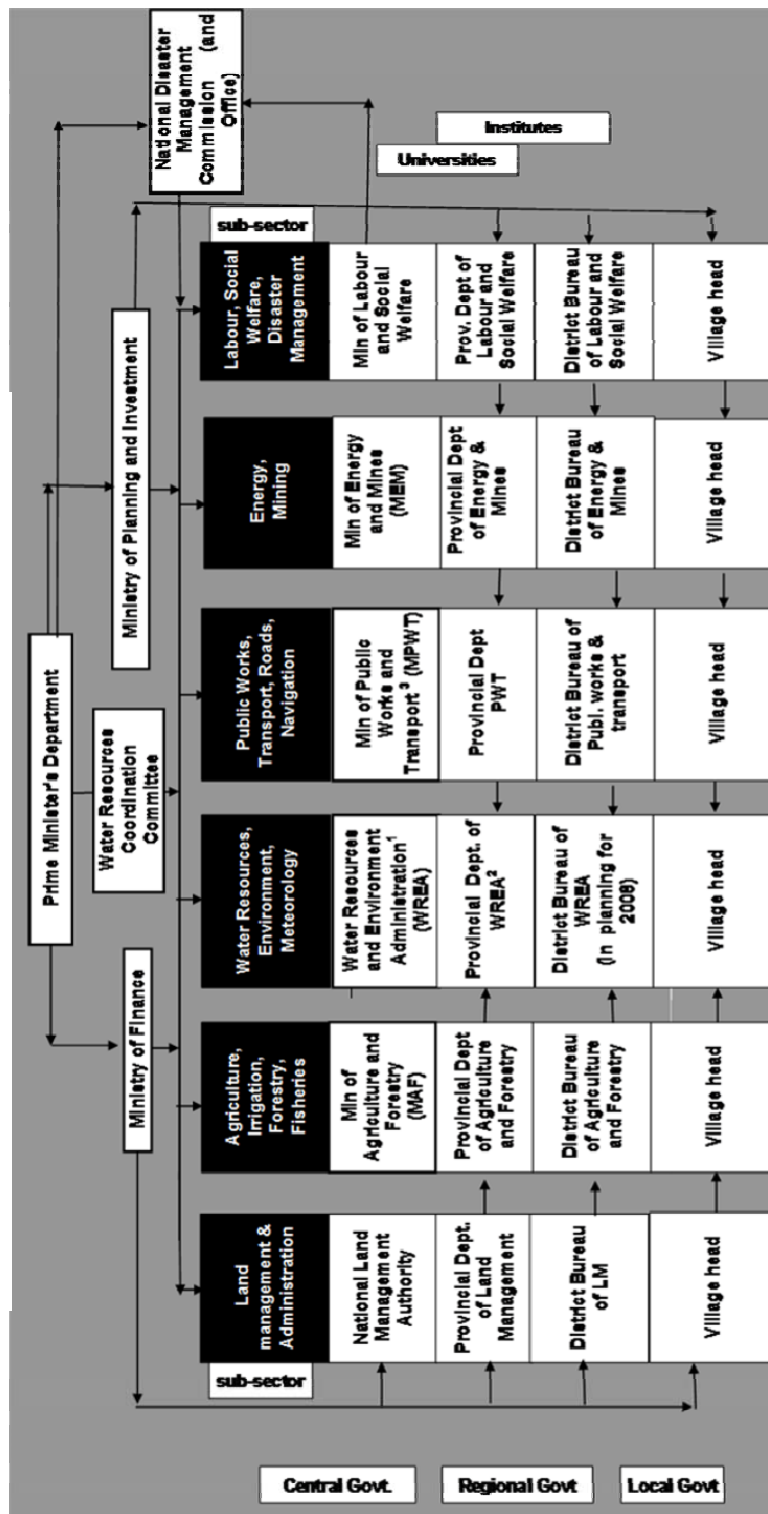

\* Remarks:

- WREA consists of various relevant departments:
- How ever, the proposal about the formation of WREA and its composition, have not formally been approved by cabinet and P.M. yet
- 2) The formation of Provincial (and regional/local) departments of WREA is still in the planning and not operational yet
- 3) The Ministry of Public Works and Transport was recently split off from Ministry of Communication, Transport, Post and Construction it has various relevant departments for IWRM/IFRM:
  - Dept. of Housing & Urban Planning
  - Dept. of River works
  - Roads Dept.
  - Watersupply Authority
- 4) Ministries generally have offices till at the District level, decisionmaking at village level by local government

- Water Resources Department  
 - Environment Dept. (previously part of Min. of Science, Technology and Environment (MoSTE))  
 - Leo National Mekong Committee  
 - Dept of Meteorology and Hydrology  
 - Institute of Water Resources and Environment (tentatively)